




AS-Interface flat cable VAZ-FK-R-BK

- Oil resistant
- Cable piercing technique
- Resistant to environmental influence
- Resistant to bending
- Suitable for drag chains and abrasion resistant
- Reverse polarity protected due to the shape of the cable
- Does not give off silicone
- Graduations in meters

AS-Interface flat cable for external auxiliary voltage up to 24 V



Dimensions

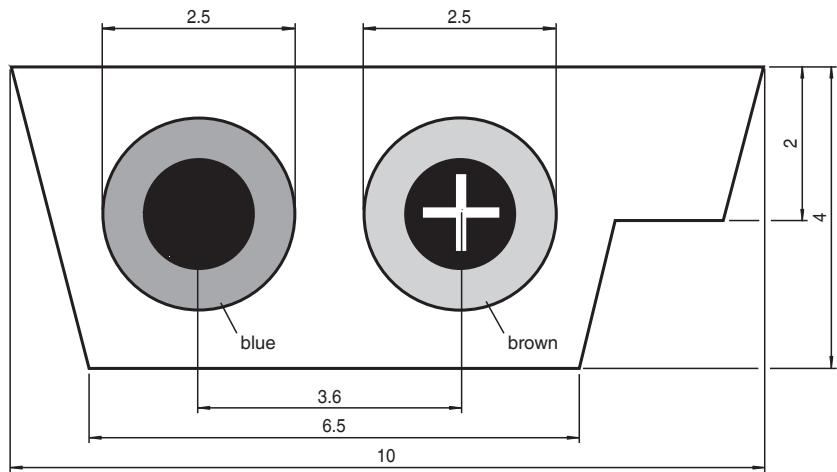

Technical Data

General specifications	
UL File Number	E130266
Electrical specifications	
Nominal voltage	24 V
Current loading capacity	According to DIN VDE 0298 Part 4, Table 6, Column 4
Ambient conditions	
Conductor temperature	Operating mode: 90 °C (363 K) Short-circuit: 200 °C (473 K)
Ambient temperature	-40 ... 105 °C (-40 ... 221 °F) at standstill, -30 ... 105 °C (-22 ... 221 °F) in motion
Mechanical specifications	
Core cross section	Copper tin-plated, extra-fine wire, class 6 in accordance with DIN VDE 0295 cross-section 1.5 mm ²
Bending radius	min. permissible bend radii in accordance with DIN VDE 0298 Part 3, Table 2 Bending stress only permitted on the wide side of the cable
Tension loading	max. 50 N/mm ² on laying acc. to DIN VDE 0298 Part 3
Material	Thermoplastic Elastomer (TPE)
Core insulation	Thermoplastic Elastomer (TPE)
Cable	UL-Style 2103

Technical Data

Color	black (similar to RAL 9005)	
Drag chain suitability		
Drag chain cycles		min. 10000000
Motion velocity		max. 4 m/s
Traverse distance		10 m
Acceleration		max. 4 m/s ²
Cable length		100 m
Flammability		
Cable	Flame-retardant as per IEC 60332-1-2 and UL 1581, Sec. 1061	

Accessories

	VAZ-FK-ED3	AS-Interface end seal for flat cable
---	-------------------	--------------------------------------

Release date: 2022-06-17 Date of issue: 2022-06-17 Filename: 040924_eng.pdf