



Model Number


VMA-3+P/L1-2M-PUR-V1-W

Valve connector, Form A, 3+PE, LED, PUR cable

Features

- Valve connector according EN 175301-803 A/ISO 4400 (previously DIN 43650)
- Moulded seal

Dimensions

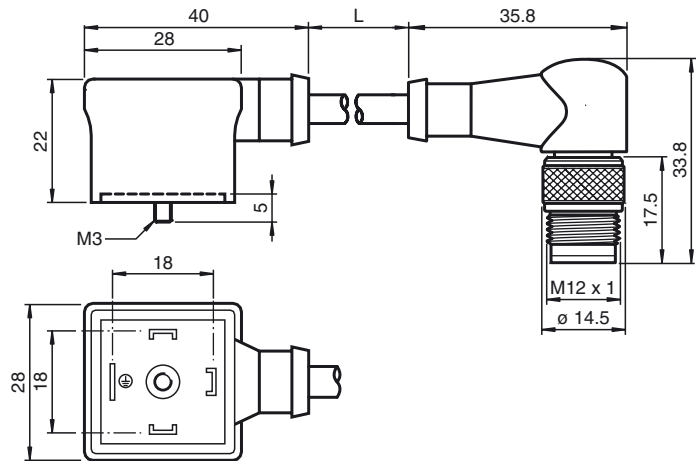

Technical data

General specifications

Number of pins	3 + PE
----------------	--------

Indicators/operating means

LED green/yellow	Operating display
------------------	-------------------

Electrical specifications

Operating voltage	U_B	24 V AC/DC
Operating current	I_B	max. 10 A
Volume resistance		< 10 mΩ

Ambient conditions

Ambient temperature	-40 ... 80 °C (-40 ... 176 °F)
Cable: -25 ... 80 °C (-13 ... 176 °F)	

Mechanical specifications

Degree of protection	IP67
Connection	Valve connector Form A

Material	
Contacts	CuZn ; CuSn
Body	PUR
Cable	PUR
Core insulation	PVC

Cable	
Sheath diameter	Ø 5.7 mm
Bending radius	> 10 x cable diameter, moving
Color	black
Cores	(4 + 1) x 0.5 mm ²
Conductor construction	16 x 0.2 mm Ø
Length	L 2 m

Electrical connection

