



SMART Current Driver KCD2-SCD-Ex1.ES

- 1-channel isolated barrier
- 24 V DC supply (Power Rail)
- Current output up to 650 Ω load
- HART-IP and valve positioner
- Line fault detection (LFD)
- Housing width 12.5 mm
- Up to SIL 3 acc. to IEC/EN 61508



Function

This isolated barrier is used for intrinsic safety applications.

The device repeats the input signal from a control system to drive HART I/P converters, electrical valves, and positioners located in a hazardous area.

Digital signals are superimposed on the analog values at the field side or control side and are transferred bi-directionally.


The current is transferred via a DC/DC converter and repeated at the output terminals.

An open or short field circuit presents a high impedance to the control side to allow alarm conditions to be monitored by the control system.

Test sockets for the connection of HART communicators are integrated into the terminals of the device.

A fault is signalized by LEDs and a separate collective error message output.

Connection

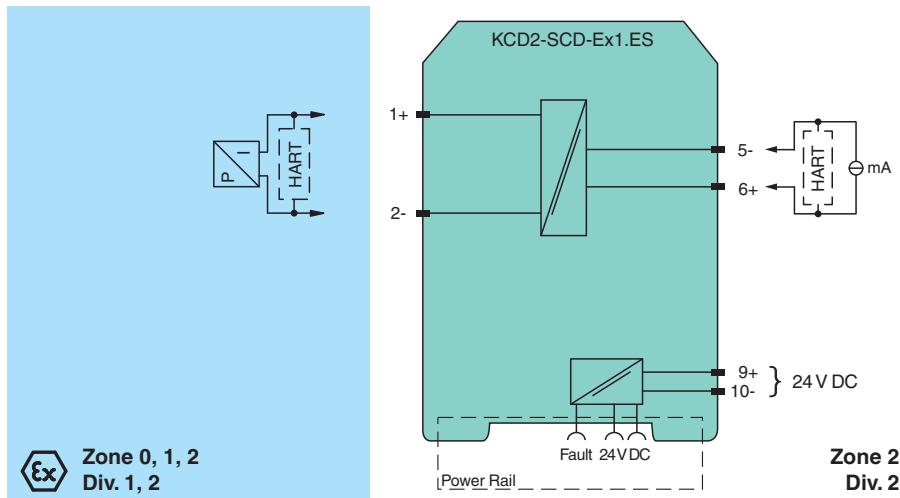

Technical Data

General specifications

Signal type	Analog output	
-------------	---------------	--

Functional safety related parameters

Safety Integrity Level (SIL)	SIL 3	
------------------------------	-------	--

Supply

Connection	Power Rail or terminals 9+, 10-	
------------	---------------------------------	--

Rated voltage	U_r	19 ... 30 V DC
---------------	-------	----------------

Ripple	$\leq 10\%$	
--------	-------------	--

Rated current	I_r	$\leq 33\text{ mA at }24\text{ V}$
---------------	-------	------------------------------------

Power dissipation	$\leq 700\text{ mW at }20\text{ mA and }500\text{ }\Omega\text{ load}$	
-------------------	--	--

Technical Data

Power consumption	$\leq 800 \text{ mW}$	
Input		
Connection side	control side	
Connection	terminals 5-, 6+	
Input signal	4 ... 20 mA, limited to approx. 25 mA	
Input voltage	open loop voltage of the control system $< 30 \text{ V}$, in line fault mode $< 60 \text{ V}$	
Voltage drop	approx. 6 V at 20 mA	
Input resistance	$> 100 \text{ k}\Omega$, with field wiring open or $< 50 \Omega$	
Output		
Connection side	field side	
Connection	terminals 1+, 2-	
Voltage	$\geq 13 \text{ V}$ at 20 mA	
Current	4 ... 20 mA	
Load	100 ... 650 Ω	
Ripple	20 mV _{rms}	
Line fault detection	field wiring open or $< 50 \Omega$ and test current $< 2 \text{ mA}$	
Transfer characteristics		
Deviation	at 20°C (68°F), 4 ... 20 mA $< 0.1\%$ of full scale, incl. non-linearity and hysteresis	
Influence of ambient temperature	$< 2 \mu\text{A/K}$ ($-20 \dots 70^\circ\text{C}$ ($-4 \dots 158^\circ\text{F}$)); $< 4 \mu\text{A/K}$ ($-40 \dots -20^\circ\text{C}$ ($-40 \dots -4^\circ\text{F}$))	
Frequency range	field side into the control side: bandwidth with $0.5 \text{ V}_{\text{pp}}$ signal 0 ... 3 kHz (-3 dB) control side into the field side: bandwidth with 1 mA_{pp} signal 0 ... 3 kHz (-3 dB)	
Rise time	10 to 90 % $\leq 10 \text{ ms}$	
Galvanic isolation		
Input/Output	basic insulation according to IEC/EN 61010-1, rated insulation voltage $300 \text{ V}_{\text{eff}}$	
Input/power supply	basic insulation according to IEC/EN 61010-1, rated insulation voltage $300 \text{ V}_{\text{eff}}$	
Output/power supply	reinforced insulation according to IEC/EN 61010-1, rated insulation voltage $300 \text{ V}_{\text{eff}}$	
Indicators/settings		
Display elements	LEDs	
Labeling	space for labeling at the front	
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU	EN 61326-1:2013 (industrial locations)	
Conformity		
Electromagnetic compatibility	NE 21:2017 EN 61326-3-2:2018	
Degree of protection	IEC 60529	
Protection against electrical shock	UL 61010-1:2012	
Ambient conditions		
Ambient temperature	$-40 \dots 70^\circ\text{C}$ ($-40 \dots 158^\circ\text{F}$)	
Mechanical specifications		
Degree of protection	IP20	
Connection	screw terminals	
Mass	approx. 100 g	
Dimensions	12.5 x 124 x 114 mm (0.5 x 4.9 x 4.5 inch) (W x H x D), housing type A2	
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001	
Data for application in connection with hazardous areas		
EU-type examination certificate	CESI 20 ATEX 016 X	
Marking	 II (1)G [Ex ia Ga] IIC  II (1)D [Ex ia Da] IIIC  I (M1) [Ex ia Ma] I	
Output	Ex ia	
Supply		
Maximum safe voltage	U_m	250 V AC (Attention! U_m is no rated voltage.)
Equipment	terminals 1+, 2-	

Technical Data

Voltage	U_o	25.2 V
Current	I_o	100 mA
Power	P_o	630 mW
Internal capacitance	C_i	5.7 nF
Internal inductance	L_i	negligible
Certificate		CESI 20 ATEX 017 X
Marking		Ex II 3G Ex ec IIC T4 Gc
Galvanic isolation		
Input/Output		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Output/power supply		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Directive conformity		
Directive 2014/34/EU		EN IEC 60079-0:2018 , EN 60079-11:2012 , EN 60079-7:2015
International approvals		
UL approval		E106378
Control drawing		116-0471 (cULus)
IECEx approval		
IECEx certificate		IECEx CES 20.0009X
IECEx marking		[Ex ia Ga] IIC , [Ex ia Da] IIIC , [Ex ia Ma] I Ex ec IIC T4 Gc
General information		
Supplementary information		Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .

Assembly

Front view

