



Female connector, field-attachable


V1D-G-ABG-PG9

- D coding for Ethernet
- Conforms to PROFINET
- Field-attachable, shieldable
- Metal housing
- Iris spring shielding
- UL Recognized Component

Female connector M12 straight D-coded 4-pin, for cable diameter 5 - 8 mm, shielded, field-attachable



Dimensions

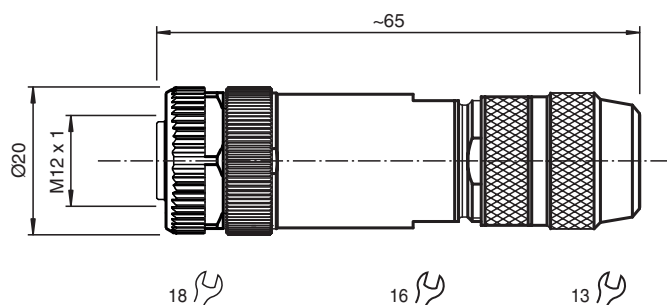

Technical Data

General specifications

Connector 1	
Connection	socket
Construction type	M12
Style	straight
Locking	screw connection
Number of pins	4
Coding	D-coded

Electrical specifications

Rated operating voltage	U _e	max. 250 V AC/DC
Rated operating current	I _e	max. 4 A
Surge protection		Category II
Insulation resistance		min. 10000 MΩ

Conformity

Degree of protection	EN 60529
Fieldbus standard	PROFINET
Plug connection	connector M12 x 1 : IEC 61076-2-101

Release date: 2024-12-05 Date of issue: 2024-12-05 Filename: 70104267_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS


Technical Data

Component category		CAT5 (IEC 11801)
Approvals and certificates		
UL File Number		E363587
Ambient conditions		
Ambient temperature		-40 ... 85 °C (-40 ... 185 °F)
Pollution degree		3
Mechanical specifications		
Plug connector		
Tightening torque		0.6 Nm
Tool installation		straight knurling , hexagon nut SW = 18 mm
Mating cycles		min. 100
Shielding		iris spring shielding
Degree of protection		IP67
Connection		screw terminals for max. 0.75 mm² / AWG 18
Cable		
Sheath diameter		5 ... 8 mm
Core cross section		0.75 mm² / 18 AWG max.
Installation		screw terminals 0.4 Nm pressure nut 1 Nm
Mass		51 g
Note		installation: shield diameter ≤ 5.5 mm see instruction leaflet
Material		
Plug connector		
Screw connection		Zinc diecast, nickel-plated
Body		Zinc diecast, nickel-plated
Contact surface		gold plated (Au)

Connection



Installation

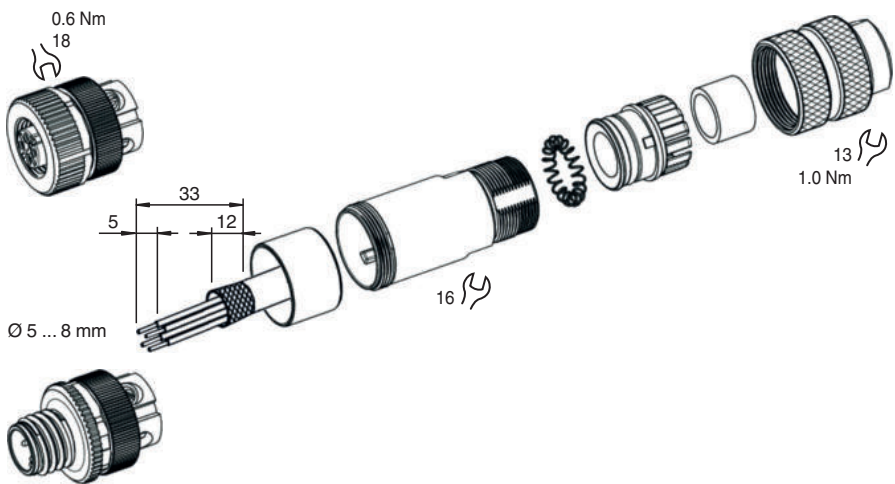

Release date: 2024-12-05 Date of issue: 2024-12-05 Filename: 70104267_eng.pdf