

Female cordset

V112-G-15M-PVC




- Degree of protection IP67 / IP68 / IP69
- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching

Female cordset single-ended M12 straight A-coded, 12-pin, PVC cable black



Dimensions

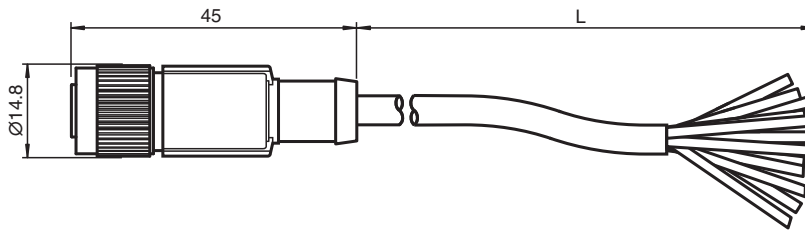

Technical Data

General specifications

Customization	Stripped length 50 mm , wire end ferrule	
Connector 1		
Connection	socket	
Construction type	M12	
Style	straight	
Locking	screw connection	
Number of pins	12	
Coding	A-coded	
Connector 2		
Connection	cable end	

Electrical specifications

Operating voltage	U_B	30 V
Operating current	I_B	1.5 A
Surge protection		category II

Conformity

Degree of protection	EN 60529
Plug connection	connector M12 x 1 : IEC 61076-2-101

Ambient conditions

Ambient temperature	
Plug connector	-28 ... 90 °C (-18.4 ... 194 °F)
Cable, fixed	-28 ... 90 °C (-18.4 ... 194 °F)
Pollution degree	3

Mechanical specifications

Release date: 2023-08-30 Date of issue: 2023-08-30 Filename: 70104467_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Plug connector		
Tightening torque		0.4 Nm
Tool installation		straight knurling
Mating cycles		min. 100
Degree of protection		IP65/IP67/IP68
Cable		according to IEC/EN 60228 (DIN VDE 0295) class 5
Sheath diameter		7.2 mm
Bending radius		54 mm
Sheath color		black (similar to RAL 9005)
Number of cores		12
Core cross section		0.14 mm²
Cores color		Core 1: brown Core 2: blue Core 3: white Core 4: green Core 5: pink Core 6: yellow Core 7: black Core 8: grey Core 9: red Core 10: violet Core 11: grey/pink Core 12: red/blue
Core construction		18 x 0.1 mm
Length	L	15 m
Material		
Plug connector		
Screw connection		Zinc diecast, nickel-plated
Body		TPU, black
Seal		NBR
Contact surface		Ni/Au
Flammability		HB
Cable		
Sheathing		PVC
Core insulation		PVC
Flammability		flame-resistant

Connection



1)		BN
2)		BU
3)		WH
4)		GN
5)		PK
6)		YE
7)		BK
8)		GY
9)		RD
10)		VT
11)		GYPK
12)		RDBU

Accessories

	MH V1-SCREWDRIVER	Torque screwdriver (0.6 Nm)
	MH V1-BIT M12	plug-in cap M12
	V1/V3-LABELHOLDER	Label holder

Accessories

	V1/V3-LABEL	Label plate
	MH V1-Holder	Modular universal holder for M12 connectors
	V1-CLIP	Unlocking protector for M12 connector
	V1-MARKING-RING-COLOR	Marking rings for M12 connectors, various colors

Release date: 2023-08-30 Date of issue: 2023-08-30 Filename: 70104467_eng.pdf