





Junction Box Ex i, Glass-Fiber Reinforced Polyester (GRP)

GR.TJI.13.13.09.B-S0008

- Carbon loaded, antistatic glass-fiber reinforced polyester
- Installation in Zone 1, Zone 2, Zone 21 and Zone 22
- Ex ia and Ex tb certified
- 129 mm x 129 mm x 85 mm
- Modern design with high impact resistance
- Easy installation due to easily accessible mounting points
- Easy cover opening without damage due to multiple pry points
- Bottom face cable glands polyamide, 2x M20; left side cable gland polyamide, 1x M20; right side cable gland polyamide, 1x M20
- Blue marking for use with Ex i circuits
- Image is generic for this device type and may deviate from the specific variant

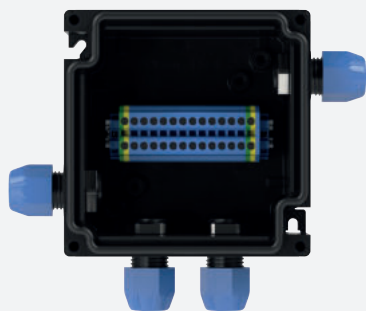

Dimensions

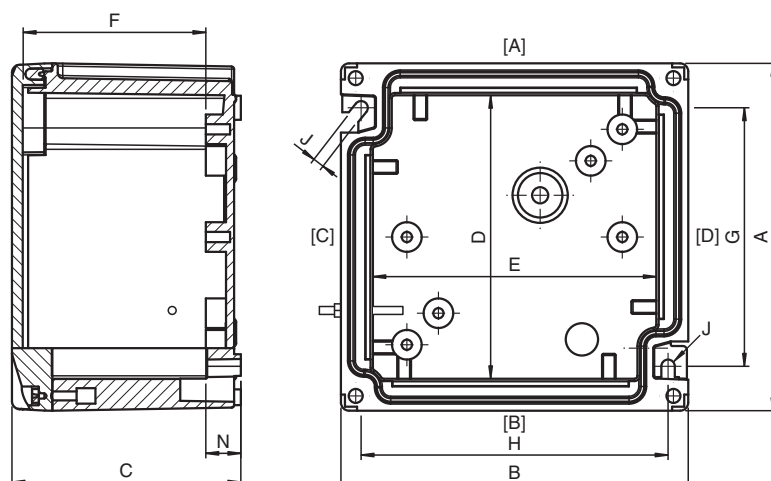

Dimension values see data table.

Image and drawing are generic for this device type and may deviate from the specific variant.

Technical Data

Electrical specifications

Operating voltage	60 V AC / DC max. for ATEX / IECEx
-------------------	------------------------------------

Mechanical specifications

Enclosure cover	fully detachable
Cover fixing	
Screws	M6 stainless steel combination Phillips and slotted screw
Number	4
Tightening torque	3.5 Nm
Cover seal	foamed silicone
Degree of protection	IP66
Cable entry	thru-holes

Release date: 2023-09-29 Date of issue: 2023-09-29 Filename: 70118400_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Cable entry face B		
M20 quantity		2
M20 series		Cable Glands, Plastic
M20 type		CG.PIDS1.M20.*
M20 clamping range		6 ... 12 mm
Cable entry face C		
M20 quantity		1
M20 series		Cable Glands, Plastic
M20 type		CG.PIDS1.M20.*
M20 clamping range		6 ... 12 mm
Cable entry face D		
M20 quantity		1
M20 series		Cable Glands, Plastic
M20 type		CG.PIDS1.M20.*
M20 clamping range		6 ... 12 mm
Terminal assembly		
Rail orientation		horizontal
Number of horizontal rails		1
Usable length per horizontal rail		67.5 mm
Terminal type		12 x MUT 2.5 blue 2 x MUT 2.5 PE
Terminal capacity		2.5 mm ²
Material		
Enclosure		carbon loaded, antistatic glass-fiber reinforced polyester (GRP)
Finish		inherent color black
Mass		approx. 1 kg
Dimensions		
External dimension (A)		129 mm
External dimension (B)		129 mm
External dimension (C)		85 mm
Internal dimension (D)		106 mm
Internal dimension (E)		106 mm
Internal dimension (F)		68 mm
Mounting holes distance (G)		96 mm
Mounting holes distance (H)		114 mm
Mounting holes diameter (J)		5 mm
Thickness of mounting brackets (N)		13 mm
Mounting		2 screws
Ambient conditions		
Ambient temperature		-40 ... 60 °C (-40 ... 140 °F)
Data for application in connection with hazardous areas		
EU-type examination certificate		CML 17 ATEX 3255X
Marking		Ⓔ II 2 GD Ex ia IIC T* Gb Ex tb IIIC T** °C Db T6/T80 °C @ Ta +40 °C T4/T130 °C @ Ta +60 °C
International approvals		
IECEx approval		IECEx CML 17.0144X
UKCA approval		CML 21 UKEX 3896X
Further approvals		further on request
Conformity		
Degree of protection		EN60529
CE marking		0102

Release date: 2023-09-29 Date of issue: 2023-09-29 Filename: 70118400_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.comUSA: +1 330 486 0002
pa-info@us.pepperl-fuchs.comGermany: +49 621 776 2222
pa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com
 **PEPPERL+FUCHS**

Technical Data

General information

Supplementary information	EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com .
---------------------------	--

Release date: 2023-09-29 Date of issue: 2023-09-29 Filename: 70118400_eng.pdf