



RFID Transponder


IUC76-28ST-M-FR1

- Operating frequency 865 ... 868 MHz
- Complies with EPC Gen2 (ISO/IEC 18000-63)
- Sturdy housing, suitable for rough industrial use
- Optimized for mounting in metal

RFID Transponder



Dimensions

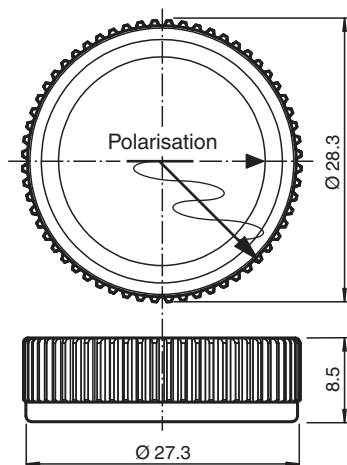

Technical Data

General specifications

Operating frequency	865 ... 868 MHz
Polarization	linear

Memory

Chip Type	Higgs-3 (Alien)
Memory Bank 00 (Reserved)	64 Bit
Memory Bank 01 (EPC/UII)	96 ... 480 Bit
Memory Bank 10 (TID)	96 Bit
Memory Bank 11 (User memory)	512 Bit
Read cycles	unlimited
Write cycles	> 100000
Data retention period	50 years @ 77 °C (170.6 °F)

Directive conformity

Radio equipment	
Directive 2014/53/EU	EN 302208
RoHS	
Directive 2011/65/EU (RoHS)	IEC/EN 63000

Release date: 2024-06-14 Date of issue: 2024-06-14 Filename: 70119949_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Standard conformity		
Degree of protection		EN 60529
RFID		ISO/IEC 18000-63
Ambient conditions		
Ambient temperature		-40 ... 85 °C (-40 ... 185 °F)
Storage temperature		-50 ... 250 °C (-58 ... 482 °F)
Mechanical specifications		
Degree of protection		IP69K
Material		
Housing		Stainless steel
Installation		
In metal		yes
Mass		25.4 g
Dimensions		
Height		8.5 mm
Height tolerance		± 0.1 mm
Diameter		28.3 mm
Diameter tolerance		± 0.1 mm
Construction type		Cylindrical
Note		observe mounting instructions

Release date: 2024-06-14 Date of issue: 2024-06-14 Filename: 70119949_eng.pdf