

- Battery operated
- Data transfer via LoRaWAN
- Bluetooth interface for commissioning, parameterization and diagnostics

Wireless ultrasonic sensor with LoRaWAN interface, especially for fill level measurement in tanks and silos, sensing range 150 ... 2500 mm, resolution 1 mm



The wireless ultrasonic sensor can be used for remote monitoring of fill level. The fill level, but also other parameters such as geo data and sensor status data, are measured or recorded in configurable time intervals and transmitted to a counterpart in the LoRa network from where they are available for pure display or further processing. The sensor is parameterised via a Bluetooth interface using a mobile device (smartphone or tablet) and the WILSEN app belonging to the sensor.

[illegible]

Technical Data

Main sensor		
Detection type		ultrasonic
Sensing range		150 ... 2500 mm
Dead band		0 ... 150 mm
Resolution		10 mm
Accuracy		± 3 % of full-scale value over the entire temperature range
Measurement frequency		5 min ... 24 h
Integrated sensor technology		
GPS sensor		for geo-positioning
Acquisition interval		30 min ... 24 h
Temperature sensor		
Resolution		0.5 °C
Accuracy		± 2 °C
Electrical specifications		
Power supply		high capacity lithium battery 3.6 V , 13000 mAh battery lifetime approx. 5 years under Central European environmental conditions (- 25 °C + 70 °C) 3 measurements/day, 1 geolocation/day with 1 wireless transmission/day with sufficient network coverage.
Interface 1		
Interface type		Bluetooth 5.0 LE
Transmitter radiated power		+ 8 dBm
Frequency range		2402 ... 2480 MHz
Interface 2		
Interface type		LoRaWAN
Specification		LoRaWAN interface specification V1.0.3
Device type		LoRaWAN class A device
Transmitter frequency		868 MHz
Transmitter radiated power		+ 8 dBm
Frequency range		863 ... 870 MHz (Europe)
Transfer frequency		5 min ... 24 h
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 301 489-1 V2.2.0:2017 EN 301 489-3 V2.1.1:2019 EN 301 489-17 V3.2.0:2017 EN 301 489-19 V2.1.0:2017
Radio and telecommunication terminal equipment		
Directive 2014/53/EU		EN 300 220-2 V3.1.1:2017 EN 300 328 V2.1.1:2016 EN 303 413 V1.1.1:2017
RoHS		
Directive 2011/65/EU (RoHS)		EN 50581:2012-09
Conformity		
Mech. capacity		EN IEC 60947-5-2:2020 IEC 60947-5-2:2019
Shock resistance		EN IEC 60947-5-2:2020 IEC 60947-5-2:2019
Vibration resistance		EN IEC 60947-5-2:2020 IEC 60947-5-2:2019
Climatic conditions		EN IEC 60947-5-2:2020 IEC 60947-5-2:2019
Ambient conditions		
Ambient temperature		-25 ... 70 °C (-13 ... 158 °F)
Storage temperature		-40 ... 85 °C (-40 ... 185 °F)
Mechanical specifications		
Degree of protection		IP66 / IP67


Release date: 2023-06-27 Date of issue: 2023-06-27 Filename: 70124842_eng.pdf

Technical Data

Material	
Housing	PC (UL94-V0)
Transducer	PTFE coated housing: PBT
Mass	600 g
Factory settings	
Beam width	wide
Transfer frequency	24 h
Measurement frequency	24 h

Characteristic Curve

Characteristic response curve

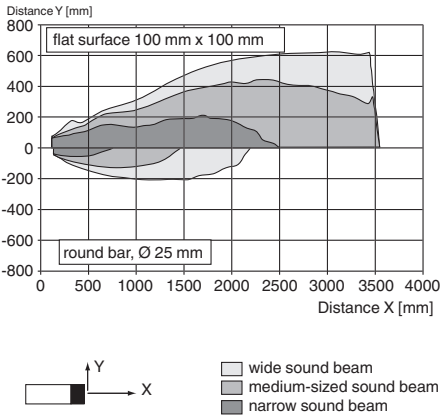

Additional Information

Further Documentation
For commissioning, parameterization and usage of the sensor, there are also a brief commissioning instructions, a manual and further technical information for download from the product page at www.pepperl-fuchs.com.

Release date: 2023-06-27 Date of issue: 2023-06-27 Filename: 70124842_eng.pdf