




Y connection cable V19S-0,15M-PUR/V15-T-V19-VOS

- For use with series VOS cameras
- Quick and easy connection of the LED flash lightings due to internal pre-wiring
- Transmits control signals to flash controller for intelligent lighting control
- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching

Y connection cable M12 socket straight A-coded 12-pin to M12 plug 12-pin / M12 socket 5-pin straight A-coded, PUR cable black, shielded



Dimensions

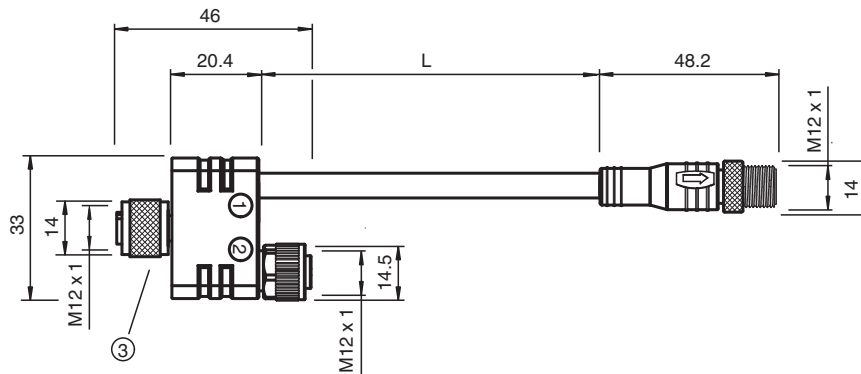

Technical Data

General specifications		
Customization		For use with series VOS cameras
Connector 1		
Connection		plug
Construction type		M12
Style		straight
Locking		screw connection
Number of pins		12
Coding		A-coded
Connector 2		
Connection		socket
Construction type		M12
Style		straight
Locking		screw connection
Number of pins		5
Coding		A-coded

Release date: 2023-04-13 Date of issue: 2023-04-13 Filename: 70132289_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Connector 3		
Connection		socket
Construction type		M12
Style		straight
Locking		screw connection
Number of pins		12
Coding		A-coded
Electrical specifications		
Operating voltage	U _B	max. 30 V AC/DC
Operating current	I _B	max. 1.5 A
Conformity		
Degree of protection		EN 60529
Plug connection		connector M12 x 1 : IEC 61076-2-101
Ambient conditions		
Ambient temperature		
Plug connector		-40 ... 85 °C (-40 ... 185 °F)
Cable, fixed		-40 ... 85 °C (-40 ... 185 °F)
Cable, flexing		-25 ... 85 °C (-13 ... 185 °F)
Pollution degree		3
Mechanical specifications		
Plug connector		
Tightening torque		0.4 ... 0.8 Nm
Loosening protection		available
Tool installation		straight knurling
Mating cycles		min. 500
Shielding		shield connected to screw connection
Degree of protection		IP67
Cable		according to IEC/EN 60228 (DIN VDE 0295) class 5
Sheath diameter		6.5 mm
Sheath stripping force		max. 30 N / 500 mm
Sheath color		black (similar to RAL 9005)
Number of cores		12
Core cross section		0.14 mm ²
Shield		aluminum-lined polyester foil Tinned copper braiding, 70 % coverage
Length	L	0.15 m
Material		
Connector 1		
Screw connection		brass, nickel-plated
Body		TPU, black
Contact surface		Au
Flammability		V-0
Connector 2		
Screw connection		Zinc diecast, nickel-plated
Body		TPU, black
Contact surface		Au
Flammability		V-0
Connector 3		
Screw connection		brass, nickel-plated
Body		TPU, black
Contact surface		Au
Flammability		V-0
Cable		

Release date: 2023-04-13 Date of issue: 2023-04-13 Filename: 70132289_eng.pdf

Technical Data

Sheathing	PUR
Flammability	FT2

Connection Assignment

