

Inductive sensor


NBN2,5-8GM35-E1L-Y



- 2.5 mm non-flush
- Magnetic field resistant



Dimensions

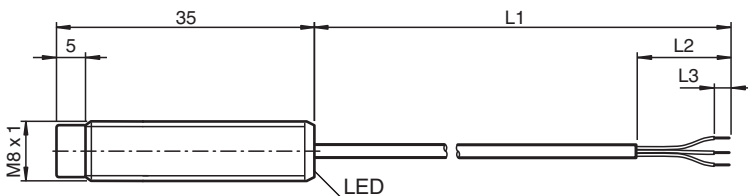

Technical Data

General specifications		
Switching function		Normally closed (NC)
Output type		NPN
Rated operating distance	s _n	2.5 mm
Installation		non-flush
Output polarity		DC
Assured operating distance	s _a	0 ... 2.03 mm
Reduction factor r _{Al}		0.45
Reduction factor r _{Cu}		0.35
Reduction factor r ₃₀₄		0.75
Output type		3-wire
Nominal ratings		
Nominal voltage	U _o	5 V
Operating voltage	U _B	4.75 ... 5.25 V
Switching frequency	f	0 ... 800 Hz
Reverse polarity protection		no
Short-circuit protection		no
Voltage drop	U _d	≤ 1 V
Operating current	I _L	0 ... 40 mA
Off-state current	I _r	≤ 50 μA
No-load supply current	I ₀	≤ 10 mA
Switching state indicator		LED, red
Compliance with standards and directives		
Standard conformity		
Standards		EN IEC 60947-5-2

Release date: 2024-05-27 Date of issue: 2024-05-29 Filename: 70134664_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

Technical Data

Ambient conditions		
Ambient temperature		10 ... 80 °C (50 ... 176 °F)
Mechanical specifications		
Connection type		cable
Housing material		brass, nickel-plated
Sensing face		LCP, black
Degree of protection		IP65
Cable		
Cable diameter		3.5 mm ± 0.1 mm
Material		PVC
Color		black
Core cross section		0.14 mm²
Length	L	L1 = 2 m ± 25 mm L2 = 50 mm ± 2 mm L3 = 5 mm stripped and tinned
Dimensions		
Length		30 mm
Diameter		8 mm

Connection



Release date: 2024-05-27 Date of issue: 2024-05-29 Filename: 70134664_eng.pdf