

Bulk Raw Cable

CBL-PVC-BU-02X014-300M




- Suitable for NAMUR technology
- Suitable for routing intrinsically safe circuits in accordance with DIN EN 60079-14:2014

Cable, PVC/PVC, 2-core blue



Dimensions

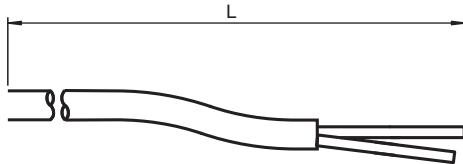

Technical Data

Electrical specifications

Operating voltage	U_B	max. 300 V AC/DC
Resistance per unit length	R'	max. 0.159 Ω /m
Capacitance per unit length	C'	110 nF/km
Inductance per unit length	L'	1.32 mH/km

Ambient conditions

Ambient temperature		
Cable, fixed installation		-25 ... 100 °C (-13 ... 212 °F)
Cable, flexing		0 ... 70 °C (32 ... 158 °F)
Pollution degree		3

Mechanical specifications

Cable		according to IEC/EN 60228 (DIN VDE 0295) class 6
Sheath diameter		2.6 mm $\pm$ 0.2 mm
Bending radius		> 10 x cable diameter, fixed installation > 10 x cable diameter, movable installation
Sheath stripping force		max. 3.5 N / 50 mm
Sheath color		blue (similar to RAL 5015)
Number of cores		2
Core cross section		0.14 mm ²
Cores color		Core 1: brown Core 2: blue
Core construction		18 x 0.1 mm $\varnothing$
Length	L	see type code V*-[length]M-*
Mass		10.1 kg/km
Cable code		Li YY 2 x 0,34

Release date: 2025-02-14 Date of issue: 2025-02-14 Filename: 70137096_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

Technical Data

Mass	2866 g	
Material		
Cable		
Sheathing		PVC
Cores	bare copper (Cu)	
Core insulation		PVC

Connection



Release date: 2025-02-14 Date of issue: 2025-02-14 Filename: 70137096_eng.pdf