


Junction Box Ex e, Stainless Steel

SR.TJE.11.14.09.B.0-S0001

- 136 x 110 x 86 mm
- Stainless Steel AISI 316L
- Installation in Zone 1, Zone 2, Zone 21 and Zone 22
- Bottom face cable gland polyamide, 3x M20; left side cable gland polyamide, 1x M20; right side cable gland polyamide, 1x M20



Dimensions

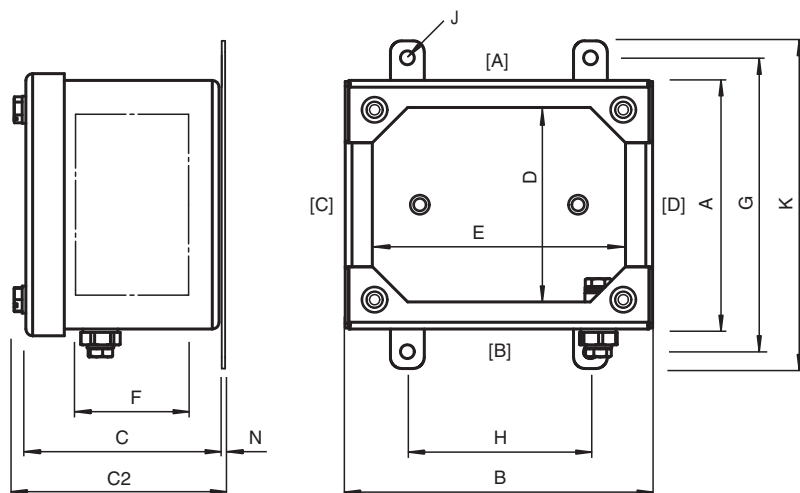

Dimension values see data table.

Image and drawing are generic for this device type and may deviate from the specific variant.

Technical Data

Electrical specifications

Operating voltage 352 V AC / DC max. for ATEX / IECEx

Operating current see instruction manuals

Mechanical specifications

Enclosure cover fully detachable

Cover fixing stainless steel A4 (V4A) hexagonal head screws

Screws M6

Number 4

Tightening torque 3 Nm - 3.5 Nm

Cover seal silicone

Degree of protection IP66

Cable entry thru-holes direct through body

Cable entry face B

M20 quantity 3

M20 series Cable Glands, Plastic

Technical Data

M20 type	CG.PEDS1.M20.*
M20 clamping range	6 ... 12 mm
Cable entry face C	
M20 quantity	1
M20 series	Cable Glands, Plastic
M20 type	CG.PEDS1.M20.*
M20 clamping range	6 ... 12 mm
Cable entry face D	
M20 quantity	1
M20 series	Cable Glands, Plastic
M20 type	CG.PEDS1.M20.*
M20 clamping range	6 ... 12 mm
Terminal assembly	
Rail orientation	horizontal
Number of vertical rails	
Number of horizontal rails	1
Terminal type	12 x MUT 4 2 x MUT 4 PE
Terminal capacity	4 mm ²
Material	
Enclosure	1.5 mm AISI 316L, (1.4404) stainless steel
Finish	brushed
Mass	approx. 1 kg
Dimensions	
External dimension (A)	110 mm
External dimension (B)	136 mm
External dimension (C)	87 mm
External dimension with screws (C2)	92 mm
Internal dimension (D)	112 mm
Internal dimension (E)	86 mm
Internal dimension (F)	66 mm
Mounting holes distance (G)	130 mm
Mounting holes distance (H)	81 mm
Mounting holes diameter (J)	6 mm
Thickness of mounting brackets (N)	8.5 mm
Maximum external dimension (K)	145 mm
Mounting	4 screws
Grounding	M6 internal/external brass nickel-plated grounding bolt
Ambient conditions	
Ambient temperature	-40 ... 60 °C (-40 ... 140 °F)
Data for application in connection with hazardous areas	
EU-type examination certificate	CML 20 ATEX 3156X
Marking	Ex II 2 GD Ex eb IIC T* Gb, Ex tb IIIC T** Db T6/T80 °C @ Ta +40 °C T4/T130 °C @ Ta +60 °C
International approvals	
IECEx approval	IECEx CML 20.0094X
UKCA approval	CML 21 UKEX 3892X
Further approvals	further on request
Conformity	
Degree of protection	EN60529
CE marking	0102
General information	

Release date: 2024-11-04 Date of issue: 2024-11-04 Filename: 70142757_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

Technical Data

Ordering information		This device will be delivered completely configured and assembled ready for use. For configuration details please contact Customer Service.
Supplementary information		EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com .
Accessories		
Optional accessories		M6 internal/external stainless steel grounding bolt

Release date: 2024-11-04 Date of issue: 2024-11-04 Filename: 70142757_eng.pdf