


Inductive slot sensor

SJ15-A2-V1

- 15 mm slot width
- 4-wire DC



Dimensions

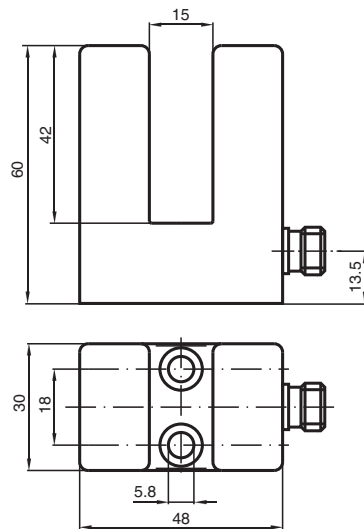

Technical Data

General specifications		
Switching function		complementary
Output type		PNP
Slot width		15 mm
Depth of immersion (lateral)		17 ... 20 mm
Output polarity		DC
Output type		4-wire
Nominal ratings		
Nominal voltage	U _o	8 V
Operating voltage	U _B	10 ... 30 V DC
Switching frequency	f	0 ... 500 Hz
Reverse polarity protection		reverse polarity protected
Short-circuit protection		pulsing
Voltage drop	U _d	≤ 3 V
Operating current	I _L	0 ... 200 mA
No-load supply current	I ₀	≤ 20 mA
Functional safety related parameters		
MTTF _d		1136 a
Mission Time (T _M)		20 a
Diagnostic Coverage (DC)		0 %
Compliance with standards and directives		
Standard conformity		

Release date: 2024-05-27 Date of issue: 2024-05-28 Filename: 087232_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**


Technical Data

Standards	EN IEC 60947-5-2
Approvals and certificates	
UL approval	cULus Listed, General Purpose
CCC approval	CCC approval / marking not required for products rated ≤36 V
Ambient conditions	
Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
Mechanical specifications	
Connection type	Connector plug
Housing material	PBT
Degree of protection	IP67
Connector	
Threading	M12 x 1
Number of pins	4
Mass	105 g
Dimensions	
Height	60 mm
Width	30 mm
Length	48 mm

Connection



Connection Assignment



Wire colors in accordance with EN 60947-5-2

1	BN	(brown)
2	WH	(white)
3	BU	(blue)
4	BK	(black)

Release date: 2024-05-27 Date of issue: 2024-05-28 Filename: 087232_eng.pdf