




Thru-beam sensor emitter

MD17/143



- Emitter
- Compact, versatile housing
- 360° high visibility LEDs
- M8-plug connection

Thru-beam sensor transmitter, small design, infrared light, 20 m range, M8 plug




Function

The ML17 sensor family offers diverse connection and installation options, which means that it can adapt to the most varied automation tasks. In addition to the usual fitting method using M4 screws, these sensors can also be installed by means of M18 threaded insert. All devices are equipped with a green Power On display and a yellow function display. These displays are arranged in such a way that they are clearly visible from different directions.

Application

- Presence monitoring
- Target sensors
- Congestion monitoring
- Track loading
- Completeness checks

Dimensions

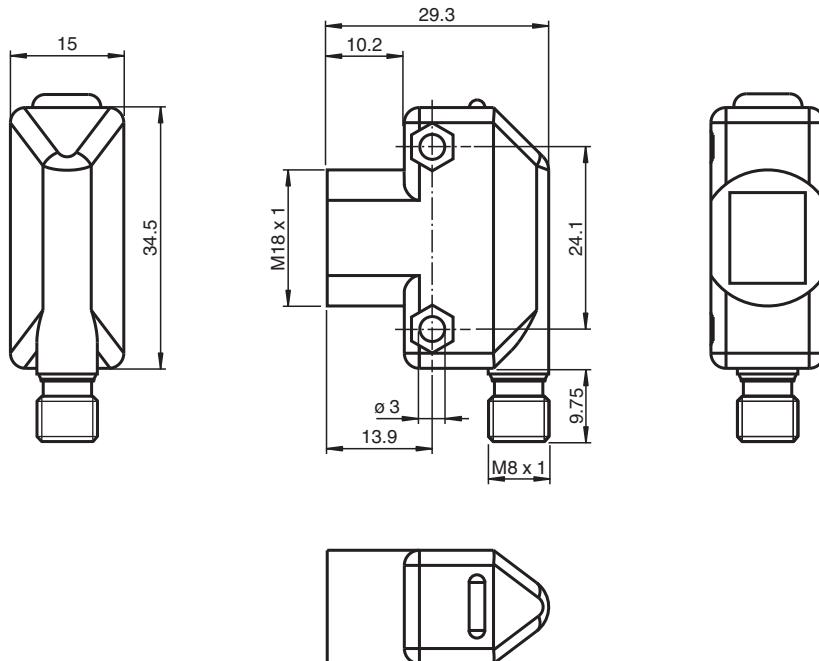

Technical Data

Release date: 2022-08-03 Date of issue: 2022-08-03 Filename: 908709_eng.pdf

System components		
Emitter	MD17/143	
Receiver	MV17/136/143	
General specifications		
Effective detection range	0 ... 15 m	
Threshold detection range	20 m	
Reference target	receiver	
Light source	IRED	
Light type	Infrared LED	
Ambient light limit	≤ 10000 Lux	
Indicators/operating means		
Operation indicator	LED green	
Electrical specifications		
Operating voltage	U_B	10 ... 30 V DC , class 2
Ripple		max. 10 %
No-load supply current	I_0	< 25 mA
Operating current	I_B	
Time delay before availability	t_v	≤ 200 ms
Conformity		
Product standard	EN 60947-5-2 IEC 60947-5-2	
Approvals and certificates		
CE conformity	CE	
EAC conformity	TR CU 020/2011	

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 PEPPERL+FUCHS

Technical Data

UL approval	cULus
CCC approval	CCC approval / marking not required for products rated ≤ 36 V
Ambient conditions	
Ambient temperature	-20 ... 55 °C (-4 ... 131 °F)
Storage temperature	-20 ... 70 °C (-4 ... 158 °F)
Mechanical specifications	
Housing width	15 mm
Housing height	34.5 mm
Degree of protection	IP67
Connection	M8 x 1 connector, 4-pin
Material	
Housing	ABS
Optical face	Acrylic
Mass	approx. 9 g

Connection

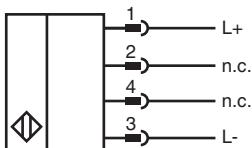


Connection Assignment



Wire colors in accordance with EN 60947-5-2


1	BN	(brown)
2	WH	(white)
3	BU	(blue)
4	BK	(black)

Indication

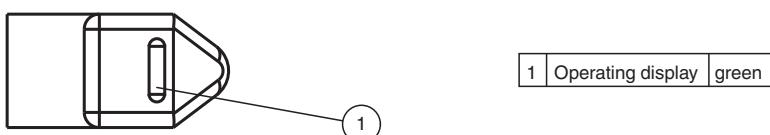


Characteristic Curve

Characteristic response curve

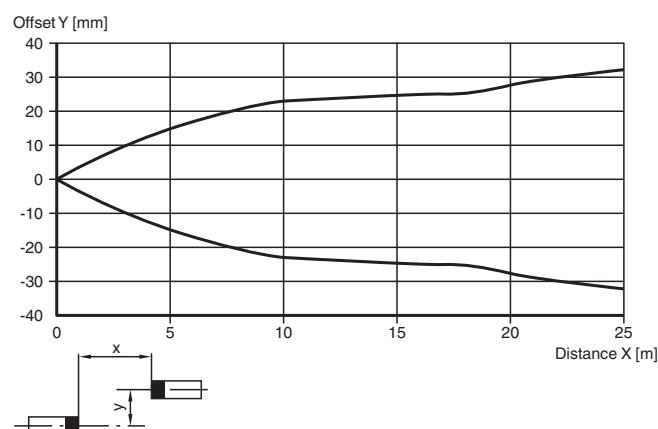

Relative received light strength

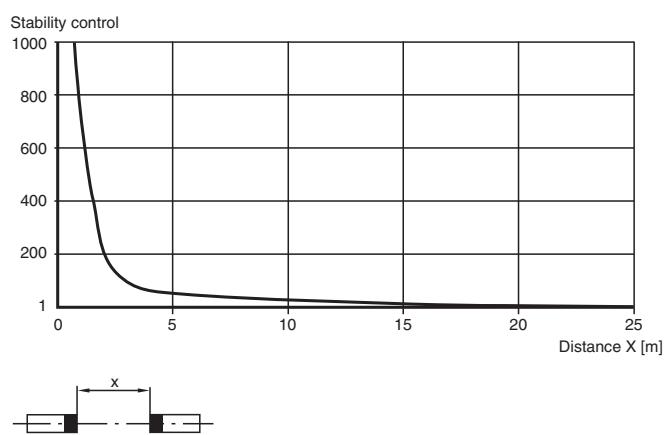

Matching System Components



MV17/136/143

Thru-beam sensor receiver, small design, infrared, light-on/dark-on switching, push-pull output, M8 plug

Accessories

Release date: 2022-08-03 Date of issue: 2022-08-03 Filename: 908709_eng.pdf

	OMH-ML17	Mounting bracket
	OMH-ML17-1	Mounting bracket
	V31-GM-BK2M-PUR-U	Female cordset single-ended M8 straight A-coded, 4-pin, PUR cable black, UL approved, drag chain suitable, torsion resistant
	V31-WM-BK2M-PUR-U	Female cordset single-ended M8 angled A-coded, 4-pin, PUR cable black, UL approved, drag chain suitable, torsion resistant
	V31-GM-BK5M-PUR-U	Female cordset single-ended M8 straight A-coded, 4-pin, PUR cable black, UL approved, drag chain suitable, torsion resistant
	V31-WM-BK5M-PUR-U	Female cordset single-ended M8 angled A-coded, 4-pin, PUR cable black, UL approved, drag chain suitable, torsion resistant

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.comUSA: +1 330 486 0001
fa-info@us.pepperl-fuchs.comGermany: +49 621 776 1111
fa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS