




Female connector, field-attachable V94-G

- Screw terminal connection
- Internal connector thread
- Gold plated contacts

Female connector, 7/8" - 16 UN2B, 4-pin, field attachable



Dimensions

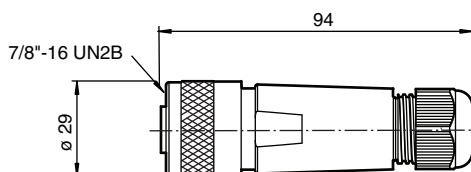

Technical Data

General specifications

Number of pins	4
Connection 1	socket
Construction type 1	straight
Threading 1	7/8 inch

Electrical specifications

Operating voltage	U_B	max. 600 V
Operating current	I_B	max. 15 A
Volume resistance		< 5 mΩ

Approvals and certificates

UL approval	cULus Listed, General Purpose
-------------	-------------------------------

Ambient conditions

Ambient temperature	-40 ... 90 °C (-40 ... 194 °F)
---------------------	--------------------------------

Mechanical specifications

Degree of protection	IP67
Connection	1 x 7/8 inch - 16 UN2B ; Socket, straight , screw terminal for 14 - 22 AWG

Release date: 2023-04-04 Date of issue: 2023-04-04 Filename: 912905_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Material		
Contacts		gold plated Cu alloy
Body		Polyamide (PA)
Slotted nut		black anodized aluminum
Sleeve connector		yellow PVC
Cable		
Sheath diameter		5 ... 13 mm

Connection



Release date: 2023-04-04 Date of issue: 2023-04-04 Filename: 912905_eng.pdf