

Mounting aid


CM-12



- Cushioned Mounting Bracket
- For use with 12 mm diameter sensors
- Maximum overtravel: 10.4 mm

Cushioned mounting bracket

Dimensions

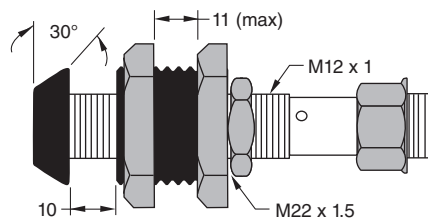

Technical Data

General specifications

Inside diameter	12 mm
-----------------	-------

Mechanical specifications

Material	Sleeves: anodized aluminum Jam nuts: nickel-plated metal End cap: fiberglass reinforced nylon
----------	---

Release date: 2020-06-29 Date of issue: 2020-06-29 Filename: 091458_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**

Function

The cushioned mounting bracket provides protection against accidental target contact for embeddable standard inductive sensors.