



## Model Number


**V94-G-SE**

Male connector, 7/8" - 16 UN2A, 4-pin, field attachable

## Features

- Screw terminal connection
- External connector thread
- Gold plated contacts

## Dimensions

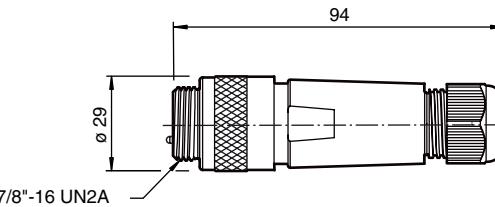

## Technical data

### General specifications

Number of pins	4
----------------	---

### Electrical specifications

Operating voltage	$U_B$	max. 600 V
Operating current	$I_B$	max. 15 A

### Ambient conditions

Ambient temperature	-40 ... 90 °C (-40 ... 194 °F)
---------------------	--------------------------------

### Mechanical specifications

Degree of protection	IP67
Connection	1 x 7/8 inch-16 UN - 2A ; Connector, straight screw terminal for 14 - 22 AWG
Material	
Contacts	gold plated Cu alloy
Body	Polyamide (PA)
Slotted nut	nickel-plated brass
Sleeve connector	yellow PVC
Cable	
Sheath diameter	5 ... 13 mm
Note	Male connector thread Length: 3.5 mm Voltage rating is 600V or the rating of cable, whichever is less

### Approvals and certificates

UL approval	cULus Listed, General Purpose
-------------	-------------------------------

## Electrical connection

