






Illustration may differ



## Ordering information

| Type              | part no. |
|-------------------|----------|
| AFM60A-TDAM262144 | 1065646  |

Other models and accessories → [www.sick.com/AFS\\_AFM60\\_SSI](http://www.sick.com/AFS_AFM60_SSI)

## Detailed technical data

### Safety-related parameters

|                                                          |                                          |
|----------------------------------------------------------|------------------------------------------|
| <b>MTTF<sub>D</sub> (mean time to dangerous failure)</b> | 250 years (EN ISO 13849-1) <sup>1)</sup> |
|----------------------------------------------------------|------------------------------------------|

<sup>1)</sup> This product is a standard product and does not constitute a safety component as defined in the Machinery Directive. Calculation based on nominal load of components, average ambient temperature 40 °C, frequency of use 8760 h/a. All electronic failures are considered hazardous. For more information, see document no. 8015532.

### Performance

|                                                                                 |                                   |
|---------------------------------------------------------------------------------|-----------------------------------|
| <b>Number of steps per revolution (max. resolution)</b>                         | 262,144 (18 bit)                  |
| <b>Number of revolutions</b>                                                    | 4,096 (12 bit)                    |
| <b>Max. resolution (number of steps per revolution x number of revolutions)</b> | 18 bit x 12 bit (262,144 x 4,096) |
| <b>Error limits G</b>                                                           | 0.03° <sup>1)</sup>               |
| <b>Repeatability standard deviation <math>\sigma_r</math></b>                   | 0.002° <sup>2)</sup>              |

<sup>1)</sup> In accordance with DIN ISO 1319-1, position of the upper and lower error limit depends on the installation situation, specified value refers to a symmetrical position, i.e. deviation in upper and lower direction is the same.

<sup>2)</sup> In accordance with DIN ISO 55350-13; 68.3% of the measured values are inside the specified area.

### Interfaces

|                                           |                                                    |
|-------------------------------------------|----------------------------------------------------|
| <b>Communication interface</b>            | SSI                                                |
| <b>Initialization time</b>                | 50 ms <sup>1)</sup>                                |
| <b>Position forming time</b>              | < 1 µs                                             |
| <b>Code type</b>                          | Gray                                               |
| <b>Code sequence parameter adjustable</b> | CW/CCW (V/R) parameter adjustable                  |
| <b>Clock frequency</b>                    | ≤ 2 MHz <sup>2)</sup>                              |
| <b>Set (electronic adjustment)</b>        | H-active (L = 0 - 3 V, H = 4,0 - U <sub>s</sub> V) |

<sup>1)</sup> Valid positional data can be read once this time has elapsed.

<sup>2)</sup> Minimum, LOW level (Clock +): 250 ns.

|                                                |                                          |
|------------------------------------------------|------------------------------------------|
| <b>CW/CCW (counting sequence when turning)</b> | L-active (L = 0 - 1,5 V, H = 2,0 - Us V) |
|------------------------------------------------|------------------------------------------|

<sup>1)</sup> Valid positional data can be read once this time has elapsed.

<sup>2)</sup> Minimum, LOW level (Clock +): 250 ns.

## Electronics

|                                    |                                             |
|------------------------------------|---------------------------------------------|
| <b>Connection type</b>             | Cable, 8-wire, universal, 5 m <sup>1)</sup> |
| <b>Supply voltage</b>              | 4.5 ... 32 V                                |
| <b>Power consumption</b>           | ≤ 0.7 W (without load)                      |
| <b>Reverse polarity protection</b> | ✓                                           |

<sup>1)</sup> The universal cable connection is positioned so that it is possible to lay it without bends in a radial or axial direction.

## Mechanics

|                                       |                                         |
|---------------------------------------|-----------------------------------------|
| <b>Mechanical design</b>              | Through hollow shaft                    |
| <b>Shaft diameter</b>                 | 10 mm                                   |
| <b>Characteristics of the shaft</b>   | Front clamp                             |
| <b>Weight</b>                         | 0.2 kg <sup>1)</sup>                    |
| <b>Shaft material</b>                 | Stainless steel                         |
| <b>Flange material</b>                | Aluminum                                |
| <b>Housing material</b>               | Aluminum die cast                       |
| <b>Start up torque</b>                | < 0.8 Ncm (+20 °C)                      |
| <b>Operating torque</b>               | < 0.6 Ncm (+20 °C)                      |
| <b>Permissible movement static</b>    | ± 0.3 mm (radial)<br>± 0.5 mm (axial)   |
| <b>Permissible movement dynamic</b>   | ± 0.05 mm (radial)<br>± 0.1 mm (axial)  |
| <b>Operating speed</b>                | ≤ 9,000 min <sup>-1</sup> <sup>2)</sup> |
| <b>Moment of inertia of the rotor</b> | 40 gcm <sup>2</sup>                     |
| <b>Bearing lifetime</b>               | 3.0 x 10 <sup>9</sup> revolutions       |
| <b>Angular acceleration</b>           | ≤ 500,000 rad/s <sup>2</sup>            |

<sup>1)</sup> Based on devices with male connector.

<sup>2)</sup> Allow for self-heating of 3.3 K per 1,000 rpm when designing the operating temperature range.

## Ambient data

|                                      |                                                                              |
|--------------------------------------|------------------------------------------------------------------------------|
| <b>EMC</b>                           | According to EN 61000-6-2 and EN 61000-6-3 <sup>1)</sup>                     |
| <b>Enclosure rating</b>              | IP65, shaft side (IEC 60529)<br>IP67, housing side (IEC 60529) <sup>2)</sup> |
| <b>Permissible relative humidity</b> | 90 % (Condensation not permitted)                                            |
| <b>Operating temperature range</b>   | -40 °C ... +100 °C <sup>3)</sup>                                             |
| <b>Storage temperature range</b>     | -40 °C ... +100 °C, without package                                          |
| <b>Resistance to shocks</b>          | 60 g, 6 ms (EN 60068-2-27)                                                   |
| <b>Resistance to vibration</b>       | 20 g, 10 Hz ... 2,000 Hz (EN 60068-2-6)                                      |

<sup>1)</sup> EMC according to the standards quoted is achieved if shielded cables are used.

<sup>2)</sup> For devices with male connector: with mounted mating connector.


<sup>3)</sup> Stationary position of the cable.





| PIN | Wire colors (cable connection) | Signal | Explanation                                                                       |
|-----|--------------------------------|--------|-----------------------------------------------------------------------------------|
| -   | -                              | Screen | Screen connected to housing on encoder side. Connected to ground on control side. |

Diagrams

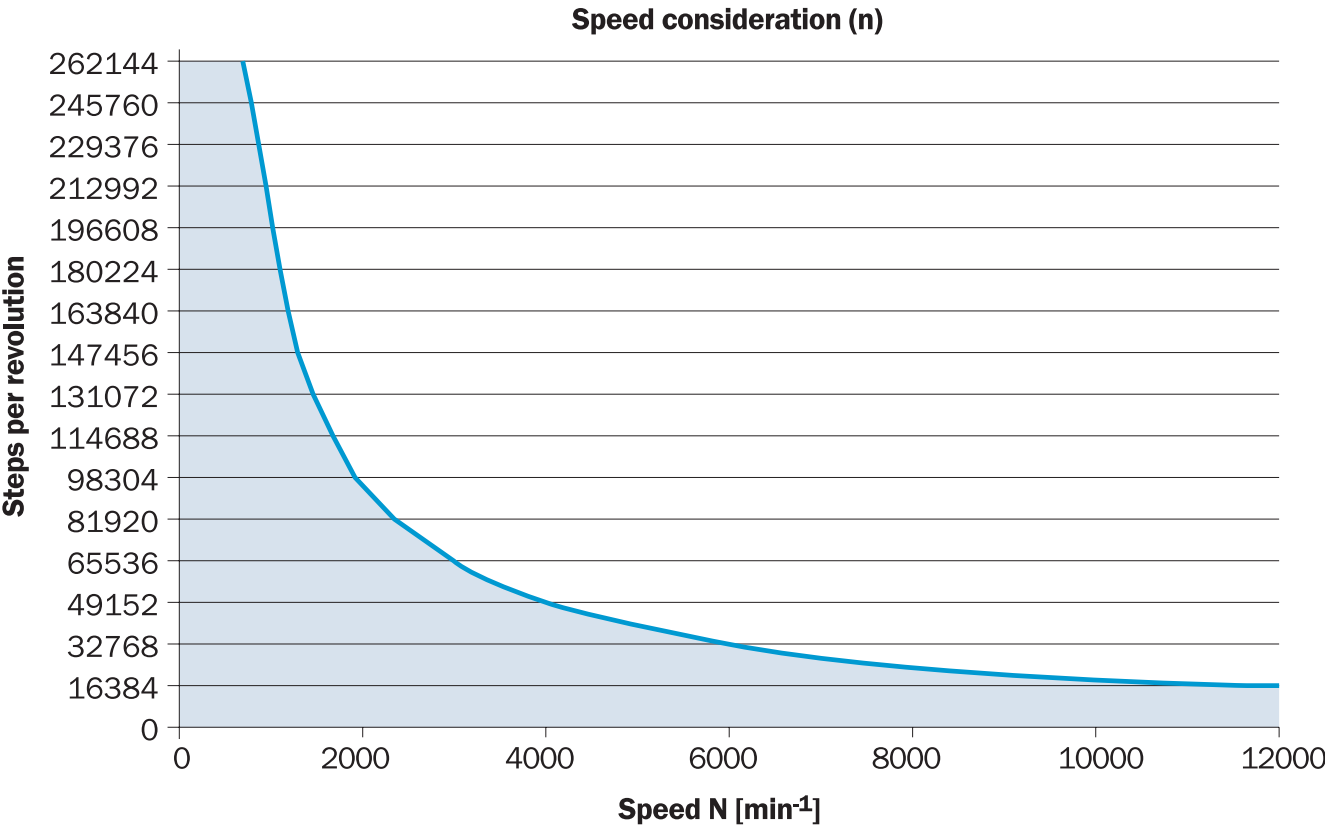

The maximum speed is also dependent on the shaft type.



