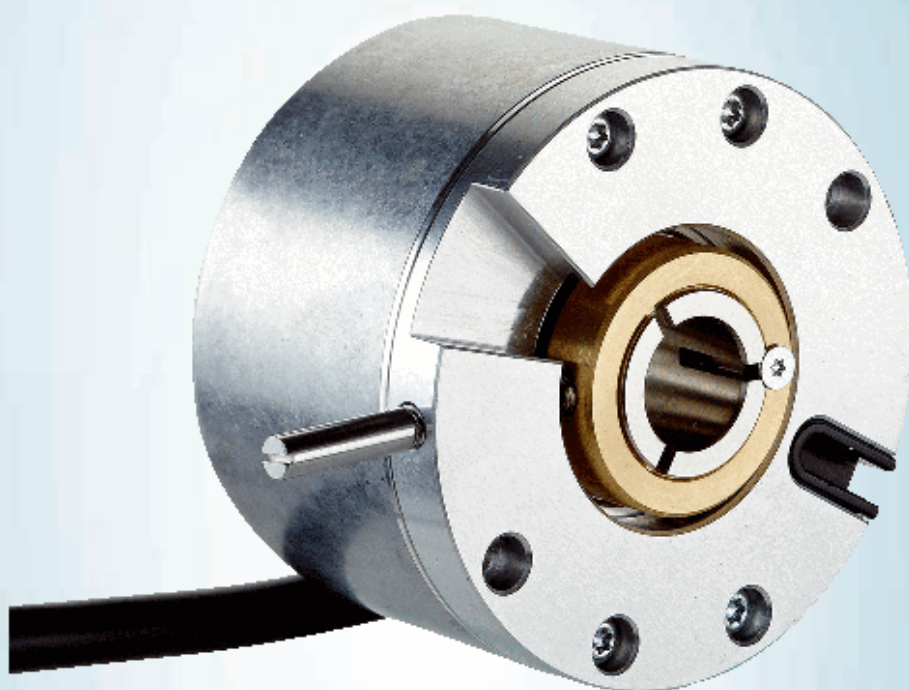




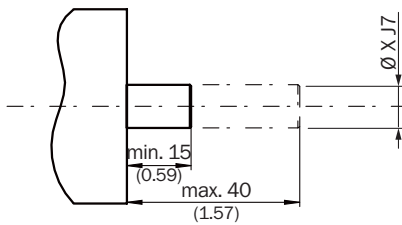
DBS60E-BBFPC1024

DBS60

INCREMENTAL ENCODERS

SICK
Sensor Intelligence.


Type	Blind hollow shaft	Shaft diameter XF7
DBS60x-BA	xxxxxxxDBS60x-B1	6 mm
DBS60x-BB	xxxxxxxDBS60x-B2	8 mm
DBS60x-BC	xxxxxxxDBS60x-B3	3/8"
DBS60x-BD	xxxxxxxDBS60x-B4	10 mm
DBS60x-BE	xxxxxxxDBS60x-B5	12 mm
DBS60x-BF	xxxxxxxDBS60x-B6	1/2"
DBS60x-BG	xxxxxxxDBS60x-B7	14 mm
DBS60x-BH	xxxxxxxDBS60x-B8	15 mm
DBS60x-BJ	xxxxxxx	5/8"

[illegible]

customer side

[illegible]

PIN assignment

[illegible]

[illegible]

The graph shows the relationship between angular velocity ω and speed N . The x-axis represents speed N in min^{-1} , ranging from 0 to 9000. The y-axis represents angular velocity ω in min^{-1} , ranging from 0 to 10240. The curve starts at approximately $(1500, 10240)$ and decreases as speed increases, reaching approximately $(9000, 2048)$.

Diagrams Signal outputs for electrical interfaces TTL and HTL



Cw with view on the encoder shaft in direction "A", compare dimensional drawing.

Supply voltage	Output
4,5 V ... 5,5 V	TTL
10 V ... 30 V	TTL
10 V ... 27 V	HTL
4,5 V ... 30 V	TTL/HTL universal
4,5 V ... 30 V	TTL

[illegible][illegible]

	Brief description	Type	part no.
	• Permitted cross-section: ≤ 0.25 mm² • Note: Drag chain use • Application: Drag chain operation	YF2AA8-020S01M-KA18	
	• Connection type head A: Female connector, M12, 8-pin, straight, A-coded • Connection type head B: Male connector, M12, 8-pin, straight, A-coded • Cable: 2 m, 8-wire, PUR, halogen-free • Description: Shielded • Permitted cross-section: ≤ 0.25 mm² • Note: Drag chain use • Application: Drag chain operation		2099207
	• Connection type head A: Female connector, M12, 8-pin, straight, A-coded • Connection type head B: Male connector, M12, 8-pin, straight, A-coded • Cable: 5 m, 8-wire, PUR, halogen-free • Description: Shielded • Permitted cross-section: ≤ 0.25 mm² • Note: Drag chain use • Application: Drag chain operation	YF2AA8-050S01M-KA18	2099209
	• Connection type head A: Female connector, M12, 8-pin, straight, A-coded • Connection type head B: Male connector, M12, 8-pin, straight, A-coded • Cable: 10 m, 8-wire, PUR, halogen-free • Description: Shielded • Permitted cross-section: ≤ 0.25 mm² • Note: Drag chain use • Application: Drag chain operation	YF2AA8-100S01M-KA18	2099210

[illegible][illegible]

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

[illegible]

WORLDWIDE PRESENCE:

Contacts and other locations – www.sick.com