



DT35S-B15551

Dx35

TIME-OF-FLIGHT SENSORS

SICK
Sensor Intelligence.



Ordering information

Type	part no.
DT35S-B15551	1122103

Other models and accessories → www.sick.com/Dx35



Detailed technical data

Features

Safety-related measuring range	50 mm ... 8,500 mm, 90% remission factor ¹⁾ 50 mm ... 4,500 mm, 20% remission 50 mm ... 3,000 mm, 10% remission 50 mm ... 2,000 mm, 6% remission factor
Target	Natural objects
Resolution	1 mm
Systematic error	< 25 mm ²⁾
Statistical error	< 25 mm ^{2) 3)}
Response time	15 ms ... 50 ms ^{4) 5)}
Light source	Laser, red ⁶⁾ visible red light
Type of light	Visible red light
Laser class	1 (IEC 60825-1:2014, EN 60825-1:2014)
Typ. light spot size (distance)	15 mm x 15 mm (at 2 m)
Additional function	Adjustable speed: slow and medium Teach-in of analog output and invertible analog output Configurable Q ₂ output: current output / digital output Switching mode: Distance to Object (DtO) / switching window / object between sensor and background (ObSB) Teach-in of digital output Multifunctional input: laser off / deactivated
Safety-related parameters	

¹⁾ With the Slow speed setting. No objects will be detected from the measurement origin to a distance of 50 mm.

²⁾ 6% ... 90% remission factor.

³⁾ Corresponds to 4.4 σ .

⁴⁾ Depending on the configured speed and interface.

⁵⁾ Lateral entry of the object into the measuring range.

⁶⁾ Wavelength: 658 nm; max. output: 250 mW; pulse duration: 4 ns; duty cycle: 1/500.

⁷⁾ 10 years at 50 °C ambient temperature.

Category	B (EN ISO 13849-1:2015)
Performance level	PL b (EN ISO 13849-1:2015)
Performance class SRS/SRSS	B (IEC TS 62998-1:2019)
Max. cumulative downtime per year	< 5 min (IEC TS 62998-1)
Conformities	EN ISO 13849-1:2015, IEC TS 62998-1:2019, EN ISO 13482:2014, ANSI/ITSDF B56.5:2012
T _M (mission time)	20 years (EN ISO 13849-1:2015) ⁷⁾

¹⁾ With the Slow speed setting. No objects will be detected from the measurement origin to a distance of 50 mm.

²⁾ 6% ... 90% remission factor.

³⁾ Corresponds to 4.4 σ .

⁴⁾ Depending on the configured speed and interface.

⁵⁾ Lateral entry of the object into the measuring range.

⁶⁾ Wavelength: 658 nm; max. output: 250 mW; pulse duration: 4 ns; duty cycle: 1/500.

⁷⁾ 10 years at 50 °C ambient temperature.

Interfaces

IO-Link	✓, V1.1
Function	Process data
Data transmission rate	38,4 kbit/s (COM2)
Digital output	
Number	1 ... 2 ^{1) 2)}
Type	Push-pull: PNP/NPN
Function	Configurable Q2 output: analog output / digital output
Maximum output current I _A	≤ 100 mA
Analog output	
Number	1
Type	Current output
Current	4 mA ... 20 mA, ≤ 450 Ω
Resolution	12 bit
Multifunctional input (MF)	1 x ³⁾
Hysteresis	10 mm 25 mm 50 mm
Interface for parametrization	SOPAS ET ⁴⁾

¹⁾ Output Q short-circuit protected.

²⁾ Voltage drop < 3 V.

³⁾ Response time ≤ 60 ms.

⁴⁾ Additional SiLink2 Master accessory required.

Electronics

Supply voltage U_B	DC 19.2 V ... 26.4 V ¹⁾
Power consumption	≤ 1.7 W ²⁾
Ripple	≤ 5 V _{pp} ³⁾
Initialization time	≤ 500 ms

¹⁾ Limit values, reverse-polarity protected, operation in short-circuit protected network: max. 8 A.

²⁾ Without load, at +20 °C.

³⁾ May not fall short of or exceed V_S tolerances.

Warm-up time	≤ 20 min
Indication	LEDs
Enclosure rating	IP67
Protection class	III
Electrical safety	IEC 61010-1 (ed. 3)

¹⁾ Limit values, reverse-polarity protected, operation in short-circuit protected network: max. 8 A.

²⁾ Without load, at +20 °C.

³⁾ May not fall short of or exceed V_S tolerances.

Mechanics

Dimensions (W x H x D)	32 mm x 58.67 mm x 42.7 mm
Housing material	Plastic (ABS/PC)
Window material	Plastic (PMMA)
Weight	65 g
Connection type	Male connector, M12, 5-pin

Ambient data

Ambient temperature, operation	-25 °C ... +50 °C, $U_V \leq 24$ V
Ambient temperature, storage	-40 °C ... +75 °C
Max. rel. humidity (not condensing)	≤ 95 %
Temperature drift	0.5 mm/K
Typ. Ambient light immunity	Direct exposure: 3,000 lx Indirect exposure: 40,000 lx
Vibration resistance	EN 60068-2-6, EN 60068-2-64
Shock resistance	EN 60068-2-27
Electromagnetic compatibility (EMC)	EN 61000-6-2, EN 61000-6-3, EN 61000-6-4 ¹⁾

¹⁾ This is a Class A device. This device can cause radio interference in living quarters.

Certificates


EU declaration of conformity	✓
UK declaration of conformity	✓
ACMA declaration of conformity	✓
Moroccan declaration of conformity	✓
China-RoHS	✓
TÜV approval	✓
TÜV approval annex	✓
cTUVus certificate	✓
EC-Type-Examination approval	✓

Classifications


ECLASS 5.0	27270801
ECLASS 5.1.4	27270801
ECLASS 6.0	27270801
ECLASS 6.2	27270801

ECLASS 7.0	27270801
ECLASS 8.0	27270801
ECLASS 8.1	27270801
ECLASS 9.0	27270801
ECLASS 10.0	27270801
ECLASS 11.0	27270801
ECLASS 12.0	27270916
ETIM 5.0	EC001825
ETIM 6.0	EC001825
ETIM 7.0	EC001825
ETIM 8.0	EC001825
UNSPSC 16.0901	41111613

Dimensional drawing

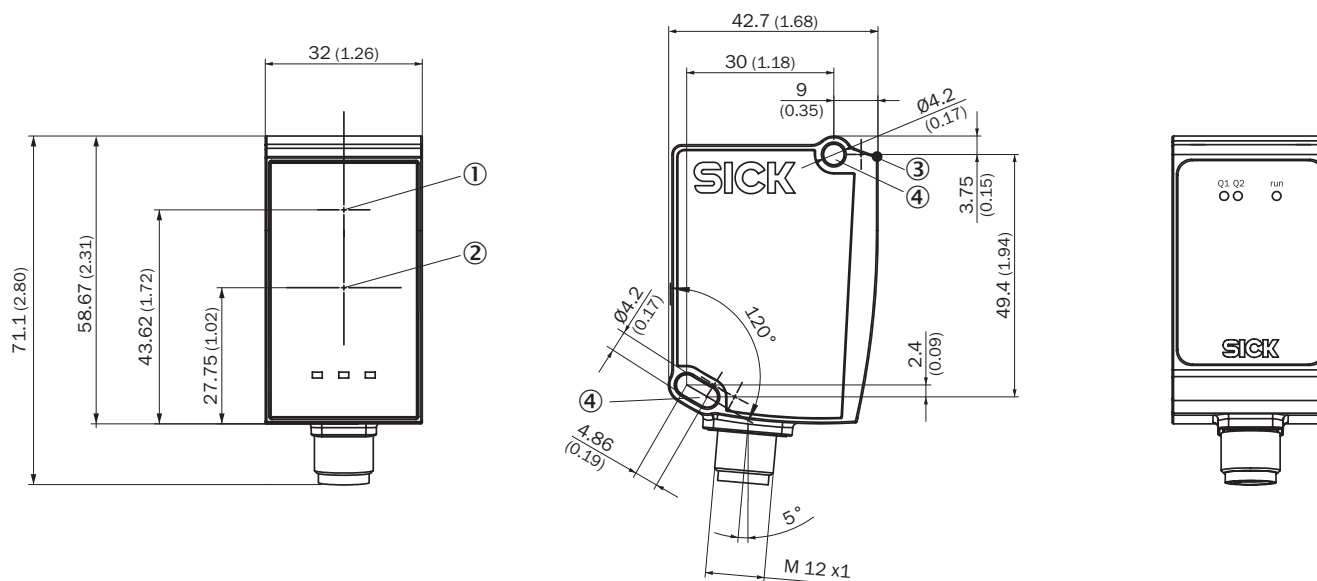

Connection type Male connector M12, 5-pin



Recommended accessories

Other models and accessories → www.sick.com/Dx35

	Brief description	Type	part no.
Mounting systems			
	Description: Alignment unit Material: Steel Details: Steel, zinc coated Items supplied: Mounting hardware for the sensor included	BEF-AH-DX50	2048397
	Description: Plate N02 for universal clamp bracket Material: Steel, zinc diecast Details: Zinc plated steel (sheet), Zinc die cast (clamping bracket) Items supplied: Universal clamp (5322626), mounting hardware Usable for: W4S-3 Glass, W10, W4SLG-3, W4S-3 Inox, W4S-3 Inox Glass, W9, W11-2, W12-3, W12-2 Laser, W12G, W12 Teflon, W16, W250, W250-2, PowerProx, W11G-2, TranspaTect, WTT12, UC12, P250, G6 Inox, W4S, W4SL-3V, W4SLG-3V, W4SL-3H	BEF-KHS-N02	2051608
	Description: Mounting bracket: horizontal sending axis for ceiling or floor installation or vertical sending axis for wall installation, steel, zinc coated, incl. mounting material Material: Steel Details: Steel, zinc coated Items supplied: Mounting hardware for the sensor included	BEF-WN-DX35	2069592

	Brief description	Type	part no.
connectors and cables			
	Connection type head A: Female connector, M12, 5-pin, straight, A-coded Connection type head B: Male connector, M12, 5-pin, straight, A-coded Signal type: Sensor/actuator cable Cable: 2 m, 5-wire, PUR, halogen-free Description: Sensor/actuator cable, unshielded Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation	YF2A15-020UB5M2A15	2096009
	Connection type head A: Female connector, M12, 5-pin, angled, A-coded Connection type head B: Flying leads Signal type: Sensor/actuator cable Cable: 2 m, 5-wire, PVC Description: Sensor/actuator cable, unshielded Application: Zones with chemicals, Uncontaminated zones	YG2A15-020VB5XLEAX	2096215
	Connection type head A: Female connector, M12, 5-pin, straight, A-coded Connection type head B: Flying leads Signal type: Sensor/actuator cable Cable: 2 m, 5-wire, PVC Description: Sensor/actuator cable, unshielded Application: Zones with chemicals, Uncontaminated zones	YF2A15-020VB5XLEAX	2096239
	Connection type head A: Female connector, M12, 5-pin, angled, A-coded Connection type head B: Flying leads Signal type: Sensor/actuator cable Cable: 0.6 m, 5-wire, PVC Description: Sensor/actuator cable, unshielded Application: Zones with chemicals, Uncontaminated zones	YG2A15-C60VB5XLEAX	2145573
	Connection type head A: Female connector, M12, 5-pin, angled, A-coded Connection type head B: Flying leads Signal type: Sensor/actuator cable Cable: 1 m, 5-wire, PVC Description: Sensor/actuator cable, unshielded Application: Zones with chemicals, Uncontaminated zones	YG2A15-010VB5XLEAX	2145574
	Connection type head A: Female connector, M12, 5-pin, angled, A-coded Connection type head B: Flying leads Signal type: Sensor/actuator cable Cable: 3 m, 5-wire, PVC Description: Sensor/actuator cable, unshielded Application: Zones with chemicals, Uncontaminated zones	YG2A15-030VB5XLEAX	2145575
	Connection type head A: Female connector, M12, 5-pin, straight, A-coded Connection type head B: Flying leads Signal type: Sensor/actuator cable Cable: 0.6 m, 5-wire, PVC Description: Sensor/actuator cable, unshielded Application: Zones with chemicals, Uncontaminated zones	YF2A15-C60VB5XLEAX	2145570
	Connection type head A: Female connector, M12, 5-pin, straight, A-coded Connection type head B: Flying leads Signal type: Sensor/actuator cable Cable: 3 m, 5-wire, PVC Description: Sensor/actuator cable, unshielded Application: Zones with chemicals, Uncontaminated zones	YF2A15-030VB5XLEAX	2145572
network devices			
		IOLA2US-01101 (SiLink2 Master)	1061790

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com