



## DT80-311111

Dx80

TIME-OF-FLIGHT SENSORS

**SICK**  
Sensor Intelligence.



### Ordering information

Type	part no.
DT80-311111	1118113

Other models and accessories → [www.sick.com/Dx80](http://www.sick.com/Dx80)



### Detailed technical data

#### Features

<b>Measuring range</b>	50 mm ... 80,000 mm, 90% remission factor <sup>1)</sup> 50 mm ... 40,000 mm, 90% remission factor 50 mm ... 14,000 mm, 6% remission factor <sup>2)</sup>
<b>Target</b>	Natural objects
<b>Resolution</b>	0.1 mm
<b>Repeatability</b>	≥ 0.2 mm <sup>3) 4) 5)</sup>
<b>Measurement accuracy</b>	± 2 mm <sup>5) 6)</sup>
<b>Response time</b>	33 ms ... 68 ms <sup>7)</sup>
<b>Output time</b>	33 ms, 50 ms, 100 ms, 200 ms ... 3000 ms <sup>8)</sup>
<b>Light source</b>	Laser, red <sup>9)</sup>
<b>Type of light</b>	Visible red light
<b>Laser class</b>	2 (IEC 60825-1:2014, EN 60825-1:2014)
<b>Typ. light spot size (distance)</b>	5.5 mm x 7.5 mm (at 1 m) <sup>10)</sup> 6.5 mm x 7 mm (at 5 m) 7.5 mm x 6.5 mm (at 10 m) 12.5 mm x 8 mm (at 20 m)

<sup>1)</sup> At good ambient conditions, at measurement cycle time ≤ 3,000 ms.

<sup>2)</sup> At the maximum permissible ambient temperature, the maximum measuring range may be reduced by up to 40%.

<sup>3)</sup> See diagrams for repeatability.

<sup>4)</sup> Equivalent to 1 σ.

<sup>5)</sup> 6% ... 90% remission factor.

<sup>6)</sup> Typical temperature drift: 0.1 mm/K.

<sup>7)</sup> Depends on the measuring speed and the object.

<sup>8)</sup> Continuously changing data output.

<sup>9)</sup> Wavelength: 655 nm, max. average power: < 1 mW, pulse length: > 400 ps.

<sup>10)</sup> See light spot size diagram.

<b>Average laser service life (at 25 °C)</b>	21.5 mm x 11 mm (At 40 m)
<b>Safety-related parameters</b>	100,000 h
MTTF <sub>D</sub>	101 years

- 1) At good ambient conditions, at measurement cycle time  $\leq 3,000$  ms.
- 2) At the maximum permissible ambient temperature, the maximum measuring range may be reduced by up to 40%.
- 3) See diagrams for repeatability.
- 4) Equivalent to  $1\sigma$ .
- 5) 6% ... 90% remission factor.
- 6) Typical temperature drift: 0.1 mm/K.
- 7) Depends on the measuring speed and the object.
- 8) Continuously changing data output.
- 9) Wavelength: 655 nm, max. average power: < 1 mW, pulse length: > 400 ps.
- 10) See light spot size diagram.

## Interfaces

<b>IO-Link</b>	✓, IO-Link V1.1, COM3 (230,4 kBaud)
Function	Process data, parameterization, diagnosis, data storage
<b>Digital input</b>	1Response time depends on the measuring speed
<b>Digital output</b>	
Number	1 ... 2 <sup>1) 2) 3)</sup>
Type	Push-pull: PNP/NPN
Function	Complementary digital outputs (Q, $\bar{Q}$ )
	Output Q <sub>2</sub> adaptable: Current output / Voltage output / Digital output / Q <sub>1</sub> not / deactivated
Maximum output current I <sub>A</sub>	$\leq 100$ mA
<b>Analog output</b>	
Number	1
Type	Current output / voltage output
Function	Output Q <sub>2</sub> adaptable: Current output / Voltage output / Digital output / Q <sub>1</sub> not / deactivated
Current	4 mA ... 20 mA, $\leq 450$ $\Omega$
Voltage	0 V ... 10 V, $\leq 10,000$ $\Omega$
Resolution	16 bit
<b>Multifunctional input (MF)</b>	1 x <sup>4)</sup>
<b>Hysteresis</b>	0 mm ... 40,000 mm

- 1) Output Q short-circuit protected.
- 2) Voltage drop  $< 3$  V.
- 3) Max. total output current  $< 200$  mA.
- 4) Response time depends on the measuring speed.

## Electronics

<b>Supply voltage U<sub>B</sub></b>	12 V ... 30 V <sup>1) 2)</sup>
<b>Power consumption</b>	$\leq 2$ W <sup>3)</sup>

- 1) Limit values, reverse-polarity protected. Short circuit-protected mains operation: max. 5 A at 30 V DC.
- 2) When using IO-Link output V<sub>S</sub> > 18 V. When using analog voltage output V<sub>S</sub> > 13 V.
- 3) Without load, at ambient temperature  $\geq 0$  °C.
- 4) May not fall short of or exceed V<sub>S</sub> tolerances.

<b>Ripple</b>	$\leq 5 \text{ V}_{\text{pp}}^4)$
<b>Initialization time</b>	1,100 ms
<b>Warm-up time</b>	$\leq 1 \text{ min}$
<b>Display</b>	4 x LED, Full color LCD display
<b>Enclosure rating</b>	IP65, IP67
<b>Protection class</b>	III

<sup>1)</sup> Limit values, reverse-polarity protected. Short circuit-protected mains operation: max. 5 A at 30 V DC.

<sup>2)</sup> When using IO-Link output  $V_s > 18 \text{ V}$ . When using analog voltage output  $V_s > 13 \text{ V}$ .

<sup>3)</sup> Without load, at ambient temperature  $\geq 0 \text{ }^\circ\text{C}$ .

<sup>4)</sup> May not fall short of or exceed  $V_S$  tolerances.

## Mechanics

<b>Dimensions (W x H x D)</b>	33 mm x 65 mm x 57.04 mm
<b>Housing material</b>	Metal (zinc diecast)
<b>Window material</b>	Plastic (PMMA)
<b>Weight</b>	280 g
<b>Connection type</b>	Cable with male connector, M12, 5-pin, 300 mm

## Ambient data

<b>Ambient temperature, operation</b>	-10 °C ... +50 °C, $U_v \leq 30 \text{ V}$ -10 °C ... +80 °C, operation with 2 cooling plates (2138205) / optionally with heat protection filter (2137825) <sup>1)</sup>
<b>Ambient temperature, storage</b>	-25 °C ... +70 °C
<b>Temperature drift</b>	Typ. 0.1 mm/K
<b>Typ. Ambient light immunity</b>	30,000 lx
<b>Vibration resistance</b>	(IEC 60068-2-6:2007) Sinusoidal resonance measurement: 10 Hz ... 1,000 Hz (IEC 60068-2-6:2007) Sinusoidal measurement: 10 Hz ... 500 Hz, 10 g, 10 frequency cycles (IEC 60068-2-64:2008) Noise test: 10 Hz ... 500 Hz, 13.5 g RMS, 5 h
<b>Shock resistance</b>	IEC 60068-2-27:2008) 100 g, 6 ms, 6 axes, $\pm 3$ single shocks / axis (IEC 60068-2-27:2008) 40 g, 6 ms, 6 axes, $\pm 4,000$ continuous shocks / axis (IEC 60068-2-27:2008) 50 g, 3 ms, 6 axes, $\pm 5,000$ continuous shocks / axis (IEC 60068-2-27:2008) 70 g, 6 ms, 1 axis, $\pm 100,000$ shocks / axis
<b>Electromagnetic compatibility (EMC)</b>	EN 61000-6-2 / EN 61000-6-3

<sup>1)</sup> With water cooling.

## Classifications


<b>ECLASS 5.0</b>	27270801
<b>ECLASS 5.1.4</b>	27270801
<b>ECLASS 6.0</b>	27270801
<b>ECLASS 6.2</b>	27270801
<b>ECLASS 7.0</b>	27270801
<b>ECLASS 8.0</b>	27270801
<b>ECLASS 8.1</b>	27270801
<b>ECLASS 9.0</b>	27270801
<b>ECLASS 10.0</b>	27270801
<b>ECLASS 11.0</b>	27270801

<b>ECLASS 12.0</b>	27270916
<b>ETIM 5.0</b>	EC001825
<b>ETIM 6.0</b>	EC001825
<b>ETIM 7.0</b>	EC001825
<b>ETIM 8.0</b>	EC001825
<b>UNSPSC 16.0901</b>	41111613

Certificates

<b>EU declaration of conformity</b>	✓
<b>UK declaration of conformity</b>	✓
<b>ACMA declaration of conformity</b>	✓
<b>China-RoHS</b>	✓
<b>IO-Link</b>	✓
<b>cTUVus certificate</b>	✓


Dimensional drawing

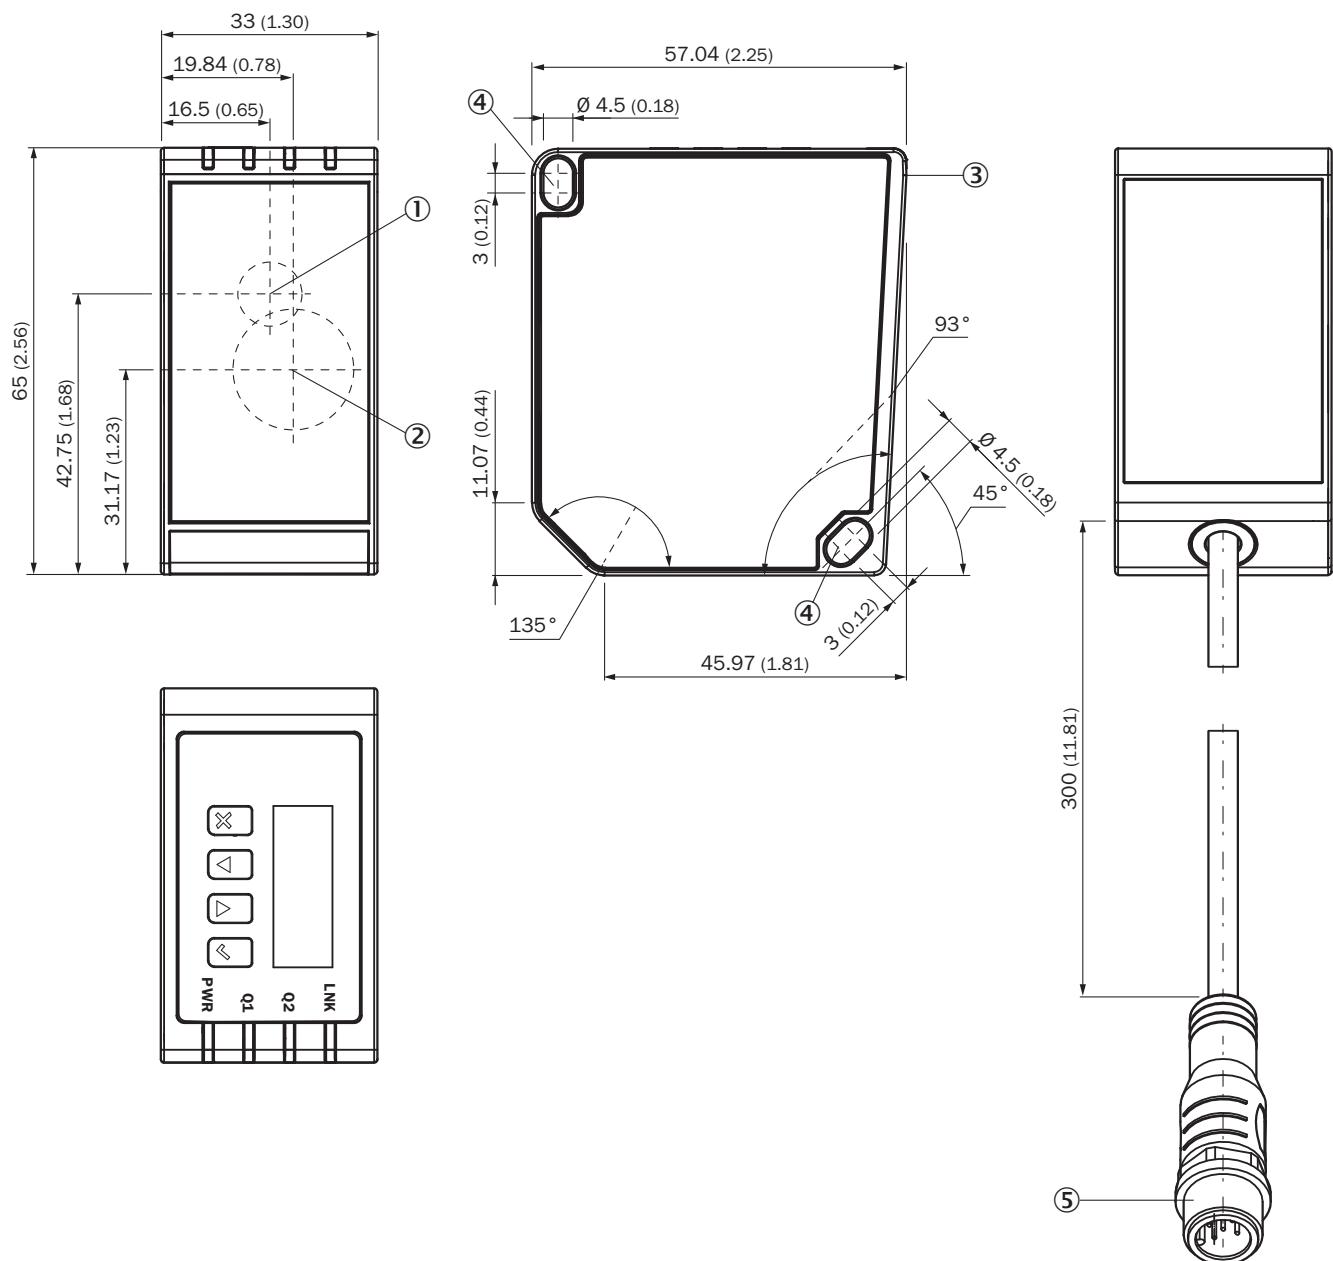


Dimensions in mm (inch)

- ① optical axis, sender
- ② optical axis, receiver
- ③ Reference surface (corresponds to distance 0 mm)
- ④ M4 fixing holes
- ⑤ cable with plug M12, 5-pin

## Connection diagram




## Light spot size

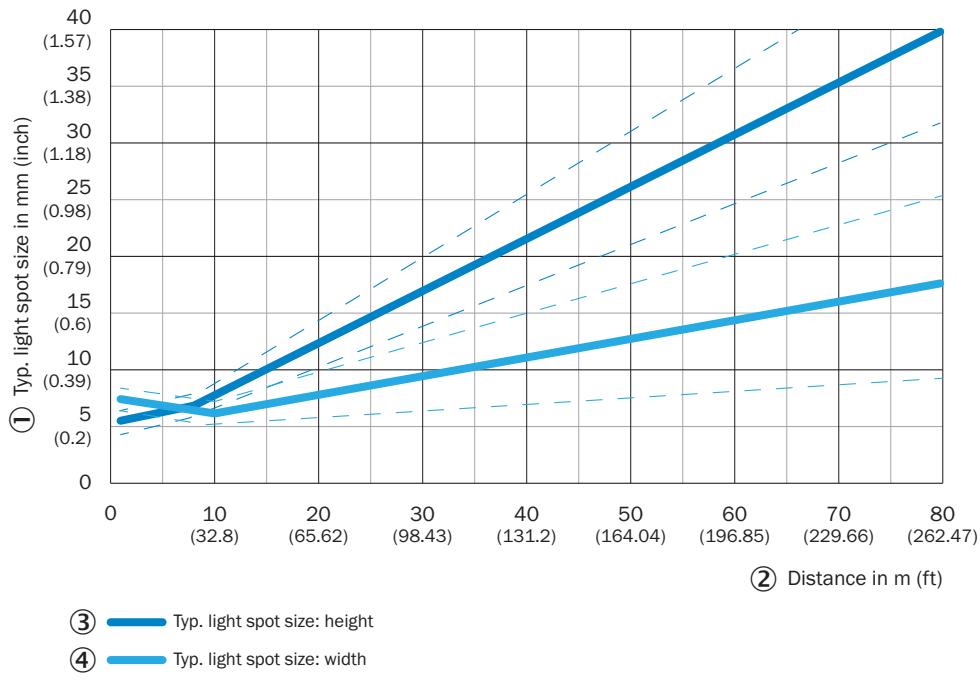


### Light spot size at different distances

- ① Typ. light spot size in mm (inch)
- ② Distance in meters (feet)
- ③ Typ. light spot size: Height
- ④ Typ. light spot size: Width

## repeatability, 90% remission, 10,000 lux

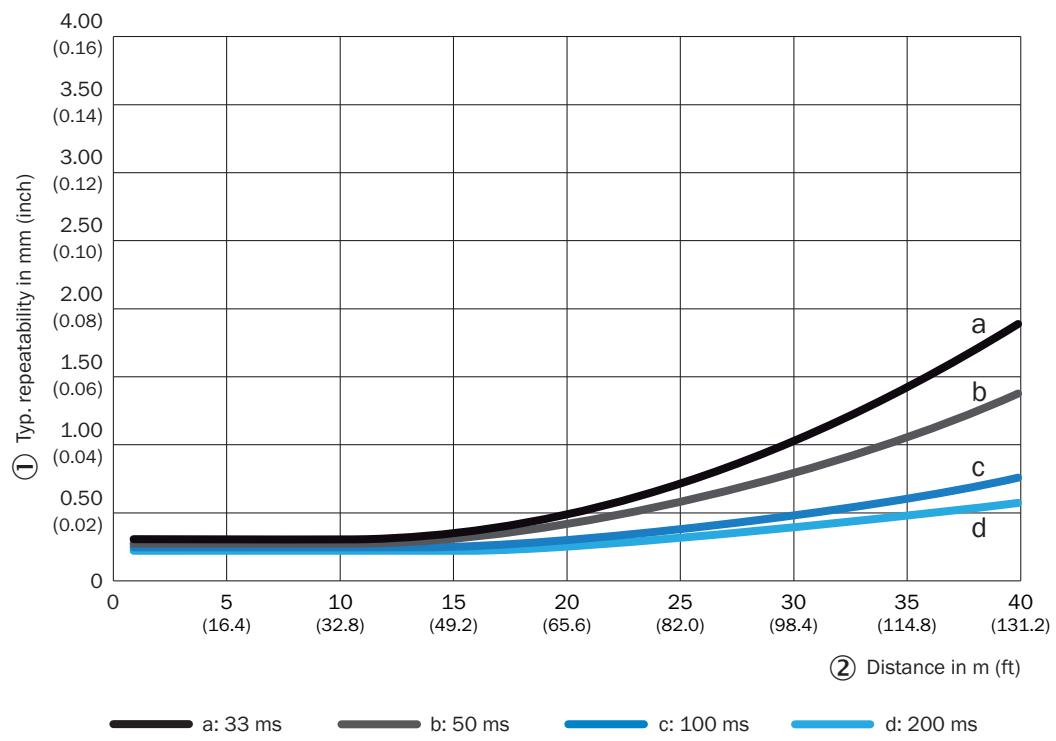


## repeatability, 6% remission, 30,000 lux

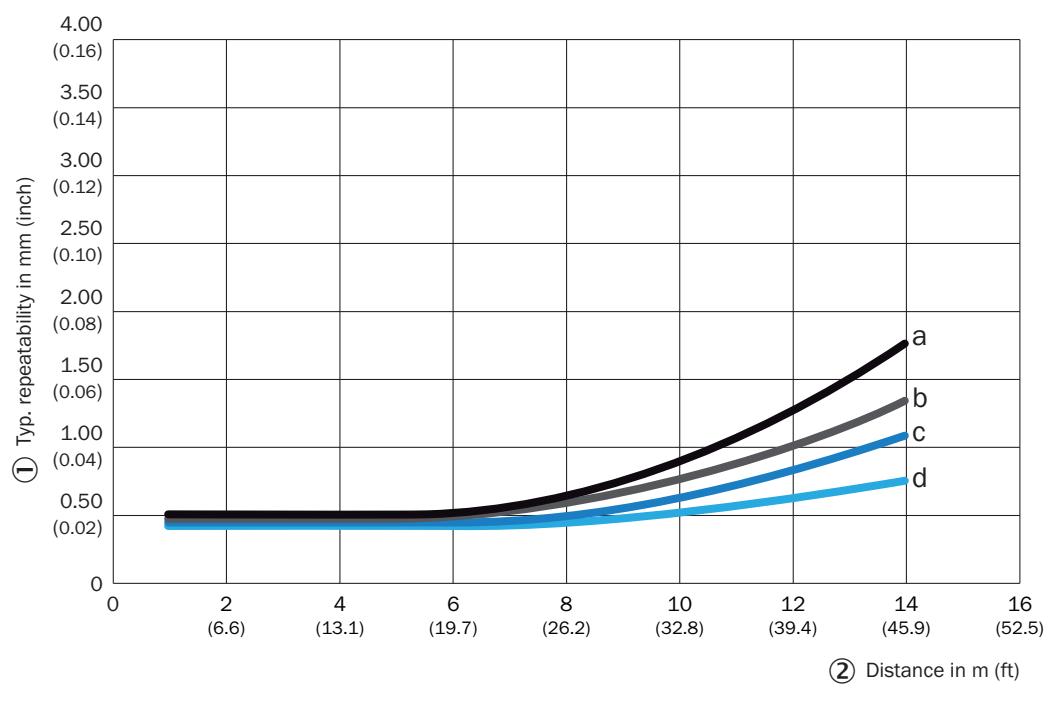

① typical repeatability in mm (inches)

② Distance in meters (feet)


repeatability, 6% remission, 10,000 lux

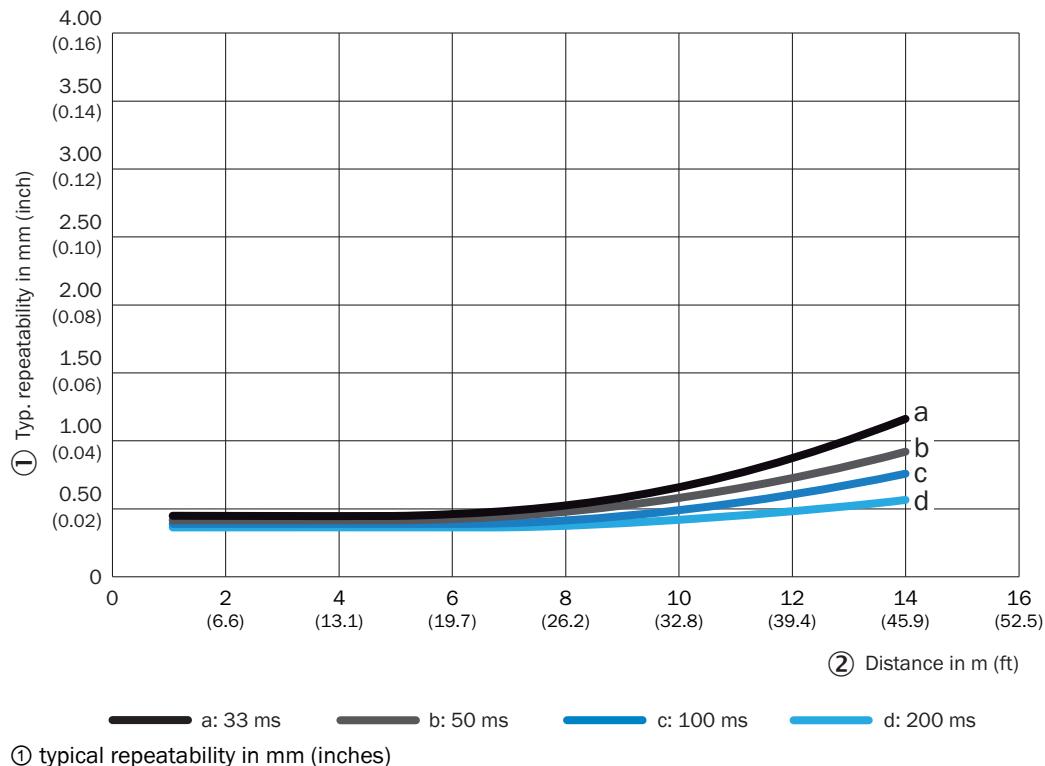

① typical repeatability in mm (inches)

② Distance in meters (feet)

repeatability, 90% remission, 30,000 lux

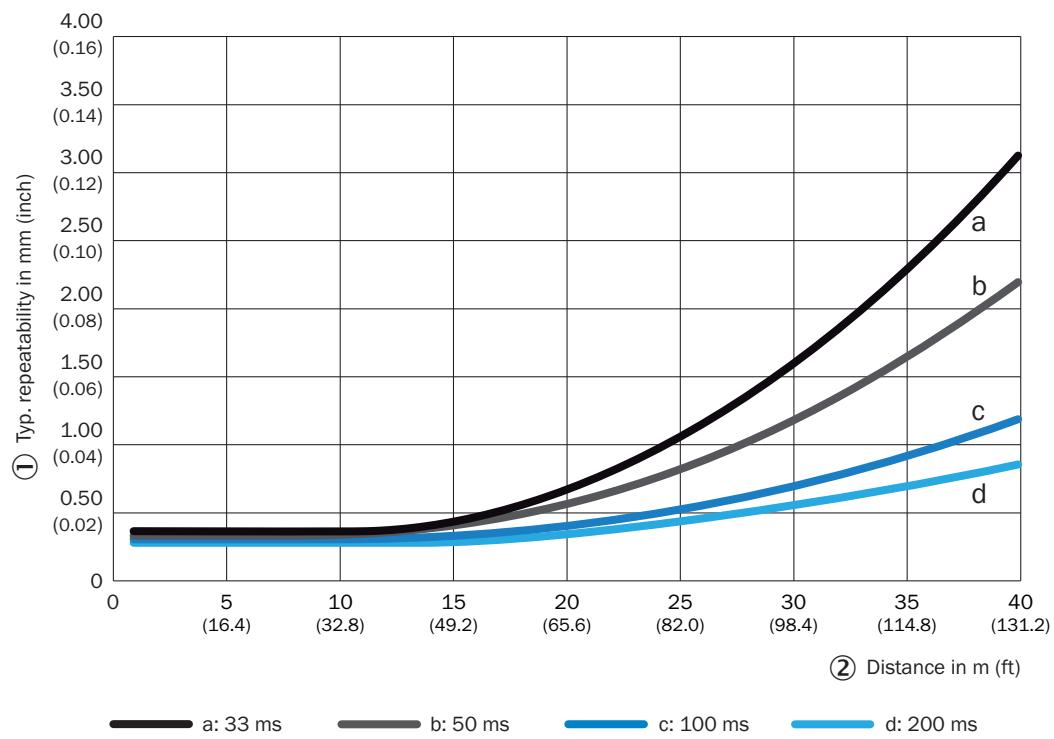

① typical repeatability in mm (inches)

② Distance in meters (feet)

## Recommended accessories

Other models and accessories → [www.sick.com/Dx80](http://www.sick.com/Dx80)

	Brief description	Type	part no.
<b>Mounting systems</b>			
	<ul style="list-style-type: none"> <li><b>Description:</b> Mounting bracket, steel, zinc coated</li> <li><b>Material:</b> Steel</li> <li><b>Details:</b> Steel, zinc coated</li> <li><b>Items supplied:</b> Mounting hardware for the sensor included</li> </ul>	BEF-WN-DX50	2048370
	<ul style="list-style-type: none"> <li><b>Description:</b> Alignment unit</li> <li><b>Material:</b> Steel</li> <li><b>Details:</b> Steel, zinc coated</li> <li><b>Items supplied:</b> Mounting hardware for the sensor included</li> </ul>	BEF-AH-DX50	2048397

	Brief description	Type	part no.
device protection and care			
	<ul style="list-style-type: none"><li><b>Description:</b> Weather Cover for Dx35/Dx50/Dx50-2/Dx80</li></ul>	OBW-KHS-M02	2050205
	<ul style="list-style-type: none"><li><b>Description:</b> Cooling plate for Dx80 (for water cooling)</li></ul>	BEF-KP-Dx80	2138205
	<ul style="list-style-type: none"><li><b>Description:</b> Thermal shield for Dx80 with NIR filter for use with 2x cold plate BEF-KP-Dx80</li></ul>	Heat protection filter for Dx80	2137825
connectors and cables			
	<ul style="list-style-type: none"><li><b>Connection type head A:</b> Female connector, M12, 5-pin, straight, A-coded</li><li><b>Connection type head B:</b> Male connector, M12, 5-pin, straight, A-coded</li><li><b>Signal type:</b> Sensor/actuator cable</li><li><b>Cable:</b> 5 m, 5-wire, PUR, halogen-free</li><li><b>Description:</b> Sensor/actuator cable, shielded</li><li><b>Application:</b> Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation</li></ul>	YF2A85-050UB6M2A85	2096119
	<ul style="list-style-type: none"><li><b>Connection type head A:</b> Female connector, M12, 5-pin, straight, A-coded</li><li><b>Connection type head B:</b> Male connector, M12, 5-pin, straight, A-coded</li><li><b>Signal type:</b> Sensor/actuator cable</li><li><b>Cable:</b> 5 m, 5-wire, PUR, halogen-free</li><li><b>Description:</b> Sensor/actuator cable, unshielded</li><li><b>Application:</b> Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation</li></ul>	YF2A15-050UE3M2A15	2140039
	<ul style="list-style-type: none"><li><b>Connection type head A:</b> Female connector, M12, 5-pin, straight, A-coded</li><li><b>Connection type head B:</b> Flying leads</li><li><b>Signal type:</b> Sensor/actuator cable</li><li><b>Cable:</b> 5 m, 5-wire, PUR, halogen-free</li><li><b>Description:</b> Sensor/actuator cable, unshielded</li><li><b>Application:</b> Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation</li></ul>	YF2A15-050UE3XLEAX	2140038
	<ul style="list-style-type: none"><li><b>Connection type head A:</b> Female connector, M12, 5-pin, straight, A-coded</li><li><b>Connection type head B:</b> Flying leads</li><li><b>Signal type:</b> Sensor/actuator cable</li><li><b>Cable:</b> 5 m, 5-wire, PUR, halogen-free</li><li><b>Description:</b> Sensor/actuator cable, shielded</li><li><b>Application:</b> Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation</li></ul>	YF2A25-050UB6XLEAX	2095733
	<ul style="list-style-type: none"><li><b>Connection type head A:</b> Female connector, M12, 5-pin, straight, A-coded</li><li><b>Connection type head B:</b> Flying leads</li><li><b>Signal type:</b> Sensor/actuator cable</li><li><b>Cable:</b> 2 m, 5-wire, PUR, halogen-free</li><li><b>Description:</b> Sensor/actuator cable, shielded</li><li><b>Application:</b> Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation</li></ul>	YF2A25-020UB6XLEAX	2145583
	<ul style="list-style-type: none"><li><b>Connection type head A:</b> Female connector, M12, 5-pin, straight, A-coded</li><li><b>Connection type head B:</b> Flying leads</li><li><b>Signal type:</b> Sensor/actuator cable</li><li><b>Cable:</b> 1 m, 5-wire, PUR, halogen-free</li><li><b>Description:</b> Sensor/actuator cable, shielded</li><li><b>Application:</b> Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation</li></ul>	YF2A25-010UB6XLEAX	2145582
	<ul style="list-style-type: none"><li><b>Connection type head A:</b> Female connector, M12, 5-pin, straight, A-coded</li><li><b>Connection type head B:</b> Flying leads</li><li><b>Signal type:</b> Sensor/actuator cable</li><li><b>Cable:</b> 0.6 m, 5-wire, PUR, halogen-free</li><li><b>Description:</b> Sensor/actuator cable, shielded</li><li><b>Application:</b> Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation</li></ul>	YF2A25-C60UB6XLEAX	2145581

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

**For us, that is "Sensor Intelligence."**

## WORLDWIDE PRESENCE:

Contacts and other locations [www.sick.com](http://www.sick.com)