



GSE6SP-22A121AEZZZ

G6

PHOTOELECTRIC SENSORS

SICK
Sensor Intelligence.



Ordering information

| Type | part no. |
|--------------------|----------|
| GSE6SP-22A121AEZZZ | 1139415 |

Other models and accessories → www.sick.com/G6

Illustration may differ

Detailed technical data

Features

| | |
|--|--|
| Functional principle | Through-beam photoelectric sensor |
| Sensing range | |
| Sensing range min. | 0 m |
| Sensing range max. | 20 m |
| Recommended sensing range for the best performance | 0 m ... 17 m |
| Emitted beam | |
| Light source | PinPoint LED |
| Type of light | Visible red light |
| Shape of light spot | Point-shaped |
| Light spot size (distance) | Ø 473.8 mm (10 m) |
| Key LED figures | |
| Normative reference | EN 62471:2008-09 IEC 62471:2006, modified |
| LED risk group marking | Free group |
| Wave length | 640 nm |
| Average service life | 100,000 h at $T_a = +25^\circ\text{C}$ |
| Adjustment | |
| Operating mode switch | For inverting the switching function (light/dark switching) |
| Display | |
| LED green | Operating indicatorStatic on: power on |
| LED yellow | Status of received light beamStatic on: object not presentStatic off: object present |

Electronics

| | |
|--|--|
| Supply voltage U_B | 10 V DC ... 30 V DC ¹⁾ |
| Ripple | $\leq 5 \text{ V}_{\text{pp}}$ |
| Usage category | DC-12 (According to EN 60947-5-2) DC-13 (According to EN 60947-5-2) |

¹⁾ Limit values.²⁾ At $U_B > 24 \text{ V}$, $I_{\text{max.}} = 50 \text{ mA}$.³⁾ Signal transit time with resistive load.⁴⁾ With light/dark ratio 1:1.

| | |
|---------------------------------------|--|
| Current consumption | ≤ 30 mA, without load. At $U_B = 24$ V |
| Protection class | III |
| Digital output | |
| Number | 1 |
| Type | PNP |
| Switching mode | Light switching |
| Signal voltage PNP HIGH/LOW | Approx. U_B -3 V / 0 V |
| Output current $I_{max.}$ | ≤ 100 mA ²⁾ |
| Circuit protection outputs | Reverse polarity protected |
| | Overcurrent protected |
| | Short-circuit protected |
| Response time | ≤ 625 μ s ³⁾ |
| Switching frequency | 1,000 Hz ⁴⁾ |
| Pin/Wire assignment | |
| Function of pin 4/black (BK) | Digital output, light switching, object present → output Q LOW |
| Function of pin 4/black (BK) – detail | The pin 4 function of the sensor can be switched |
| | Additional possible settings via operating mode switch |

¹⁾ Limit values.

²⁾ At $U_B > 24$ V, $I_{max.} = 50$ mA.

³⁾ Signal transit time with resistive load.

⁴⁾ With light/dark ratio 1:1.

Mechanics

| | |
|---|---------------------------------------|
| Housing | Rectangular |
| Dimensions (W x H x D) | 12 mm x 31.6 mm x 21 mm |
| Connection | Male connector M8, 4-pin |
| Material | |
| Housing | Plastic, ABS |
| Front screen | Plastic, PMMA |
| Male connector | Metal, copper alloy (C3604 CUZN39PB3) |
| Weight | Approx. 10 g |
| Maximum tightening torque of the fixing screws | 0.4 Nm |


Ambient data

| | |
|--|---|
| Enclosure rating | IP67 (EN 60529) |
| Ambient operating temperature | -30 °C ... +55 °C |
| Ambient temperature, storage | -40 °C ... +70 °C |
| Typ. Ambient light immunity | Sunlight: ≤ 30,000 lx |
| Shock resistance | 11 ms (3 positive and 3 negative shocks along X, Y, Z axes, 18 total shocks (EN60068-2-27)) |
| Vibration resistance | 10 Hz ... 55 Hz (Amplitude 0.5 mm, 3 x 30 min (EN60068-2-6)) |
| Air humidity | 35 % ... 95 %, relative humidity (no condensation) |
| Electromagnetic compatibility (EMC) | EN 60947-5-2 |
| UL File No. | NRKH.E348498 & NRKH7.E348498 |

Classifications

| | |
|-----------------------|----------|
| ECLASS 5.0 | 27270901 |
| ECLASS 5.1.4 | 27270901 |
| ECLASS 6.0 | 27270901 |
| ECLASS 6.2 | 27270901 |
| ECLASS 7.0 | 27270901 |
| ECLASS 8.0 | 27270901 |
| ECLASS 8.1 | 27270901 |
| ECLASS 9.0 | 27270901 |
| ECLASS 10.0 | 27270901 |
| ECLASS 11.0 | 27270901 |
| ECLASS 12.0 | 27270901 |
| ETIM 5.0 | EC002716 |
| ETIM 6.0 | EC002716 |
| ETIM 7.0 | EC002716 |
| ETIM 8.0 | EC002716 |
| UNSPSC 16.0901 | 39121528 |


Dimensional drawing

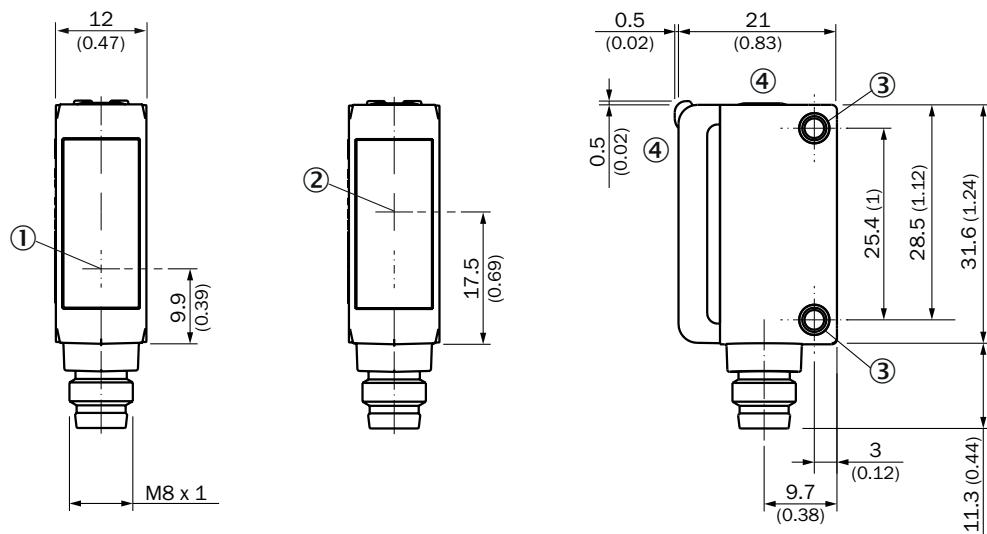

Dimensions in mm (inch)


- ① Center of optical axis, sender
- ② Center of optical axis, receiver
- ③ Mounting holes M3
- ④ display and adjustment elements

display and adjustment elements

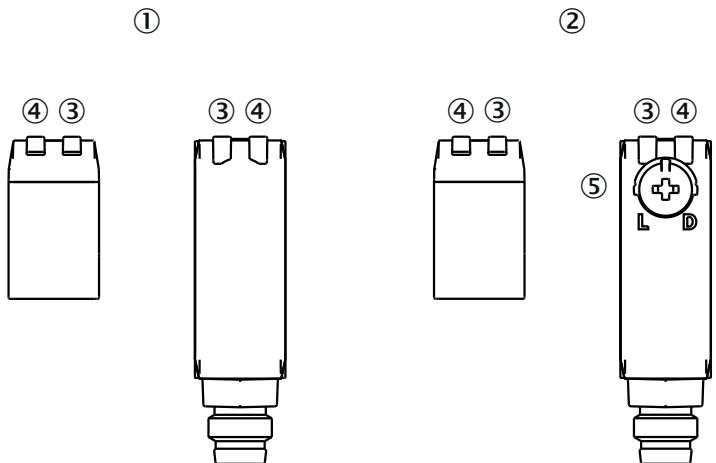

- ① sender
- ② receiver
- ③ LED green
- ④ LED yellow
- ⑤ operating mode switch


pinouts

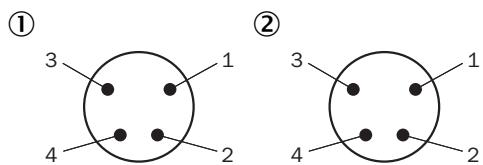



male connector M8, 4-pin

- ① receiver
- ② sender



Connection diagram Cd-057

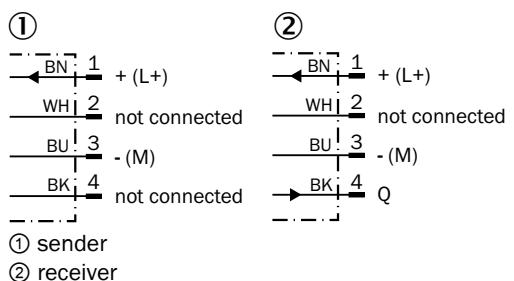


Truth table PNP - light switching Q
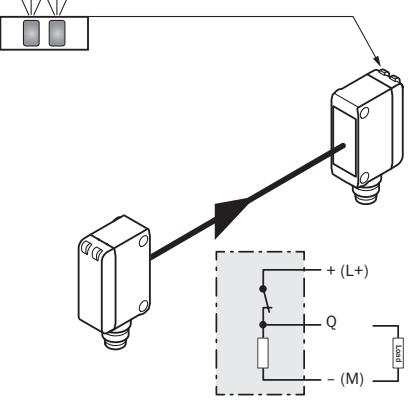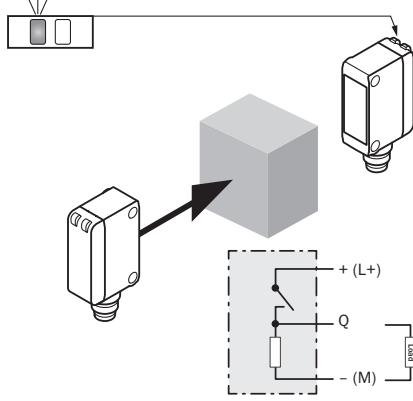
| Light switching Q (normally closed) | | |
|-------------------------------------|--|---|
| | Object not present → Output HIGH | Object present → Output LOW |
| Light receive | ✓ | ✗ |
| Light receive indicator | ✗ | ✗ |
| Load resistance | ✗ | ✗ |
| |  |  |


Truth table PNP - dark switching \bar{Q}
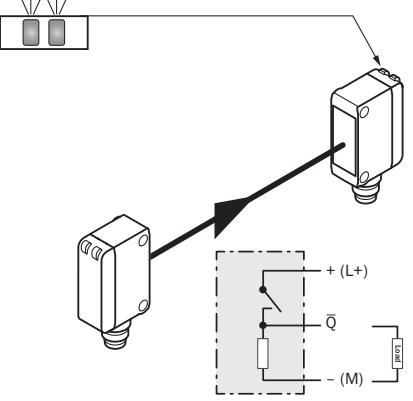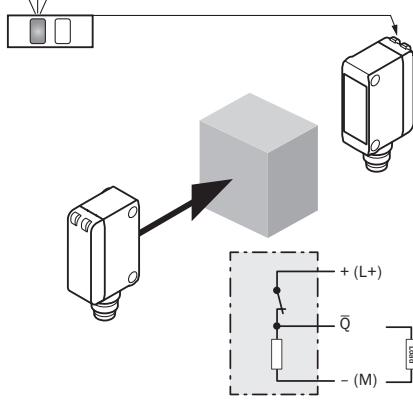
| Dark switching \bar{Q} (normally open) | | |
|--|--|---|
| | Object not present → Output LOW | Object present → Output HIGH |
| Light receive | ✓ | ✗ |
| Light receive indicator | ✗ | ✗ |
| Load resistance | ✗ | ✗ |
| |  |  |


Characteristic curve

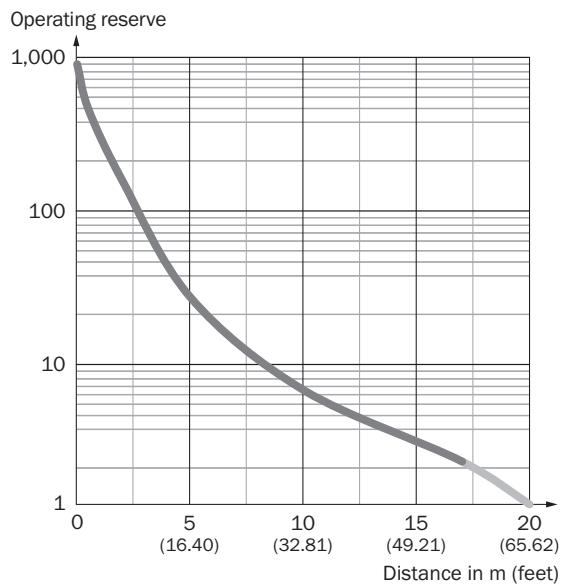

Light spot size

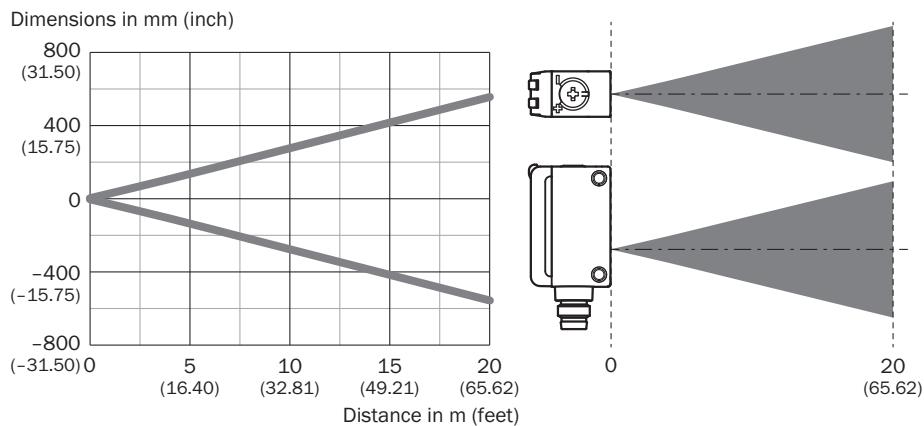

Sensing range diagram

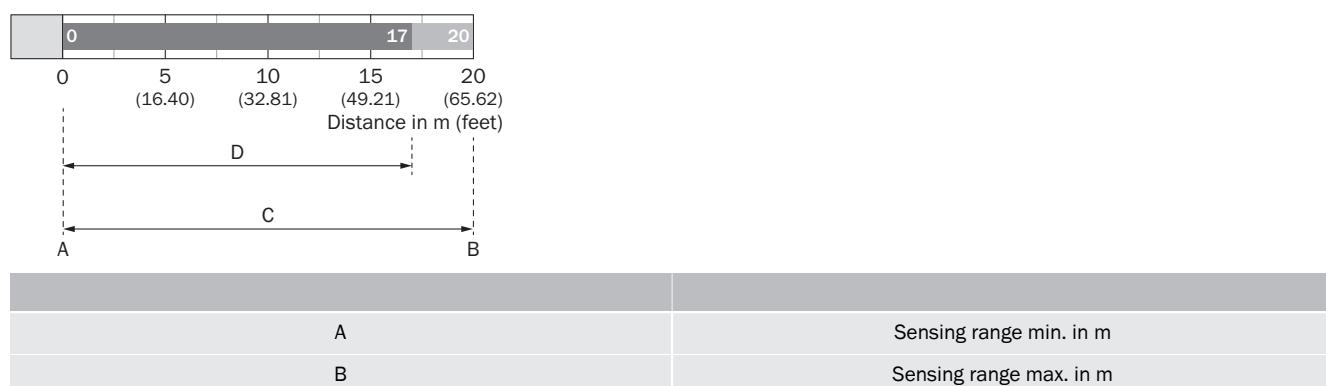

| | |
|---|--|
| C | Maximum distance range from receiver to sender |
| D | Recommended distance range from receiver to sender |

Recommended accessories

Other models and accessories → www.sick.com/G6

| | Brief description | Type | part no. |
|---|---|----------------|-----------------|
| Mounting systems | | | |
|  | <ul style="list-style-type: none"> Description: Clamp bar to fix G6 sensors on rods of 12 mm, clamp-on design up to 4 mm wall thickness Material: Steel Details: Aluminum (clamp bar), stainless steel (bracket) Items supplied: Clamp bar mounting and clamp function, mounting bracket, mounting hardware | BEF-KHS-IS12G6 | 2086865 |
|  | <ul style="list-style-type: none"> Material: Stainless steel Details: Stainless steel (1.4301) Suitable for: W4S | BEF-WN-G6 | 2062909 |

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

WORLDWIDE PRESENCE:

Contacts and other locations www.sick.com