



MWS075-12N2AEF118x12

MWS075

MEASURING WHEEL ENCODERS

SICK
Sensor Intelligence.



Illustration may differ



Ordering information

Type	part no.
MWS075-12N2AEF118x12	1149671

Included in delivery: AFM60A-S4EB018x12 (1), BEF-FA-36-49-MWS075 (1), BEF-MWS075-ARM (1), BEF-MR010020R (1)

Other models and accessories → www.sick.com/MWS075

Detailed technical data

Performance

Max. resolution (number of steps per revolution x number of revolutions)	18 bit x 12 bit (262,144 x 4,096)
Resolution in pulses/mm	1,310.72
Measuring increment (resolution in mm/pulse)	0.0008 ¹⁾ 2)
Repeatability	< 0.1 mm ³⁾

¹⁾ Calculation example: Measuring wheel circumference / number of steps per revolution = 200 mm / 16384 steps per revolution = 0.012 mm/pulse.

²⁾ Value based on measuring wheel circumference. The measuring wheel circumference depends on manufacturing tolerances, wear and tear, the selected spring tensioning force, and the behavior of the measurement wheel surface at different temperatures and on different measurement surfaces. To obtain the most accurate measurement results, we recommend performing a reference run for positioning tasks so that application-specific measuring wheel characteristics can be taken into account.

³⁾ Value is based on the mechanics. Backlash of the measuring wheel mechanics, is at a minimum. This enables a precise and repeatable measurement results.

Interfaces

Communication interface	EtherCAT®
Communication Interface detail	CoE (CAN over EtherCAT®)
Programmable/configurable	✓

Electronics

Connection type	Male connector, 1x, M12, 4-pin, axial Female connector, 2x, M12, 4-pin, axial
Supply voltage	10 V ... 30 V
Reverse polarity protection	✓

Mechanics

Measuring wheel circumference	200 mm
Measuring wheel surface	O-ring NBR70 ¹⁾
Mounting	Measuring wheel mounted at the front

¹⁾ The surface of a measuring wheel is subject to wear. This depends on contact pressure, acceleration behavior in the application, traversing speed, measurement surface, mechanical alignment of the measuring wheel, temperature, and ambient conditions. We recommend you regularly check the condition of the measuring wheel and replace as required.

²⁾ Allow for self-heating of 3.3 K per 1,000 rpm when designing the operating temperature range.

³⁾ One cycle corresponds to an upward and downward movement of ± 3 mm from the recommended pretension position.

⁴⁾ When mounted from below, the encoder weight during spring pretensioning must be taken into account.

Start up torque	0.5 Ncm
Operating torque	0.3 Ncm
Operating speed	$\leq 9,000 \text{ min}^{-1}$ ²⁾
Bearing lifetime	3.0×10^9 revolutions
Maximum travel/deflection of spring arm	14 mm at 14 N spring travel
Recommended pretension	15 N At 10 mm deflection
Max. permissible working area for the spring (continuous operation)	± 3 mm
Recommended spring deflection	2 mm ... 13 mm
Service life of spring element	> 1.4 million cycles ³⁾
Mounting position relative to the measuring object	Preferably from above, from below possible ⁴⁾
Moment of inertia of the rotor	6.2 gcm ²
Mounted encoder	AFS/AFM60 Ethernet, AFM60A-S4EB018x12, 1059060
Mounted mechanic	BEF-MWS075-ARM, 2145180
Attached measuring wheel	BEF-MR010020R, 2055224

¹⁾ The surface of a measuring wheel is subject to wear. This depends on contact pressure, acceleration behavior in the application, traversing speed, measurement surface, mechanical alignment of the measuring wheel, temperature, and ambient conditions. We recommend you regularly check the condition of the measuring wheel and replace as required.

²⁾ Allow for self-heating of 3.3 K per 1,000 rpm when designing the operating temperature range.

³⁾ One cycle corresponds to an upward and downward movement of ± 3 mm from the recommended pretension position.

⁴⁾ When mounted from below, the encoder weight during spring pretensioning must be taken into account.

Ambient data

EMC	According to EN 61000-6-2 and EN 61000-6-3
Enclosure rating	IP65 (IEC 60529) IP67 (IEC 60529)
Operating temperature range	-40 °C ... +85 °C
Storage temperature range	-40 °C ... +100 °C, without package


Certificates

EU declaration of conformity	✓
UK declaration of conformity	✓
ACMA declaration of conformity	✓
China-RoHS	✓

Classifications

ECLASS 5.0	27270501
ECLASS 5.1.4	27270501
ECLASS 6.0	27270590
ECLASS 6.2	27270590
ECLASS 7.0	27270501
ECLASS 8.0	27270501
ECLASS 8.1	27270501
ECLASS 9.0	27270501
ECLASS 10.0	27270790


ECLASS 11.0	27270707
ECLASS 12.0	27270504
ETIM 5.0	EC001486
ETIM 6.0	EC001486
ETIM 7.0	EC001486
ETIM 8.0	EC001486
UNSPSC 16.0901	41112113

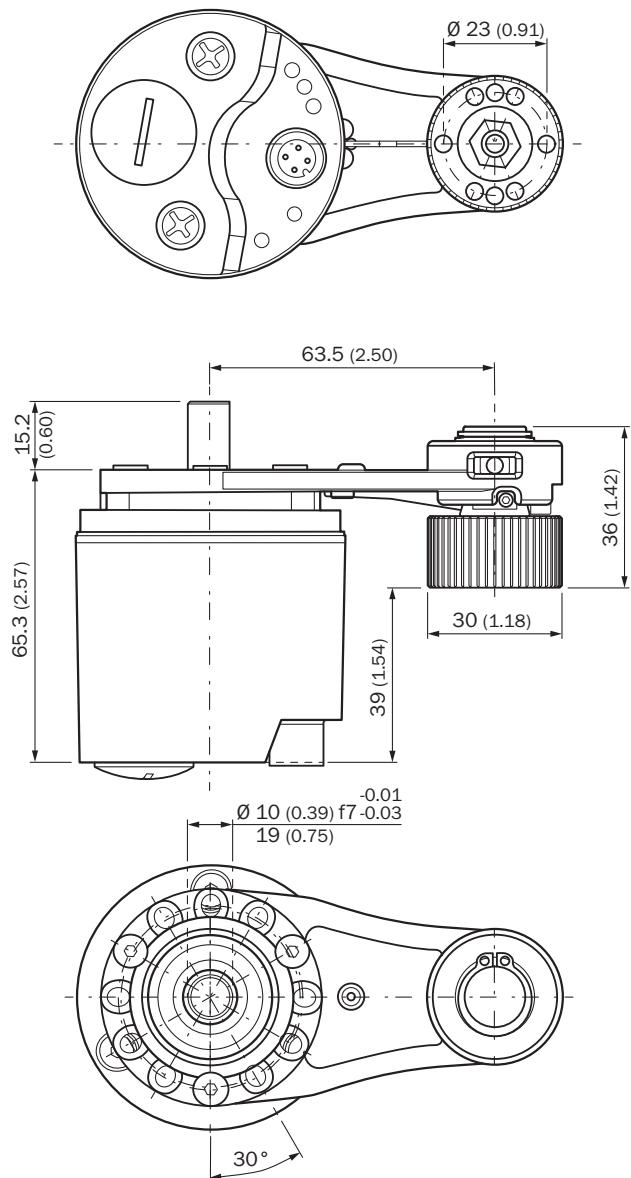Dimensional drawing

Dimensions in mm (inch)


Please refer to the dimensional drawings in the respective data sheet for the installed encoder.

Dimensional drawing

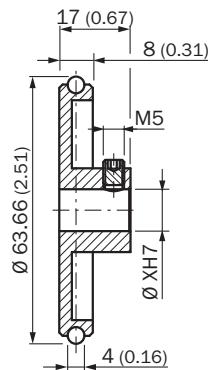

Dimensions in mm (inch)


PIN assignment Male connector



Supply voltage

PIN	Wire color	Signal
1	Brown	U _S 10 V ... 30 V
2	White	Not assigned
3	Blue	GND
4	Black	Not assigned


PIN assignment Female connector



Port 1, Port 2

PIN	Wire color	Signal
1	Yellow	T x D+
2	White	R x D+
3	Orange	T x D-
4	Blue	R x D-

Connection diagram

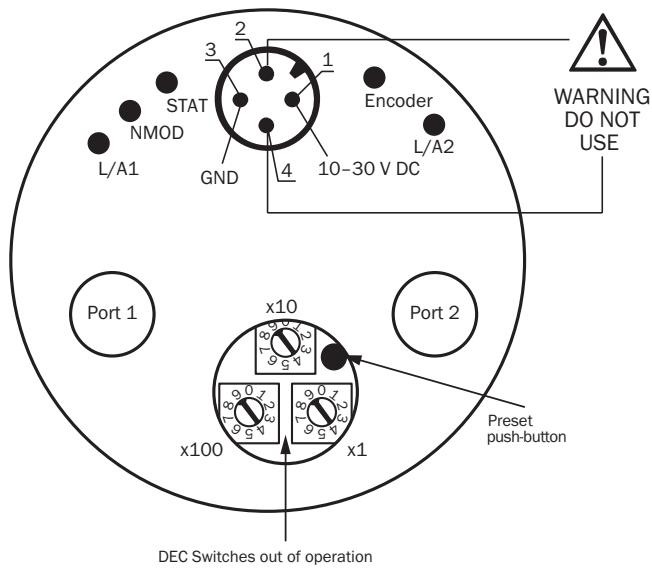

Recommended accessories

Other models and accessories → www.sick.com/MWS075

	Brief description	Type	part no.
Mounting systems			
	<ul style="list-style-type: none"> Description: Mounting bracket for MWS075 Suitable for: MWS075 	BEF-WF-MWS075	2145906

	Brief description	Type	part no.
measuring wheels and measuring wheel mechanics			
	<ul style="list-style-type: none">Product segment: Measuring wheels and measuring wheel mechanicsProduct family: Measuring wheelsDescription: Aluminium measuring wheel with O-ring (NBR70) for 10 mm solid shaft, circumference 200 mm	BEF-MR010020R	2055224
	<ul style="list-style-type: none">Product segment: Measuring wheels and measuring wheel mechanicsProduct family: Measuring wheelsDescription: Aluminium measuring wheel with O-ring (NBR70) for 10 mm solid shaft, circumference 300 mm	BEF-MR010030R	2049278
	<ul style="list-style-type: none">Product segment: Measuring wheels and measuring wheel mechanicsProduct family: Measuring wheelsDescription: Measuring wheel with O-ring (NBR70) for 10 mm solid shaft, circumference 500 mm	BEF-MR010050R	2055227
	<ul style="list-style-type: none">Product segment: Measuring wheels and measuring wheel mechanicsProduct family: Measuring wheelsDescription: Aluminum measuring wheel with cross-knurled surface for 10 mm solid shaft, circumference 200 mm	BEF-MR10200AK	4084737
	<ul style="list-style-type: none">Product segment: Measuring wheels and measuring wheel mechanicsProduct family: Measuring wheelsDescription: Aluminum measuring wheel with smooth polyurethane surface for 10 mm solid shaft, circumference 200 mm	BEF-MR10200AP	4084738
	<ul style="list-style-type: none">Product segment: Measuring wheels and measuring wheel mechanicsProduct family: Measuring wheelsDescription: Aluminum measuring wheel with ridged polyurethane surface for 10 mm solid shaft, circumference 200 mm	BEF-MR10200APG	4084740
	<ul style="list-style-type: none">Product segment: Measuring wheels and measuring wheel mechanicsProduct family: Measuring wheels	BEF-MR10200APN	4084739

	Brief description	Type	part no.
	<ul style="list-style-type: none"> Description: Aluminum measuring wheel with studded polyurethane surface for 10 mm solid shaft, circumference 200 mm 		
	<ul style="list-style-type: none"> Product segment: Measuring wheels and measuring wheel mechanics Product family: Measuring wheels Description: Aluminum measuring wheel with cross-knurled surface for 10 mm solid shaft, circumference 300 mm 	BEF-MR10300AK	2115703
	<ul style="list-style-type: none"> Product segment: Measuring wheels and measuring wheel mechanics Product family: Measuring wheels Description: Aluminum measuring wheel with smooth polyurethane surface for 10 mm solid shaft, circumference 300 mm 	BEF-MR10300AP	2118512
	<ul style="list-style-type: none"> Product segment: Measuring wheels and measuring wheel mechanics Product family: Measuring wheels Description: Aluminum measuring wheel with ridged polyurethane surface for 10 mm solid shaft, circumference 300 mm 	BEF-MR10300APG	2118496
	<ul style="list-style-type: none"> Product segment: Measuring wheels and measuring wheel mechanics Product family: Measuring wheels Description: Aluminum measuring wheel with studded polyurethane surface for 10 mm solid shaft, circumference 300 mm 	BEF-MR10300APN	2118494
	<ul style="list-style-type: none"> Product segment: Measuring wheels and measuring wheel mechanics Product family: Measuring wheels Description: Aluminum measuring wheel with cross-knurled surface for 10 mm solid shaft, circumference 500 mm 	BEF-MR10500AK	4084733
	<ul style="list-style-type: none"> Product segment: Measuring wheels and measuring wheel mechanics Product family: Measuring wheels Description: Aluminum measuring wheel with cross knurled surface for solid shaft 10 mm, circumference 500 mm +/-0,2 mm (circumferential tolerance at 20 °C. Circumferential tolerance depends on the temperature coefficient of the material) 	BEF-MR10500AK-A	2125732
	<ul style="list-style-type: none"> Product segment: Measuring wheels and measuring wheel mechanics Product family: Measuring wheels Description: Aluminum measuring wheel with smooth polyurethane surface for 10 mm solid shaft, circumference 500 mm 	BEF-MR10500AP	4084734
	<ul style="list-style-type: none"> Product segment: Measuring wheels and measuring wheel mechanics Product family: Measuring wheels Description: Aluminum measuring wheel with ridged polyurethane surface for 10 mm solid shaft, circumference 500 mm 	BEF-MR10500APG	4084736
	<ul style="list-style-type: none"> Product segment: Measuring wheels and measuring wheel mechanics Product family: Measuring wheels Description: Aluminum measuring wheel with studded polyurethane surface for 10 mm solid shaft, circumference 500 mm 	BEF-MR10500APN	4084735

	Brief description	Type	part no.
connectors and cables			
	<ul style="list-style-type: none">Connection type head A: Female connector, M12, 4-pin, straight, D-codedSignal type: PROFINETCable: CAT5, CAT5eDescription: PROFINET, shieldedConnection systems: IDC quick connectionPermitted cross-section: 0.14 mm² ... 0.34 mm²	DOS-1204-GZ	6048263
	<ul style="list-style-type: none">Connection type head A: Female connector, M12, 4-pin, angled, D-codedSignal type: PROFINETCable: CAT5, CAT5eDescription: PROFINET, shieldedConnection systems: IDC quick connectionPermitted cross-section: 0.14 mm² ... 0.34 mm²	DOS-1204-WZ	6048264
	<ul style="list-style-type: none">Connection type head A: Male connector, RJ45, 4-pin, straightConnection type head B: Male connector, M12, 4-pin, angled, D-codedSignal type: Ethernet, PROFINETCable: 30 m, 4-wire, CAT5, CAT5e, PVCDescription: Ethernet, shieldedPROFINET	SSL-2J04-F30MZ	6059450
	<ul style="list-style-type: none">Connection type head A: Male connector, RJ45, 4-pin, straightSignal type: Ethernet, PROFINETCable: CAT5, CAT5eDescription: Ethernet, shieldedPROFINETConnection systems: IDC quick connectionPermitted cross-section: 4 mm² ... 8 mm²	STE-0J04-GZ	6048260
	<ul style="list-style-type: none">Connection type head A: Male connector, M12, 4-pin, straight, D-codedSignal type: PROFINETCable: CAT5, CAT5eDescription: PROFINET, shieldedConnection systems: IDC quick connectionPermitted cross-section: 0.14 mm² ... 0.34 mm²	STE-1204-GZ	6048261
	<ul style="list-style-type: none">Connection type head A: Male connector, M12, 4-pin, angled, D-codedSignal type: PROFINETCable: CAT5, CAT5eDescription: PROFINET, shieldedConnection systems: IDC quick connectionPermitted cross-section: 0.14 mm² ... 0.34 mm²	STE-1204-WZ	6048262
	<ul style="list-style-type: none">Connection type head A: Female connector, M12, 4-pin, straight, A-codedConnection type head B: Flying leadsSignal type: Sensor/actuator cableCable: 2 m, 4-wire, PUR, halogen-freeDescription: Sensor/actuator cable, unshieldedApplication: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation	YF2A14-020UB3XLEAX	2095607
	<ul style="list-style-type: none">Connection type head A: Female connector, M12, 4-pin, straight, A-codedConnection type head B: Flying leadsSignal type: Sensor/actuator cableCable: 5 m, 4-wire, PUR, halogen-freeDescription: Sensor/actuator cable, unshieldedApplication: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation	YF2A14-050UB3XLEAX	2095608
	<ul style="list-style-type: none">Connection type head A: Female connector, M12, 4-pin, straight, A-codedConnection type head B: Flying leadsSignal type: Sensor/actuator cableCable: 10 m, 4-wire, PUR, halogen-freeDescription: Sensor/actuator cable, unshieldedApplication: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation	YF2A14-100UB3XLEAX	2095609
	<ul style="list-style-type: none">Connection type head A: Female connector, M12, 4-pin, straight, A-codedConnection type head B: Flying leadsSignal type: Sensor/actuator cableCable: 25 m, 4-wire, PUR, halogen-freeDescription: Sensor/actuator cable, unshieldedApplication: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation	YF2A14-250UB3XLEAX	2095615
	<ul style="list-style-type: none">Connection type head A: Female connector, M12, 4-pin, angled, A-codedConnection type head B: Flying leadsSignal type: Sensor/actuator cableCable: 2 m, 4-wire, PUR, halogen-freeDescription: Sensor/actuator cable, unshielded	YG2A14-020UB3XLEAX	2095766

	Brief description	Type	part no.
	<ul style="list-style-type: none"> Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation Connection type head A: Female connector, M12, 4-pin, angled, A-coded Connection type head B: Flying leads Signal type: Sensor/actuator cable Cable: 5 m, 4-wire, PUR, halogen-free Description: Sensor/actuator cable, unshielded Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation 	YG2A14-050UB3XLEAX	2095767
	<ul style="list-style-type: none"> Connection type head A: Female connector, M12, 4-pin, angled, A-coded Connection type head B: Flying leads Signal type: Sensor/actuator cable Cable: 10 m, 4-wire, PUR, halogen-free Description: Sensor/actuator cable, unshielded Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation 	YG2A14-100UB3XLEAX	2095768
	<ul style="list-style-type: none"> Connection type head A: Female connector, M12, 4-pin, angled, A-coded Connection type head B: Flying leads Signal type: Sensor/actuator cable Cable: 25 m, 4-wire, PUR, halogen-free Description: Sensor/actuator cable, unshielded Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation 	YG2A14-250UB3XLEAX	2095771
	<ul style="list-style-type: none"> Connection type head A: Male connector, M12, 4-pin, straight, D-coded Connection type head B: Male connector, M12, 4-pin, straight, D-coded Signal type: Ethernet, PROFINET Cable: 2 m, 4-wire, PUR, halogen-free Description: Ethernet, shieldedPROFINET Application: Drag chain operation, Zones with oils and lubricants 	YM2D24-020P-N1M2D24	2106159
	<ul style="list-style-type: none"> Connection type head A: Male connector, M12, 4-pin, straight, D-coded Connection type head B: Male connector, RJ45, 4-pin, straight Signal type: Ethernet, PROFINET Cable: 2 m, 4-wire, PUR, halogen-free Description: Ethernet, shieldedPROFINET Application: Drag chain operation, Zones with oils and lubricants 	YM2D24-020P-N1MRJA4	2106182
	<ul style="list-style-type: none"> Connection type head A: Male connector, M12, 4-pin, straight, D-coded Connection type head B: Male connector, M12, 4-pin, angled, D-coded Signal type: Ethernet, PROFINET Cable: 2 m, 4-wire, PUR, halogen-free Description: Ethernet, shieldedPROFINET Application: Drag chain operation, Zones with oils and lubricants 	YM2D24-020P-N1N2D24	2106165
	<ul style="list-style-type: none"> Connection type head A: Male connector, M12, 4-pin, straight, D-coded Connection type head B: Flying leads Signal type: Ethernet, PROFINET Cable: 2 m, 4-wire, PUR, halogen-free Description: Ethernet, shieldedPROFINET Application: Drag chain operation, Zones with oils and lubricants 	YM2D24-020P-N1XLEAX	2106171
	<ul style="list-style-type: none"> Connection type head A: Male connector, M12, 4-pin, straight, D-coded Connection type head B: Male connector, M12, 4-pin, straight, D-coded Signal type: Ethernet, PROFINET Cable: 5 m, 4-wire, PUR, halogen-free Description: Ethernet, shieldedPROFINET Application: Drag chain operation, Zones with oils and lubricants 	YM2D24-050P-N1M2D24	2106160
	<ul style="list-style-type: none"> Connection type head A: Male connector, M12, 4-pin, straight, D-coded Connection type head B: Male connector, M12, 4-pin, angled, D-coded Signal type: Ethernet, PROFINET Cable: 5 m, 4-wire, PUR, halogen-free Description: Ethernet, shieldedPROFINET Application: Drag chain operation, Zones with oils and lubricants 	YM2D24-050P-N1N2D24	2106166
	<ul style="list-style-type: none"> Connection type head A: Male connector, M12, 4-pin, straight, D-coded Connection type head B: Flying leads Signal type: Ethernet, PROFINET Cable: 5 m, 4-wire, PUR, halogen-free Description: Ethernet, shieldedPROFINET Application: Drag chain operation, Zones with oils and lubricants 	YM2D24-050P-N1XLEAX	2106172
	<ul style="list-style-type: none"> Connection type head A: Male connector, M12, 4-pin, straight, D-coded Connection type head B: Male connector, M12, 4-pin, straight, D-coded Signal type: Ethernet, PROFINET Cable: 10 m, 4-wire, PUR, halogen-free Description: Ethernet, shieldedPROFINET 	YM2D24-100P-N1M2D24	2106161

	Brief description	Type	part no.
	<ul style="list-style-type: none">Application: Drag chain operation, Zones with oils and lubricantsConnection type head A: Male connector, M12, 4-pin, straight, D-codedConnection type head B: Male connector, RJ45, 4-pin, straightSignal type: Ethernet, PROFINETCable: 10 m, 4-wire, PUR, halogen-freeDescription: Ethernet, shieldedPROFINETApplication: Drag chain operation, Zones with oils and lubricants	YM2D24-100P-N1MRJA4	2106185
	<ul style="list-style-type: none">Connection type head A: Male connector, M12, 4-pin, straight, D-codedConnection type head B: Male connector, M12, 4-pin, angled, D-codedSignal type: Ethernet, PROFINETCable: 10 m, 4-wire, PUR, halogen-freeDescription: Ethernet, shieldedPROFINETApplication: Drag chain operation, Zones with oils and lubricants	YM2D24-100P-N1N2D24	2106167
	<ul style="list-style-type: none">Connection type head A: Male connector, M12, 4-pin, straight, D-codedConnection type head B: Flying leadsSignal type: Ethernet, PROFINETCable: 10 m, 4-wire, PUR, halogen-freeDescription: Ethernet, shieldedPROFINETApplication: Drag chain operation, Zones with oils and lubricants	YM2D24-100P-N1XLEAX	2106173
	<ul style="list-style-type: none">Connection type head A: Male connector, M12, 4-pin, angled, D-codedConnection type head B: Male connector, RJ45, 4-pin, straightSignal type: Ethernet, PROFINETCable: 2 m, 4-wire, PUR, halogen-freeDescription: Ethernet, shieldedPROFINETApplication: Drag chain operation, Zones with oils and lubricants	YN2D24-020P-N1MRJA4	2106162
	<ul style="list-style-type: none">Connection type head A: Male connector, M12, 4-pin, angled, D-codedConnection type head B: Male connector, M12, 4-pin, angled, D-codedSignal type: Ethernet, PROFINETCable: 2 m, 4-wire, PUR, halogen-freeDescription: Ethernet, shieldedPROFINETApplication: Drag chain operation, Zones with oils and lubricants	YN2D24-020P-N1N2D24	2106168
	<ul style="list-style-type: none">Connection type head A: Male connector, M12, 4-pin, angled, D-codedConnection type head B: Flying leadsSignal type: Ethernet, PROFINETCable: 2 m, 4-wire, PUR, halogen-freeDescription: Ethernet, shieldedPROFINETApplication: Drag chain operation, Zones with oils and lubricants	YN2D24-020P-N1XLEAX	2106174
	<ul style="list-style-type: none">Connection type head A: Male connector, M12, 4-pin, angled, D-codedConnection type head B: Male connector, RJ45, 4-pin, straightSignal type: Ethernet, PROFINETCable: 3 m, 4-wire, PUR, halogen-freeDescription: Ethernet, shieldedPROFINETApplication: Drag chain operation, Zones with oils and lubricants	YN2D24-030P-N1MRJA4	2144265
	<ul style="list-style-type: none">Connection type head A: Male connector, M12, 4-pin, angled, D-codedConnection type head B: Male connector, RJ45, 4-pin, straightSignal type: Ethernet, PROFINETCable: 5 m, 4-wire, PUR, halogen-freeDescription: Ethernet, shieldedPROFINETApplication: Drag chain operation, Zones with oils and lubricants	YN2D24-050P-N1MRJA4	2106163
	<ul style="list-style-type: none">Connection type head A: Male connector, M12, 4-pin, angled, D-codedConnection type head B: Flying leadsSignal type: Ethernet, PROFINETCable: 5 m, 4-wire, PUR, halogen-freeDescription: Ethernet, shieldedPROFINETApplication: Drag chain operation, Zones with oils and lubricants	YN2D24-050P-N1XLEAX	2106175
	<ul style="list-style-type: none">Connection type head A: Male connector, M12, 4-pin, angled, D-codedConnection type head B: Male connector, RJ45, 4-pin, straightSignal type: Ethernet, PROFINETCable: 10 m, 4-wire, PUR, halogen-freeDescription: Ethernet, shieldedPROFINETApplication: Drag chain operation, Zones with oils and lubricants	YN2D24-100P-N1MRJA4	2106164
	<ul style="list-style-type: none">Connection type head A: Male connector, M12, 4-pin, angled, D-codedConnection type head B: Male connector, M12, 4-pin, angled, D-codedSignal type: Ethernet, PROFINETCable: 10 m, 4-wire, PUR, halogen-freeDescription: Ethernet, shieldedPROFINETApplication: Drag chain operation, Zones with oils and lubricants	YN2D24-100P-N1N2D24	2106170

	Brief description	Type	part no.
	<ul style="list-style-type: none"> Application: Drag chain operation, Zones with oils and lubricants Connection type head A: Male connector, M12, 4-pin, angled, D-coded Connection type head B: Flying leads Signal type: Ethernet, PROFINET Cable: 10 m, 4-wire, PUR, halogen-free Description: Ethernet, shieldedPROFINET Application: Drag chain operation, Zones with oils and lubricants 	YN2D24-100P-N1XLEAX	2106176
	<ul style="list-style-type: none"> Connection type head A: Male connector, M12, 4-pin, angled, D-coded Connection type head B: Flying leads Signal type: Ethernet, PROFINET Cable: 25 m, 4-wire, PUR, halogen-free Description: Ethernet, shieldedPROFINET Application: Drag chain operation, Zones with oils and lubricants 	YN2D24-250P-N1XLEAX	2106180
	<ul style="list-style-type: none"> Connection type head A: Female connector, M12, 4-pin, angled, A-coded Description: Unshielded Connection systems: Screw-type terminals Permitted cross-section: ≤ 0.75 mm² 	DOS-1204-W	6007303
	<ul style="list-style-type: none"> Connection type head A: Female connector, M12, 4-pin, D-coded Connection type head B: Female connector, RJ45, 8-pin Signal type: Ethernet Cable: CAT5, CAT5e Description: Ethernet, shielded Note: Cabinet through 	Feedthrough female connector Ethernet RJ45	6048180
	<ul style="list-style-type: none"> Connection type head A: Female connector, M12, 4-pin, straight, A-coded Connection type head B: Flying leads Signal type: Sensor/actuator cable Cable: 0.6 m, 4-wire, PUR, halogen-free Description: Sensor/actuator cable, unshielded Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation 	YF2A14-C60UB3XLEAX	2145654
	<ul style="list-style-type: none"> Connection type head A: Female connector, M12, 4-pin, straight, A-coded Connection type head B: Flying leads Signal type: Sensor/actuator cable Cable: 1 m, 4-wire, PUR, halogen-free Description: Sensor/actuator cable, unshielded Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation 	YF2A14-010UB3XLEAX	2145655
	<ul style="list-style-type: none"> Connection type head A: Female connector, M12, 4-pin, straight, A-coded Connection type head B: Flying leads Signal type: Sensor/actuator cable Cable: 3 m, 4-wire, PUR, halogen-free Description: Sensor/actuator cable, unshielded Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation 	YF2A14-030UB3XLEAX	2145656
	<ul style="list-style-type: none"> Connection type head A: Female connector, M12, 4-pin, angled, A-coded Connection type head B: Flying leads Signal type: Sensor/actuator cable Cable: 0.6 m, 4-wire, PUR, halogen-free Description: Sensor/actuator cable, unshielded Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation 	YF2A14-C60UB3XLEAX	2145657
	<ul style="list-style-type: none"> Connection type head A: Female connector, M12, 4-pin, angled, A-coded Connection type head B: Flying leads Signal type: Sensor/actuator cable Cable: 1 m, 4-wire, PUR, halogen-free Description: Sensor/actuator cable, unshielded Application: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation 	YF2A14-010UB3XLEAX	2145658
	<ul style="list-style-type: none"> Connection type head A: Male connector, M12, 4-pin, angled, D-coded Connection type head B: Male connector, M12, 4-pin, angled, D-coded Signal type: Ethernet, PROFINET Cable: 5 m, 4-wire, PUR, halogen-free Description: Ethernet, shieldedPROFINET Application: Drag chain operation, Zones with oils and lubricants 	YN2D24-050P-N1N2D24	2127662
	<ul style="list-style-type: none"> Connection type head A: Male connector, M12, 4-pin, straight, D-coded Connection type head B: Male connector, RJ45, 4-pin, straight Signal type: Ethernet, PROFINET Cable: 5 m, 4-wire, PUR, halogen-free Description: Ethernet, shieldedPROFINET 	YM2D24-050P-N1MRJA4	2106184

	Brief description	Type	part no.
	<ul style="list-style-type: none">Application: Drag chain operation, Zones with oils and lubricantsConnection type head A: Female connector, M12, 4-pin, angled, A-codedConnection type head B: Flying leadsSignal type: Sensor/actuator cableCable: 20 m, 4-wire, PUR, halogen-freeDescription: Sensor/actuator cable, unshieldedApplication: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation	YG2A14-200UB3XLEAX	2095770
	<ul style="list-style-type: none">Connection type head A: Female connector, M12, 4-pin, straight, A-codedConnection type head B: Flying leadsSignal type: Sensor/actuator cableCable: 20 m, 4-wire, PUR, halogen-freeDescription: Sensor/actuator cable, unshieldedApplication: Uncontaminated zones, Zones with oils and lubricants, Robot, Drag chain operation	YF2A14-200UB3XLEAX	2095611

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

WORLDWIDE PRESENCE:

Contacts and other locations www.sick.com