



OLS20-UB1114340

OLS

CONTRAST SENSORS

SICK
Sensor Intelligence.



Ordering information

| Type | part no. |
|-----------------|----------|
| OLS20-UB1114340 | 1118557 |

Other models and accessories → www.sick.com/OLS

Illustration may differ



Detailed technical data

Features

| | |
|-----------------------------------|-------------------------------|
| Dimensions (W x H x D) | 31 mm x 62 mm x 52.5 mm |
| Sensing distance | ≤ 100 mm |
| Sensing distance tolerance | ± 10 mm |
| Housing design | Rectangular |
| Working range | 90 mm ... 110 mm |
| Light source | LED, UV ¹⁾ |
| Wave length | 385 nm |
| Light spot size | 180 mm x 9 mm ²⁾ |
| Receiving filters | 420 ... 750 |
| Bar code types | 2/5 Interleaved with checksum |
| Module width (min.) | ≥ 1.5 mm |
| Line radius (min.) | ≥ 0.5 m |
| Track color | Orange, green, yellow |
| Safety-related parameters | |
| MTTF _D | 271 years |

¹⁾ Average service life: 100,000 h at T_U = +25 °C.

²⁾ Field of view line +90mm, field of view code +50mm.

Interfaces

| | |
|-----------------------|-------------------------|
| IO-Link | ✓, COM3 (230,4 kBaud) |
| Cycle time | 5 ms |
| Process data length | 21 Byte Process Data In |
| CANopen | ✓ |
| Digital output | Q ₁ |
| Number | 1 |

Electronics

| | |
|--|--|
| Supply voltage | 18 V DC ... 30 V DC ¹⁾ |
| Ripple | ≤ 5 V _{pp} ²⁾ |
| Power consumption | < 3 W ³⁾ |
| Sampling rate | 10 ms |
| Accuracy optical center | ± 1 mm |
| Switching output | Push-pull: PNP/NPN |
| Switching output (voltage) | Push-pull: PNP/NPN HIGH = U _V - 3 V/LOW ≤ 3 V |
| Output current I_{max.} | < 100 mA |
| Protection class | III |
| Circuit protection | U _V connections, reverse polarity protected Output Q short-circuit protected Interference pulse suppression |
| Enclosure rating | IP67 |
| LED risk group | 2 (IEC 62471) |

¹⁾ Limit values when operated in short-circuit protected network: max. 8 A.

²⁾ May not fall below or exceed U_V tolerances.

³⁾ Without load.

Mechanics

| | |
|-------------------------|------------------|
| Housing material | Zinc diecast |
| Connection type | Plug, M12, 5-pin |
| Weight | 250 g |

Ambient data

| | |
|--------------------------------------|------------------------------|
| Ambient operating temperature | -10 °C ... +55 °C |
| Ambient temperature, storage | -25 °C ... +75 °C |
| Ambient light immunity | 50,000 lx |
| Shock load | According to IEC 60068 |
| UL File No. | NRKH.E181493 & NRKH7.E181493 |

Certificates


| | |
|---|---|
| EU declaration of conformity | ✓ |
| UK declaration of conformity | ✓ |
| ACMA declaration of conformity | ✓ |
| Moroccan declaration of conformity | ✓ |
| China-RoHS | ✓ |

| | |
|--|---|
| cULus certificate | ✓ |
| IO-Link | ✓ |
| CANopen certificate | ✓ |
| Photobiological safety (IEC EN 62471) | ✓ |

Classifications

| | |
|-----------------------|----------|
| ECLASS 5.0 | 27270906 |
| ECLASS 5.1.4 | 27270906 |
| ECLASS 6.0 | 27270906 |
| ECLASS 6.2 | 27270906 |
| ECLASS 7.0 | 27270906 |
| ECLASS 8.0 | 27270906 |
| ECLASS 8.1 | 27270906 |
| ECLASS 9.0 | 27270906 |
| ECLASS 10.0 | 27270906 |
| ECLASS 11.0 | 27270906 |
| ECLASS 12.0 | 27270906 |
| ETIM 5.0 | EC001820 |
| ETIM 6.0 | EC001820 |
| ETIM 7.0 | EC001820 |
| ETIM 8.0 | EC001820 |
| UNSPSC 16.0901 | 39121528 |


Dimensional drawing

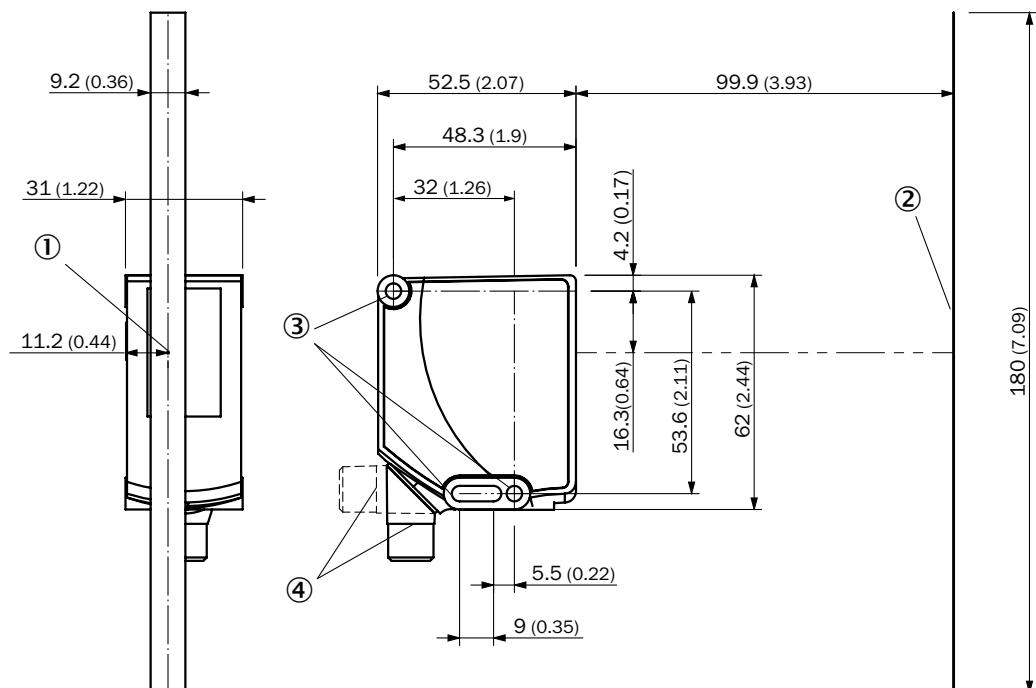

Dimensions in mm (inch)


- ① Optical axis
- ② Field of view
- ③ Mounting hole, Ø 4.1 mm
- ④ Connector M12 (rotatable up to 180°)

Adjustments

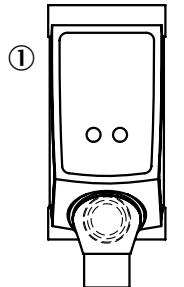

① Indicator lamps

Connection diagram Cd-422



Recommended accessories

Other models and accessories → www.sick.com/OLS

| | Brief description | Type | part no. |
|---|--|---------------------------------|----------|
| Codes | | | |
|  | <ul style="list-style-type: none"> Product family: Positioning codes Description: 1D bar codes in 2/5 interleaved format with 3 digits plus checksum, set of 108 bar codes, 12 A4 sheets of 9 bar codes each, luminescent PVC base material with protective film, codes 0001 ... 0108, neon orange | BARCODE 7510-038-0001-0108-N | 5343612 |
|  | <ul style="list-style-type: none"> Product family: Positioning codes Description: 1D bar codes in 2/5 interleaved format with 3 digits plus checksum, set of 108 bar codes, 12 A4 sheets of 9 bar codes each, luminescent PVC base material with protective film, codes 0109 ... 0216, neon orange | BARCODE 7510-038-0109-0216-N | 5343613 |
|  | <ul style="list-style-type: none"> Product family: Positioning codes Description: 1D bar codes in 2/5 interleaved format, set of 108 bar codes, 9 A4 sheets of 12 bar codes each, luminescent PVC base material with protective film, codes 0001 ... 0108, neon orange | BARCODE 7510-038-0001-0108 | 5338408 |
|  | <ul style="list-style-type: none"> Product family: Positioning codes Description: Luminescent duct tape for easy application to all types of flooring, width 2.5 cm, length 25 m, neon orange | ADHESIVE TAPE, FABRIC | 5337868 |
|  | <ul style="list-style-type: none"> Product family: Positioning codes Description: Luminescent rugged PVC adhesive tape for easy application to all types of flooring, width 2 cm, length 25 m, neon orange | TAPE 7510-038-20-25 | 5338378 |
|  | <ul style="list-style-type: none"> Product family: Positioning codes Description: Scope of delivery: 1 x 90° arc, luminescent rugged PVC adhesive tape, prepared as 90° arc with a radius of 1,000 mm, neon orange | TAPE 7510-038-1000 | 5338388 |
|  | <ul style="list-style-type: none"> Product family: Positioning codes Description: Scope of delivery: 1 x 90° arc: luminescent rugged PVC adhesive tape, prepared as 90° arc with a radius of 500 mm, neon orange | TAPE 7510-038-500 | 5338387 |
|  | <ul style="list-style-type: none"> Product family: Positioning codes Description: Protective film for adhesive tape, slip resistance class R10, protection against abrasion and moisture, width 3,5 cm, length 50 m | TAPE 250AS-35-50 | 5338386 |
|  | <ul style="list-style-type: none"> Product family: Positioning codes Description: Scope of delivery: 1 x 90° sheet: luminescent rugged PVC adhesive tape, prepared as 90° arc with a radius of 1,000 mm, neon green | TAPE 7510-069-1000 | 5346006 |
|  | <ul style="list-style-type: none"> Product family: Positioning codes Description: Scope of delivery: 1 x 90° sheet: luminescent rugged PVC adhesive tape, prepared as 90° arc with a radius of 500 mm, neon green | TAPE 7510-069-500 | 5346005 |
|  | <ul style="list-style-type: none"> Product family: Positioning codes Description: Scope of delivery: 1 x 90° arc: luminescent rugged PVC adhesive tape, prepared as 90° arc with a radius of 1,000 mm, neon yellow | TAPE 7510-029-1000 | 5346008 |
|  | <ul style="list-style-type: none"> Product family: Positioning codes | TAPE 7510-029-500 | 5346007 |

| | Brief description | Type | part no. |
|---|---|-------------------------------|-----------------|
| | <ul style="list-style-type: none">Description: Scope of delivery: 1 x 90° sheet: luminescent rugged PVC adhesive tape, prepared as 90° arc with a radius of 500 mm, neon yellow | | |
|  | <ul style="list-style-type: none">Product family: Positioning codesDescription: Luminescent rugged PVC adhesive tape for easy application to all types of flooring, width 2 cm, length 25 m, neon green | TAPE 7510-069-20-25 | 5346003 |
|  | <ul style="list-style-type: none">Product family: Positioning codesDescription: Luminescent rugged PVC adhesive tape for easy application to all types of flooring, width 2 cm, length 25 m, neon yellow | TAPE 7510-029-20-25 | 5346004 |
|  | <ul style="list-style-type: none">Product family: Positioning codesDescription: 1D barcodes in 2/5 interleaved format, set of 108 barcodes, 9 A4 sheets of 12 barcodes each, luminescent PVC base material with protective film, codes 0109 ... 0218, neon orange. Supplement (subsequent codes) for https://www.sick.com/5338408 | BARCODE 7510-038-0109-0218 | 5342395 |

Mounting systems

| | | | |
|--|---|-------------|---------|
|  | <ul style="list-style-type: none">Description: Plate N04 for universal clamp, steelMaterial: Steel, zinc diecastDetails: Zinc plated steel (sheet), Zinc die cast (clamping bracket)Items supplied: Universal clamp (5322626), mounting hardwareUsable for: Dx50, UC12, W12G, W14-2, W18-2, W23, W280, W11-2, W12-3, W12-2 Laser, W12 Teflon, W16, W18-3, W23-2, W24-2, W24-2 Ex, W26, W27-2 Laser, W27-2, W27-3, W34, W260, W280-2, PowerProx, Reflex Array, W11G-2, W18-3 Ex, W27-3 Ex | BEF-KHS-N04 | 2051610 |
|--|---|-------------|---------|

network devices

| | | | |
|---|--|-----------------------------------|---------|
|  | | IOLA2US-01101 (SiLink2 Master) | 1061790 |
|---|--|-----------------------------------|---------|

connectors and cables

| | | | |
|---|--|--------------------|---------|
|  | <ul style="list-style-type: none">Connection type head A: Male connector, M12, 5-pin, straight, A-codedDescription: UnshieldedConnection systems: Screw-type terminalsPermitted cross-section: ≤ 0.75 mm²Note: For field bus technology | STE-1205-G | 6022083 |
|  | <ul style="list-style-type: none">Connection type head A: Female connector, M12, 5-pin, straight, A-codedConnection type head B: Flying leadsSignal type: Sensor/actuator cableCable: 5 m, 5-wire, PVCDescription: Sensor/actuator cable, unshieldedApplication: Zones with chemicals, Uncontaminated zones | YF2A15-050VB5XLEAX | 2096240 |

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

WORLDWIDE PRESENCE:

Contacts and other locations www.sick.com