



WL12GC-3P2472A91

W12

PHOTOELECTRIC SENSORS

SICK
Sensor Intelligence.



Illustration may differ

Ordering information

| Type | part no. |
|------------------|----------|
| WL12GC-3P2472A91 | 1061063 |

Other models and accessories → www.sick.com/W12

Detailed technical data

Features

| | | |
|------------------------------------|---|----------------------------|
| Functional principle | Photoelectric retro-reflective sensor | |
| Functional principle detail | Without reflector minimum distance (autocollimation/coaxial optics) | |
| Sensing range max. | 0 m ... 4 m | |
| Sensing range | 0 m ... 4 m ¹⁾ | |
| Polarisation filters | Yes | |
| Emitted beam | Light source | PinPoint LED ²⁾ |
| | | Visible red light |
| | | Ø 25 mm (1.5 m) |
| Key LED figures | Wave length | 660 nm |
| Adjustment | IO-Link, Single teach-in button | |
| Special applications | Detecting transparent objects | |
| Pin 2 configuration | External input, Teach-in input, Sender off input, Detection output, logic output, Device contamination alarm output | |
| AutoAdapt | ✓ | |

¹⁾ Reflector PL80A.²⁾ Average service life: 100,000 h at T_U = +25 °C.

Safety-related parameters

| | |
|-------------------------------------|-----------|
| MTTF_D | 891 years |
| DC_{avg} | 0 % |
| T_M (mission time) | 20 years |

Communication interface

| | |
|------------------------|--|
| IO-Link | ✓, COM2 (38,4 kBaud) |
| Data transmission rate | COM2 (38,4 kBaud) |
| Cycle time | 2.3 ms |
| Process data length | 16 Bit |
| Process data structure | Bit 0 = switching signal Q _{L1} Bit 1 = switching signal Q _{L2} Bit 2 ... 15 = measuring value |
| VendorID | 26 |
| DeviceID HEX | 0x8000F5 |
| DeviceID DEC | 8388853 |

Electronics

| | |
|-------------------------------------|--|
| Supply voltage U_B | 10 V DC ... 30 V DC ¹⁾ |
| Ripple | < 5 V _{pp} ²⁾ |
| Current consumption | 30 mA ³⁾ |
| Protection class | III |
| Digital output | |
| Type | PNP ⁴⁾ |
| Switching mode | Light/dark switching |
| Signal voltage PNP HIGH/LOW | Approx. V _S - 2.5 V / 0 V |
| Output current I _{max.} | ≤ 100 mA |
| Repeatability (response time) | 100 µs ⁵⁾ |
| Switching frequency | 1,500 Hz |
| Attenuation along light beam | > 8 % |
| Circuit protection | A ⁶⁾ B ⁷⁾ C ⁸⁾ D ⁹⁾ |
| Response time Q/ on Pin 2 | 200 µs ... 300 µs ^{10) 5)} |

¹⁾ Limit values when operated in short-circuit protected network: max. 8 A.

²⁾ May not fall below or exceed U_V tolerances.

³⁾ Without load.

⁴⁾ Pin 4: This switching output must not be connected to another output.

⁵⁾ Valid for Q \ on Pin2, if configured with software.

⁶⁾ A = V_S connections reverse-polarity protected.

⁷⁾ B = inputs and output reverse-polarity protected.

⁸⁾ C = interference suppression.

⁹⁾ D = outputs overcurrent and short-circuit protected.

¹⁰⁾ Signal transit time with resistive load.

¹¹⁾ With light / dark ratio 1:1, valid for Q \ on Pin2, if configured with software.

| | |
|---|-------------------------------|
| Switching frequency Q / to pin 2 | ≤ 1,500 Hz ¹¹⁾ |
| Special feature | Detecting transparent objects |

¹⁾ Limit values when operated in short-circuit protected network: max. 8 A.

²⁾ May not fall below or exceed U_Y tolerances.

³⁾ Without load.

⁴⁾ Pin 4: This switching output must not be connected to another output.

⁵⁾ Valid for Q \ on Pin2, if configured with software.

⁶⁾ A = V_S connections reverse-polarity protected.

⁷⁾ B = inputs and output reverse-polarity protected.

⁸⁾ C = interference suppression.

⁹⁾ D = outputs overcurrent and short-circuit protected.

¹⁰⁾ Signal transit time with resistive load.

¹¹⁾ With light / dark ratio 1:1, valid for Q \ on Pin2, if configured with software.

Mechanics

| | |
|-------------------------------|-----------------------------|
| Housing | Rectangular |
| Dimensions (W x H x D) | 15.6 mm x 48.5 mm x 42 mm |
| Connection | Male connector M12, 4-pin |
| Material | Housing Metal, zinc diecast |
| | Front screen Plastic, PMMA |
| Weight | 120 g |

Ambient data

| | |
|--------------------------------------|------------------------------|
| Enclosure rating | IP66 IP67 |
| Ambient operating temperature | -40 °C ... +60 °C |
| Ambient temperature, storage | -40 °C ... +75 °C |
| UL File No. | NRKH.E181493 & NRKH7.E181493 |

Smart Task

| | |
|------------------------|---|
| Smart Task name | Timestamp + debouncing |
| Logic function | Direct AND OR WINDOW Hysteresis |
| Timer function | Deactivated Switch-on delay Off delay ON and OFF delay Impulse (one shot) |
| Inverter | Yes |
| Response time | SIO Direct: 300 µs ... 450 µs ¹⁾ SIO Logic: 550 µs ... 650 µs ²⁾ IOL: — ³⁾ |
| Repeatability | SIO Direct: 150 µs ¹⁾ |

¹⁾ SIO Direct: sensor operation in standard I/O mode without IO-Link communication and without using internal sensor logic or time parameters (set to "direct"/"deactivated").

²⁾ SIO Logic: Sensor operation in standard I/O mode without IO-Link communication. Sensor-internal logic or timing parameters plus Automation Functions used.

³⁾ IOL: Sensor operation with full IO-Link communication and usage of logic, timing and Automation Function parameters.

| | |
|--|--|
| | SIO Logic: 150 μ s ²⁾ IOL: -- ³⁾ |
| Time stamp accuracy | SIO Direct: -- SIO Logic: -- IOL: - 90 ... + 90 μ s |
| Min. Time between two process events (switches) | SIO Direct: 450 μ s SIO Logic: 450 μ s IOL: 500 ms |
| Time stamp number buffer | SIO Direct: -- SIO Logic: -- IOL: 8 |
| Max. TimeStamp Range | SIO Direct: -- SIO Logic: -- IOL: 260 ms |
| Debounce time max. | SIO Direct: -- SIO Logic: 52 ms IOL: 52 ms |
| Switching signal | |
| Switching signal Q _{L1} | Switching output |
| Switching signal Q _{L2} | Switching output |
| Measuring value | Timestamp |

¹⁾ SIO Direct: sensor operation in standard I/O mode without IO-Link communication and without using internal sensor logic or time parameters (set to "direct"/"deactivated").

²⁾ SIO Logic: Sensor operation in standard I/O mode without IO-Link communication. Sensor-internal logic or timing parameters plus Automation Functions used.

³⁾ IOL: Sensor operation with full IO-Link communication and usage of logic, timing and Automation Function parameters.

Diagnosis

| | |
|-------------------------|----------------------------|
| Device status | Yes |
| Quality of teach | Yes |
| Quality of run | Yes, Contamination display |

Certificates


| | |
|--|---|
| EU declaration of conformity | ✓ |
| UK declaration of conformity | ✓ |
| ACMA declaration of conformity | ✓ |
| Moroccan declaration of conformity | ✓ |
| China-RoHS | ✓ |
| ECOLAB certificate | ✓ |
| cULus certificate | ✓ |
| IO-Link | ✓ |
| Photobiological safety (DIN EN 62471) certificate | ✓ |

Classifications

| | |
|---------------------|----------|
| ECLASS 5.0 | 27270902 |
| ECLASS 5.1.4 | 27270902 |
| ECLASS 6.0 | 27270902 |
| ECLASS 6.2 | 27270902 |
| ECLASS 7.0 | 27270902 |


| | |
|-----------------------|----------|
| ECLASS 8.0 | 27270902 |
| ECLASS 8.1 | 27270902 |
| ECLASS 9.0 | 27270902 |
| ECLASS 10.0 | 27270902 |
| ECLASS 11.0 | 27270902 |
| ECLASS 12.0 | 27270902 |
| ETIM 5.0 | EC002717 |
| ETIM 6.0 | EC002717 |
| ETIM 7.0 | EC002717 |
| ETIM 8.0 | EC002717 |
| UNSPSC 16.0901 | 39121528 |

Adjustments Teach-in

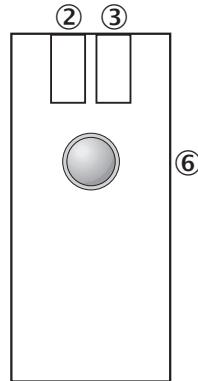


- ② LED indicator yellow: Status of received light beam
- ③ green LED indicator: power on, teach-in mode I
- ④ blue LED indicator: teach-in mode II
- ⑤ Single teach-in button,
- ⑥ function 1: teach-in sensitivity on reflector,
- ⑦ function 2: change operation/teach-in mode

Connection diagram Cd-367




Light spot size

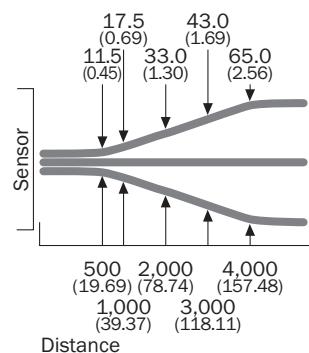

Distance

All dimensions in mm (inch)

Sensing range diagram WL12G-3

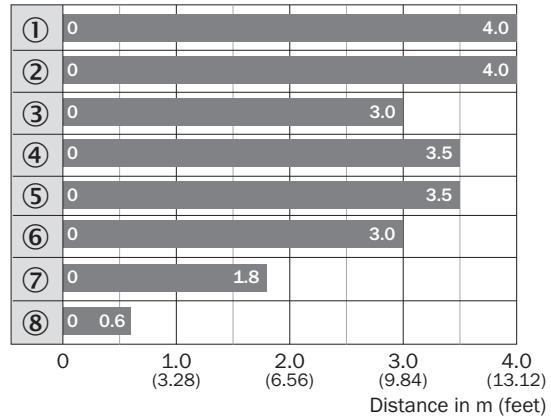


■ Sensing range max.

- ① Reflector PL80A
- ② Reflector C110A
- ③ Reflector P250F
- ④ Reflector PL50A
- ⑤ Reflector PL40A
- ⑥ Reflector PL30A
- ⑦ Reflector PL20A
- ⑧ Reflective tape REF-IRF-56

Functions

| Teach-in-Modus für Objekte / Teach-in mode for objects | Lichtdämpfung / Light damping | Objekttyp / Object type | Teach-in-Zeit / Teach-in time | Ext. Teach-in über Leitung / Ext. cable teach-in | Anzeige-LED / LED indicator |
|---|----------------------------------|---|----------------------------------|---|--------------------------------|
| I | 10 % | PET-Flasche / Folie / Glas / PET-Flasche / Folie / glass | 1 ... 5 s | 30 ... 100 ms | grün / green |
| II | 18 % | Farbglasflaschen / Colored glass bottles | 5 ... 10 s | 100 ... 200 ms | blau / blue |

Dimensional drawing

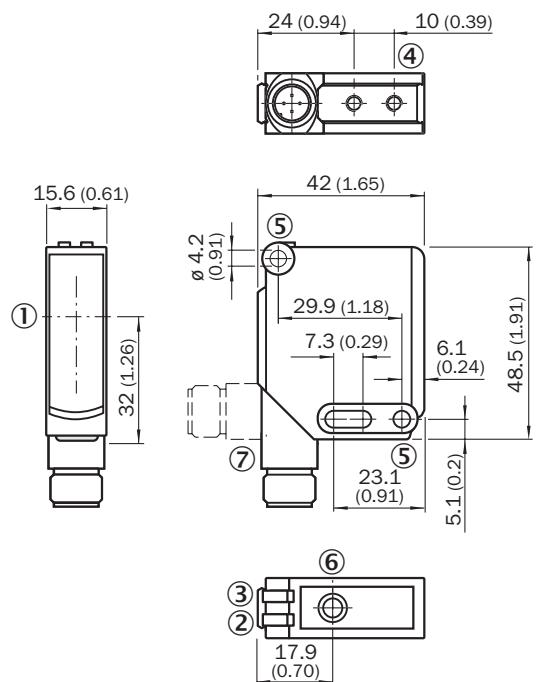

Dimensions in mm (inch)

- ① Optical axis
- ② LED indicator yellow: Status of received light beam
- ③ LED indicator green: Supply voltage active
- ④ M4 threaded mounting hole, 4 mm deep
- ⑤ Mounting hole, Ø 4.2 mm
- ⑥ Sensitivity setting: single teach-in button
- ⑦ Connection

Recommended accessories

Other models and accessories → www.sick.com/W12

| | Brief description | Type | part no. |
|---|--|-------------|----------|
| Mounting systems | | | |
|  | <ul style="list-style-type: none"> • Description: Universal mounting bracket for reflectors • Dimensions (W x H x L): 85 mm x 90 mm x 35 mm • Material: Steel • Details: Steel, zinc coated • Suitable for: C110A, P250, PL20, PL30A, PL40A, PL80A | BEF-WN-REFX | 2064574 |
| reflectors and optics | | | |
|  | <ul style="list-style-type: none"> • Description: Fine triple reflector, screw connection, suitable for laser sensors • Dimensions: 52 mm x 62 mm • Ambient operating temperature: -30 °C ... +65 °C | P250F | 5308843 |

| | Brief description | Type | part no. |
|---|--|--------------------|----------|
| connectors and cables | | | |
|  | <ul style="list-style-type: none">Connection type head A: Female connector, M12, 4-pin, straight, A-codedConnection type head B: Flying leadsSignal type: Sensor/actuator cableCable: 5 m, 4-wire, PVCDescription: Sensor/actuator cable, unshieldedApplication: Zones with chemicals, Uncontaminated zones | YF2A14-050VB3XLEAX | 2096235 |
|  | <ul style="list-style-type: none">Connection type head A: Male connector, M12, 4-pin, straight, A-codedDescription: UnshieldedConnection systems: Screw-type terminalsPermitted cross-section: $\leq 0.75 \text{ mm}^2$ | STE-1204-G | 6009932 |

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

WORLDWIDE PRESENCE:

Contacts and other locations www.sick.com