



**WTB16I-24811X20ZZZ**

W16

**PHOTOELECTRIC SENSORS**

**SICK**  
Sensor Intelligence.




## Ordering information

| Type               | part no. |
|--------------------|----------|
| WTB16I-24811X20ZZZ | 1120337  |

Other models and accessories → [www.sick.com/W16](http://www.sick.com/W16)

Illustration may differ

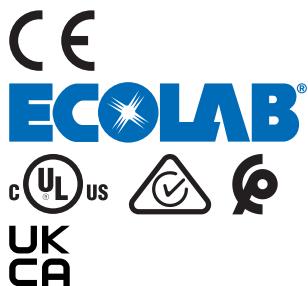

## Detailed technical data

## Features

|   |   |
|---|---|
| <b>Functional principle</b>   | Photoelectric proximity sensor  |
| <b>Functional principle detail</b>  | Background suppression  |
| <b>Sensing range</b>  |   |
| Sensing range min.  | 10 mm   |
| Sensing range max.  | 1,350 mm  |
| Adjustable switching threshold for background suppression                                       | 100 mm ... 1,350 mm   |
| Reference object  | Object with 90% remission factor (complies with standard white according to DIN 5033) |
| Minimum distance between set sensing range and background (black 6% / white 90%)                | 45 mm, at a distance of 400 mm  |
| Recommended sensing range for the best performance  | 100 mm ... 400 mm   |
| <b>Emitted beam</b>   |   |
| Light source  | LED   |
| Type of light   | Infrared light  |
| Shape of light spot   | Point-shaped  |
| Light spot size (distance)  | Ø 12 mm (800 mm)  |
| Maximum dispersion of the emitted beam around the standardized transmission axis (squint angle) | < +/- 1.0° (at Ta = +23 °C)   |
| <b>Key LED figures</b>  |   |
| Normative reference   | EN 62471:2008-09   IEC 62471:2006, modified   |

|                         |                        |  |
|-------------------------|------------------------|--|
|                         | LED risk group marking | Free group   |
|                         | Wave length            | 850 nm   |
|                         | Average service life   | 100,000 h at $T_a = +25^\circ\text{C}$   |
| <b>Adjustment</b>       |                        |  |
|                         | Teach-Turn adjustment  | BluePilot: For setting the sensing range   |
| <b>Display</b>          |                        |  |
|                         | LED blue               | BluePilot: sensing range indicator   |
|                         | LED green              | Operating indicatorStatic on: power on   |
|                         | LED yellow             | Status of received light beamStatic on: object presentStatic off: object not present |
| <b>Special features</b> |                        | Factory setting: sensing range 125 mm  |

## Safety-related parameters

|                                     |           |
|-------------------------------------|-----------|
| <b>MTTF<sub>D</sub></b>             | 626 years |
| <b>DC<sub>avg</sub></b>             | 0%        |
| <b>T<sub>M</sub> (mission time)</b> | 20 years  |

## Electronics

|                                     |   |
|-------------------------------------|---|
| <b>Supply voltage U<sub>B</sub></b> | 10 V DC ... 30 V DC <sup>1)</sup>                                     |
| <b>Ripple</b>                       | < 5 V <sub>pp</sub>   |
| <b>Current consumption</b>          | 30 mA   |
| <b>Protection class</b>             | III   |
| <b>Digital output</b>               |   |
| Number                              | 2 (Complementary)   |
| Type                                | PNP   |
| Switching mode                      | Light/dark switching  |
| Signal voltage PNP HIGH/LOW         | Approx. V <sub>S</sub> – 2.5 V / 0 V                                  |
| Output current I <sub>max.</sub>    | ≤ 100 mA  |
| Response time                       | ≤ 330 µs  |
| Switching frequency                 | 1,500 Hz  |
| <b>Pin/Wire assignment, sender</b>  |   |
| Function of pin 4/black (BK)        | Digital output, light switching, object present → output Q HIGH       |
| Function of pin 2/white (WH)        | Digital output, dark switching, object present → output $\bar{Q}$ LOW |

<sup>1)</sup> Limit values.

## Mechanics

|                               |                           |
|-------------------------------|---------------------------|
| <b>Housing</b>                | Rectangular               |
| <b>Dimensions (W x H x D)</b> | 20 mm x 55.7 mm x 42 mm   |
| <b>Connection</b>             | Male connector M12, 4-pin |
| <b>Material</b>               |                           |
| Housing                       | Plastic, VISTAL®          |
| Front screen                  | Plastic, PMMA             |
| <b>Weight</b>                 | 50 g                      |

## Ambient data

|                                      |   |
|--------------------------------------|---|
| <b>Enclosure rating</b>              | IP66 (EN 60529)<br>IP67 (EN 60529)<br>IP69 (EN 60529) <sup>1)</sup> |
| <b>Ambient operating temperature</b> | -40 °C ... +60 °C   |
| <b>Ambient temperature, storage</b>  | -40 °C ... +75 °C   |
| <b>UL File No.</b>                   | NRKH.E181493 & NRKH7.E181493  |

<sup>1)</sup> Replaces IP69K with ISO 20653: 2013-03.


## Classifications

|                       |          |
|-----------------------|----------|
| <b>ECLASS 5.0</b>     | 27270904 |
| <b>ECLASS 5.1.4</b>   | 27270904 |
| <b>ECLASS 6.0</b>     | 27270904 |
| <b>ECLASS 6.2</b>     | 27270904 |
| <b>ECLASS 7.0</b>     | 27270904 |
| <b>ECLASS 8.0</b>     | 27270904 |
| <b>ECLASS 8.1</b>     | 27270904 |
| <b>ECLASS 9.0</b>     | 27270904 |
| <b>ECLASS 10.0</b>    | 27270904 |
| <b>ECLASS 11.0</b>    | 27270904 |
| <b>ECLASS 12.0</b>    | 27270903 |
| <b>ETIM 5.0</b>       | EC002719 |
| <b>ETIM 6.0</b>       | EC002719 |
| <b>ETIM 7.0</b>       | EC002719 |
| <b>ETIM 8.0</b>       | EC002719 |
| <b>UNSPSC 16.0901</b> | 39121528 |

## Certificates

|  |   |
|--|---|
| <b>EU declaration of conformity</b>                      | ✓ |
| <b>UK declaration of conformity</b>                      | ✓ |
| <b>ACMA declaration of conformity</b>                    | ✓ |
| <b>Moroccan declaration of conformity</b>                | ✓ |
| <b>China-RoHS</b>  | ✓ |
| <b>ECOLAB certificate</b>                                | ✓ |
| <b>cULus certificate</b>                                 | ✓ |
| <b>Photobiological safety (DIN EN 62471) certificate</b> | ✓ |


Dimensional drawing, sensor

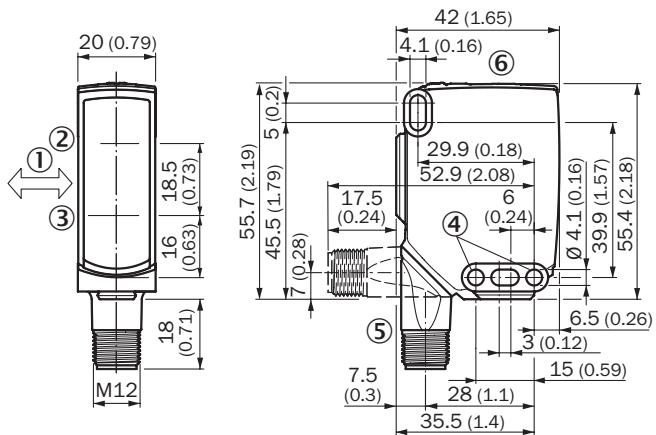

Dimensions in mm (inch)


- ① Standard direction of the material being detected
- ② Center of optical axis, sender
- ③ Center of optical axis, receiver
- ④ Mounting hole, Ø 4.1 mm
- ⑤ Connection
- ⑥ display and adjustment elements

display and adjustment elements




- ① LED indicator green
- ② LED indicator yellow
- ③ Teach-Turn adjustment
- ④ LED blue

Connection type M12 male connector, 4-pin



## Connection diagram Cd-083



## Truth table PNP - light switching Q

| Light switching Q (normally open) |                                 |                              |
|-----------------------------------|---------------------------------|------------------------------|
|                                   | Object not present → Output LOW | Object present → Output HIGH |
| Light receive                     | ✗                               | ✓                            |
| Light receive indicator           | ✗                               | ✗                            |
| Load resistance to M              | ✗                               | ✗                            |

+ (L+)

Q

- (M)

+ (L+)

Q


- (M)

Truth table PNP - dark switching  $\bar{Q}$ 


|                         | Dark switching $\bar{Q}$ (normally closed) |                             |
|-------------------------|--|-----------------------------|
|                         | Object not present → Output HIGH           | Object present → Output LOW |
| Light receive           | ✗  | ✓                           |
| Light receive indicator | ✗  | ✗                           |
| Load resistance to M    | ⚡  | ✗                           |
|                         |  |                             |

## Characteristic curve WTB16I-xxxxAxx

Minimum distance in mm (y) between the set sensing range and background (white, 90 %)

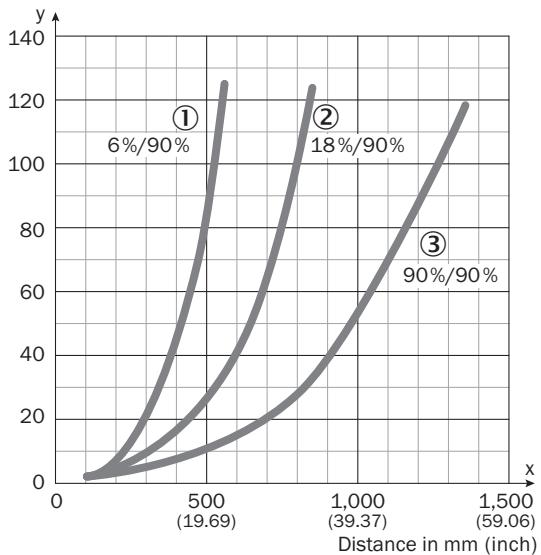



- ① Sensing range on black, 6% remission factor
- ② Sensing range on gray, 18% remission factor
- ③ Sensing range on white, 90% remission factor

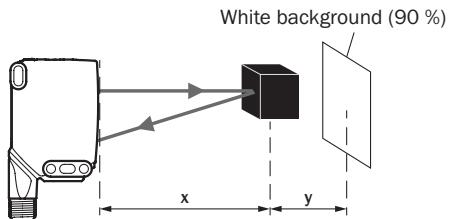

Example:  
Sensing range on black, 6 %,  
x = 400 mm, y = 45 mm


## Light spot size WTB16I-xxxx1xx, WTB16I-xxxxAxx

Dimensions in mm (inch)

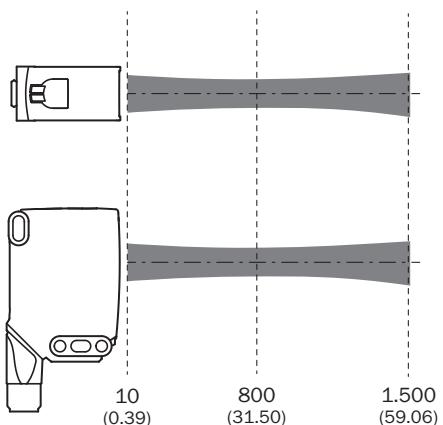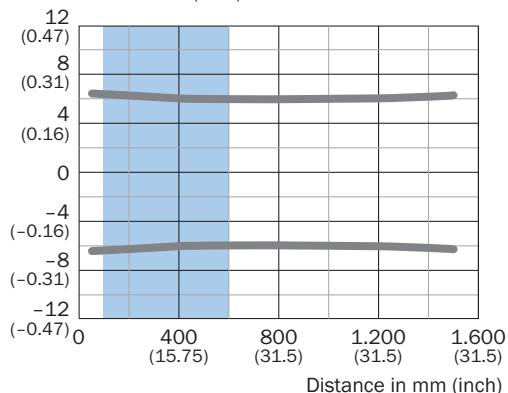

■ Recommended sensing range for the best performance

## Sensing range diagram WTB16I-xxxxAxx

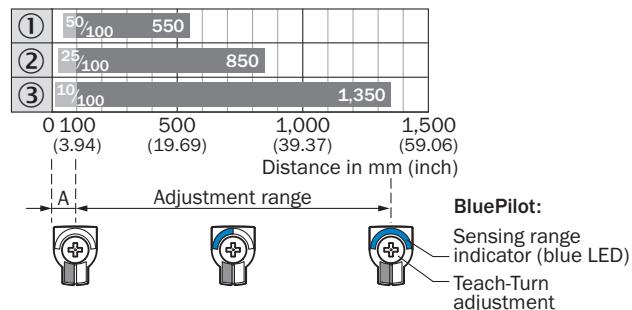

**BluePilot:**  
 Sensing range indicator (blue LED)  
 Teach-Turn adjustment

## Recommended accessories

Other models and accessories → [www.sick.com/W16](http://www.sick.com/W16)

|   | Brief description  | Type               | part no. |
|---|--|--------------------|----------|
| Mounting systems  |  |                    |          |
|  | <ul style="list-style-type: none"> <li><b>Description:</b> Plate N02 for universal clamp bracket</li> <li><b>Material:</b> Steel, zinc diecast</li> <li><b>Details:</b> Zinc plated steel (sheet), Zinc die cast (clamping bracket)</li> <li><b>Items supplied:</b> Universal clamp (5322626), mounting hardware</li> <li><b>Usable for:</b> W4S-3 Glass, W10, W4SLG-3, W4S-3 Inox, W4S-3 Inox Glass, W9, W11-2, W12-3, W12-2 Laser, W12G, W12 Teflon, W16, W250, W250-2, PowerProx, W11G-2, TranspaTect, WTT12, UC12, P250, G6 Inox, W4S, W4SL-3V, W4SLG-3V, W4SL-3H</li> </ul> | BEF-KHS-N02        | 2051608  |
|  | <ul style="list-style-type: none"> <li><b>Description:</b> Adapter for mounting W16 sensors in existing W14-2/W18-3 installations or L25 sensors in existing L28 installations</li> <li><b>Material:</b> Plastic</li> <li><b>Details:</b> Plastic</li> <li><b>Items supplied:</b> Fastening screws included</li> </ul>   | BEF-AP-W16         | 2095677  |
| connectors and cables   |  |                    |          |
|  | <ul style="list-style-type: none"> <li><b>Connection type head A:</b> Female connector, M12, 4-pin, straight, A-coded</li> <li><b>Connection type head B:</b> Flying leads</li> <li><b>Signal type:</b> Sensor/actuator cable</li> <li><b>Cable:</b> 5 m, 4-wire, PVC</li> <li><b>Description:</b> Sensor/actuator cable, unshielded</li> <li><b>Application:</b> Zones with chemicals, Uncontaminated zones</li> </ul>  | YF2A14-050VB3XLEAX | 2096235  |

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

**For us, that is "Sensor Intelligence."**

## WORLDWIDE PRESENCE:

Contacts and other locations [www.sick.com](http://www.sick.com)