



WTM12L-24161120A00

W12

PHOTOELECTRIC SENSORS

SICK
Sensor Intelligence.



Illustration may differ

Ordering information

Type	part no.
WTM12L-24161120A00	1125113

Other models and accessories → www.sick.com/W12

Detailed technical data

Features

Functional principle	Photoelectric proximity sensor
Functional principle detail	Background suppression, Foreground suppression, MultiMode, distance value
MultiMode	1 Background suppression 2 Foreground suppression 3 Two-point teach-in 4 Two independent switching points 5 Window 6 ApplicationSelect M manual / measurement
Sensing range	
Sensing range min.	80 mm (mode 1, 3, 4, 5) 0 mm (mode 2) 80 mm (mode 1 and 6 combined)
Sensing range max.	850 mm (mode 1, 3, 4, 5) 350 mm (mode 2) 1,200 mm (mode 1 and 6 combined)
Adjustable switching threshold for background suppression	90 mm ... 850 mm (mode 1, 3, 4, 5) 90 mm ... 1,200 mm (mode 1 and 6 combined)
Adjustable switching threshold for foreground suppression	100 mm ... 350 mm (mode 2)
Reference object	Object with 90% remission factor (complies with standard white according to DIN 5033)
Minimum distance between set sensing range and background (black 6% / white 90%)	6 mm, at a distance of 250 mm (mode 1, 3, 4, 5) 6 mm, at a distance of 650 mm (mode 1 and 6 combined)
Minimum object height at set sensing range in front of black background (6% remission factor)	2.2 mm, at a distance of 150 mm (mode 2)
Recommended sensing range for the best performance	100 mm ... 300 mm (mode 1, 3, 4, 5)

¹⁾ 90% remission factor.

²⁾ Equivalent to 1 σ.

³⁾ See repeatability characteristic lines.

	100 mm ... 200 mm (mode 2) 100 mm ... 700 mm (mode 1 and 6 combined)
Distance value	
Measuring range	100 mm ... 850 mm
Resolution	1 mm
Repeatability	0,1 mm ... 6 mm ^{1) 2) 3)}
Accuracy	Typ. 6.0 mm at 100 ... 200 mm distance ¹⁾ Typ. 12 mm at 200 ... 400 mm distance ¹⁾ Typ. 30 mm at 400 ... 800 mm distance ¹⁾
Distance value output	Via IO-Link
Update rate of the distance value	20 ms
Emitted beam	
Light source	Laser
Type of light	Visible red light
Shape of light spot	Ellipse shape
Light spot size (distance)	2.2 mm x 1.2 mm (300 mm)
Maximum dispersion of the emitted beam around the standardized transmission axis (squint angle)	< +/- 1.0° (at Ta = +23 °C)
Key laser figures	
Normative reference	EN 60825-1:2014, IEC 60825-1:2014
Laser class	1
Wave length	655 nm
Pulse duration	4 µs
Maximum pulse power	< 6.74 mW
Average service life	50,000 h at Tu = +25 °C
Smallest detectable object (MDO) typ.	
	2.5 mm (at a distance of 300 mm, mode 1, 3, 4, 5) 2.5 mm (at a distance of 200 mm, mode 2) 1.3 mm (at a distance of 650 mm, mode 1 and 6 combined) Object with 90% remission factor (complies with standard white according to DIN 5033)
Adjustment	
Teach-Turn adjustment	BluePilot: For adjusting the sensing range with mode selection
IO-Link	For configuring the sensor parameters and Smart Task functions
Display	
LED blue	BluePilot: Display of mode, display of output states QL1 (LED 3 permanently on) and QL2 (LED 5 permanently on)
LED green	Operating indicatorStatic on: power onFlashing: IO-Link mode
LED yellow	Status of received light beamStatic on: object presentStatic off: object not present
Special features	MultiMode

¹⁾ 90% remission factor.²⁾ Equivalent to 1 σ.³⁾ See repeatability characteristic lines.

Special applications	Detecting small objects, Detection of objects moving at high speeds, Detecting flat objects, Detecting uneven, shiny objects, Detection of poorly remitting and tilted objects, Detecting perforated objects
-----------------------------	--

¹⁾ 90% remission factor.

²⁾ Equivalent to 1 σ .

³⁾ See repeatability characteristic lines.

Safety-related parameters

MTTF_D	280 years
DC_{avg}	0 %
T_M (mission time)	10 years

Communication interface

IO-Link	✓, IO-Link V1.1
Data transmission rate	COM2 (38,4 kBaud)
Cycle time	2.3 ms
Process data length	16 Bit
Process data structure	Bit 0 = switching signal Q _{L1} Bit 1 = switching signal Q _{L2} Bit 2 ... 15 = Current receiver level (live)
VendorID	26
DeviceID HEX	0x8002CC
DeviceID DEC	8389324
Compatible master port type	A
SIO mode support	Yes

Electronics

Supply voltage U_B	10 V DC ... 30 V DC ¹⁾
Ripple	≤ 5 V
Usage category	DC-12 (According to EN 60947-5-2) DC-13 (According to EN 60947-5-2)
Current consumption	≤ 14 mA, without load. At U _B = 24 V
Protection class	III
Digital output	
Number	2 (Complementary)
Type	Push-pull: PNP/NPN
Switching mode	Light/dark switching
Signal voltage PNP HIGH/LOW	Approx. U _B -2.5 V / 0 V
Signal voltage NPN HIGH/LOW	Approx. U _B / < 2.5 V
Output current I _{max.}	≤ 100 mA
Circuit protection outputs	Reverse polarity protected Overcurrent protected

¹⁾ Limit values.

²⁾ Signal transit time with resistive load in switching mode.

³⁾ With light/dark ratio 1:1.

⁴⁾ This switching output must not be connected to another output.

	Response time	Short-circuit protected ≤ 500 µs (mode 1, 2, 3) ²⁾ ≤ 1,000 µs (mode 4, 5) ²⁾ ≤ 15 ms (mode 1 and 6 combined) ²⁾
	Repeatability (response time)	150 µs (mode 1, 2, 3) ²⁾ 350 µs (mode 4, 5) ²⁾ 5 ms (mode 1 and 6 combined) ²⁾
	Switching frequency	1,000 Hz (mode 1, 2, 3) ³⁾ 500 Hz (mode 4, 5) ³⁾ 30 Hz (mode 1 and 6 combined) ³⁾
Pin/Wire assignment		
	BN 1	+(L+)
	WH 2	QL1/MFDigital output, dark switching, object present → output QL1 LOW (Mode 1, 3, 5, 6) ⁴⁾ The pin 2 function of the sensor can be configured
		Digital output, light switching, object present → output QL1 LOW (Mode 2) ⁴⁾ Additional possible settings via IO-Link
		Digital output, light switching, object present → output QL2 HIGH (Mode 4) ⁴⁾
	BU 3	-(M)
	BK 4	QL1/CDigital output, light switching, object present → output QL1 HIGH (Mode 1, 3, 4, 5, 6) ⁴⁾ The pin 4 function of the sensor can be configured
		Digital output, dark switching, object present → output QL1 HIGH (Mode 2) ⁴⁾ Additional possible settings via IO-Link
		IO-Link communication C

¹⁾ Limit values.

²⁾ Signal transit time with resistive load in switching mode.

³⁾ With light/dark ratio 1:1.

⁴⁾ This switching output must not be connected to another output.

Mechanics

Housing	Rectangular
Dimensions (W x H x D)	15.6 mm x 49.5 mm x 43.1 mm
Connection	Male connector M12, 4-pin
Material	
Housing	Metal, zinc diecast
Front screen	Plastic, PMMA
Male connector	Plastic, VISTAL®
Weight	Approx. 77 g
Maximum tightening torque of the fixing screws	1.4 Nm

Ambient data

Enclosure rating	IP66 (EN 60529) IP67 (EN 60529) IP69 (EN 60529)
Ambient operating temperature	-20 °C ... +55 °C

Ambient temperature, storage	-40 °C ... +70 °C
Warm-up time	< 15 min, Where T_u is under -10 °C
Typ. Ambient light immunity	Artificial light: ≤ 50,000 lx Sunlight: ≤ 50,000 lx
Shock resistance	50 g, 11 ms (25 positive and 25 negative shocks along X, Y, Z axes, 150 total shocks (EN60068-2-27))
Vibration resistance	10 Hz ... 2,000 Hz (Amplitude 0.5 mm / 10 g, 20 sweeps per axis, for X, Y, Z axes, 1 octave/min, (EN60068-2-6))
Air humidity	35 % ... 95 %, relative humidity (no condensation)
Electromagnetic compatibility (EMC)	EN 60947-5-2
Resistance to cleaning agent	ECOLAB
UL File No.	NRKH.E181493 & NRKH7.E181493

Smart Task

Smart Task name	Base logics
Logic function	Direct AND OR
Timer function	Deactivated Switch-on delay Off delay ON and OFF delay Impulse (one shot)
Inverter	Yes
Switching frequency	SIO Logic: 900 Hz (mode 1, 2, 3) ¹⁾ SIO Logic: 450 Hz (mode 4, 5) ¹⁾ SIO Logic: 30 Hz (mode 1 and 6 combined) ¹⁾ IOL: 800 Hz (mode 1, 2, 3) ²⁾ IOL: 450 Hz (mode 4, 5) ²⁾ IOL: 30 Hz (mode 1 and 6 combined) ²⁾
Response time	Mode 1, 2, 3 ¹⁾ SIO Logic: 1100 µs (mode 4, 5) ¹⁾ SIO Logic: 15 ms (mode 1 and 6 combined) ¹⁾ IOL: 600 µs (mode 1, 2, 3) ²⁾ IOL: 1100 µs (mode 4, 5) ²⁾ IOL: 15 ms (mode 1 and 6 combined) ²⁾
Repeatability	SIO Logic: 200 µs (mode 1, 2, 3) ¹⁾ SIO Logic: 400 µs (mode 4, 5) ¹⁾ SIO Logic: 5 ms (mode 1 and 6 combined) ¹⁾ IOL: 250 µs (mode 1, 2, 3) ²⁾ IOL: 450 µs (mode 4, 5) ²⁾ IOL: 5 ms (mode 1 and 6 combined) ²⁾
Switching signal	
Switching signal Q_{L1}	Switching output
Switching signal \bar{Q}_{L1}	Switching output

¹⁾ Use of Smart Task functions without IO-Link communication (SIO mode).²⁾ Use of Smart Task functions with IO-Link communication function.

Diagnosis


Device temperature	
---------------------------	--

	Measuring range	Very cold, cold, moderate, warm, hot
Device status	Yes	
Detailed device status	Yes	
Operating hour counter	Yes	
Operating hours counter with reset function	Yes	
Quality of teach	Yes	

Classifications


ECLASS 5.0	27270904
ECLASS 5.1.4	27270904
ECLASS 6.0	27270904
ECLASS 6.2	27270904
ECLASS 7.0	27270904
ECLASS 8.0	27270904
ECLASS 8.1	27270904
ECLASS 9.0	27270904
ECLASS 10.0	27270904
ECLASS 11.0	27270904
ECLASS 12.0	27270903
ETIM 5.0	EC002719
ETIM 6.0	EC002719
ETIM 7.0	EC002719
ETIM 8.0	EC002719
UNSPSC 16.0901	39121528

display and adjustment elements

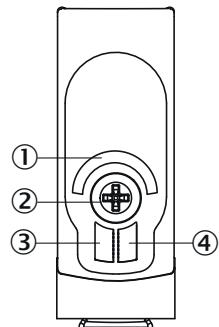

- ① LED blue
- ② Teach-Turn adjustment
- ③ LED green
- ④ LED yellow


Display and setting detail

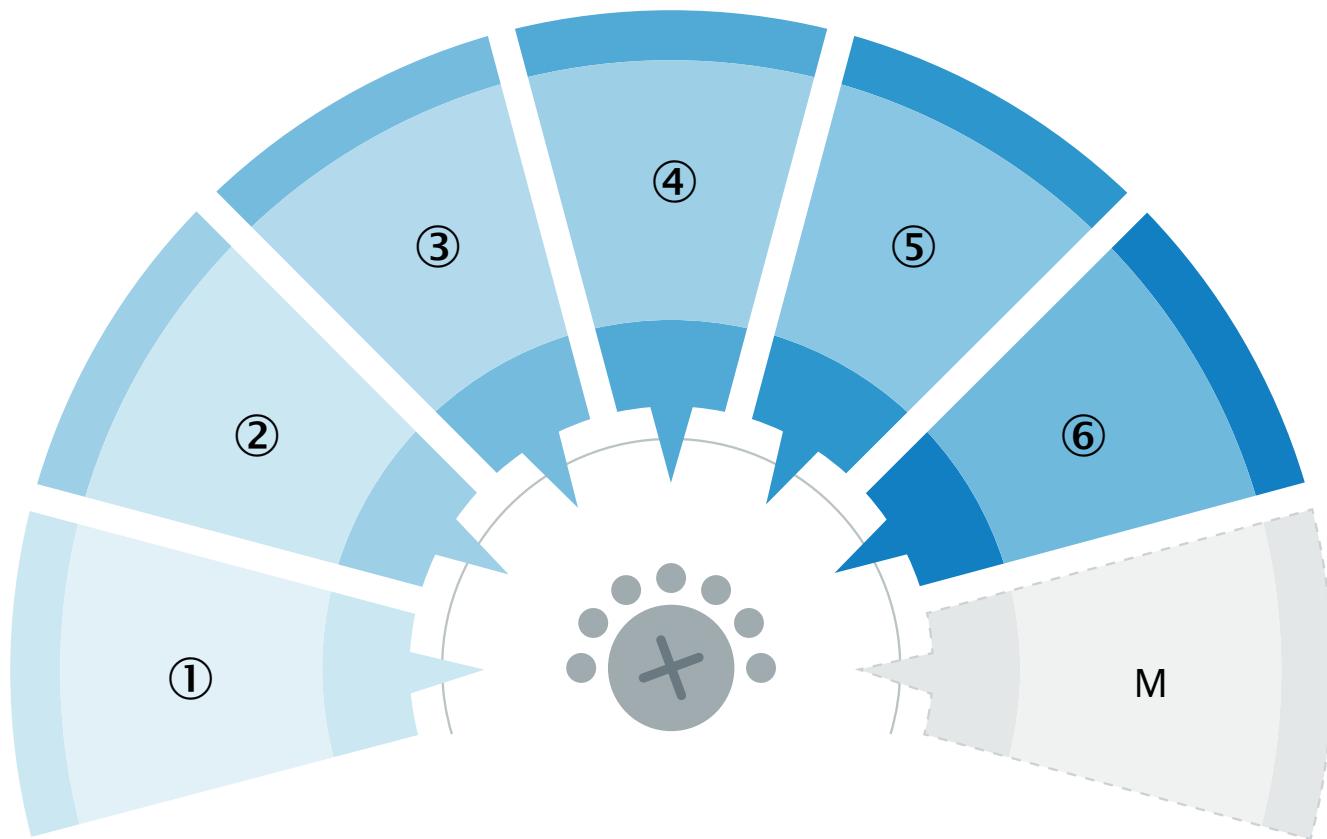


MultiMode settings

1	Background suppression
2	Foreground suppression
3	Two-point teach-in
4	Two independent switching points
5	Window
6	ApplicationSelect
M	Manual / measurement


Connection type M12 male connector, 4-pin



Connection diagram Cd-598 (Mode 1, 2, 3, 5, 6)



Connection diagram Cd-597 (Mode 4)



Truth table Push-pull: PNP/NPN – dark switching \bar{Q}_{L2} (MultiMode 4)

Dark switching \bar{Q}_{L2} (normally closed (upper switch), normally open (lower switch))		
	Object not present → Output HIGH	Object present → Output LOW
Light receive	✗	✓
Light receive indicator	✗	✗
Load resistance to L+	✗	⚡
Load resistance to M	⚡	✗

Light receive indicator

Light receive



Load resistance to L+

Load resistance to M



Mode 4: + (L+) → Input → Load → - (M)

MultiMode 4: + (L+) → Input → Load → - (M)



Truth table Push-pull: PNP/NPN – light switching Q_{L2} (MultiMode 4)

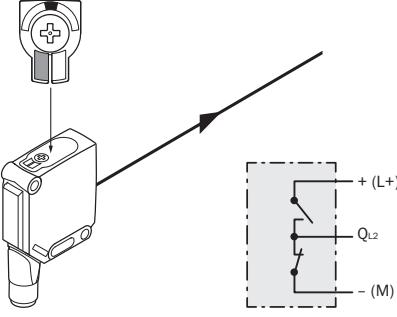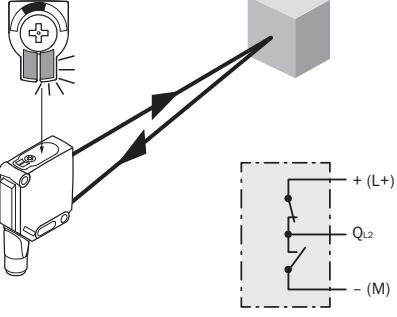Light switching Q_{L2} (normally open (upper switch), normally closed (lower switch))		
	Object not present → Output LOW	Object present → Output HIGH
Light receive	✗	✓
Light receive indicator	✗	✗
Load resistance to L+	⚡	✗
Load resistance to M	✗	⚡
		



Truth table Push-pull: PNP/NPN – dark switching \bar{Q}_{L1} (MultiMode 4)

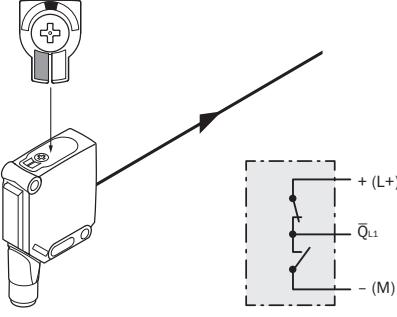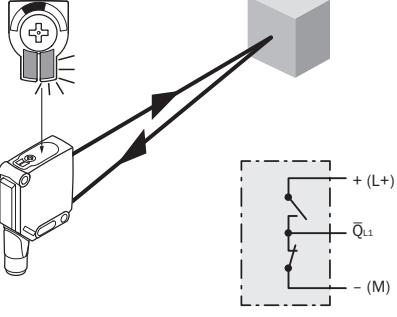Dark switching \bar{Q}_{L1} (normally closed (upper switch), normally open (lower switch))		
	Object not present → Output HIGH	Object present → Output LOW
Light receive	✗	✓
Light receive indicator	✗	✗
Load resistance to L+	✗	⚡
Load resistance to M	⚡	✗
		

Truth table Push-pull: PNP/NPN – light switching Q_{L1} (MultiMode 4)

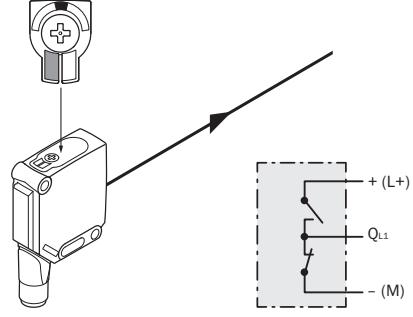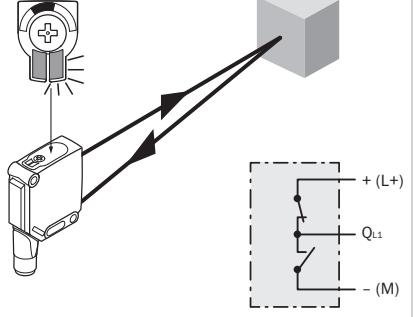		Light switching Q_{L1} (normally open (upper switch), normally closed (lower switch))	
		Object not present → Output LOW	Object present → Output HIGH
Light receive		✗	✓
Light receive indicator		✗	✗
Load resistance to L+		⚠	✗
Load resistance to M		✗	⚠
			

Truth table Push-pull: PNP/NPN – dark switching \bar{Q} (MultiMode 2)

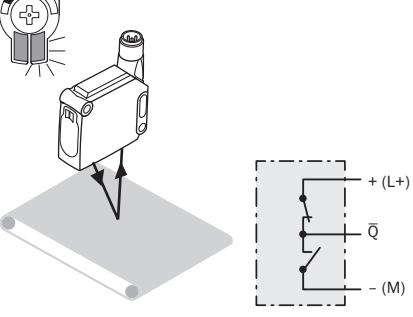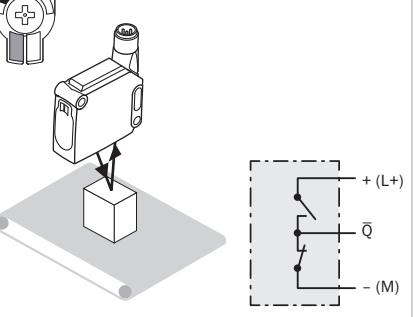		Dark switching \bar{Q} (normally closed (upper switch), normally open (lower switch))	
		Object not present → Output HIGH	Object present → Output LOW
Light receive		✗	✓
Light receive indicator		✗	✗
Load resistance to L+		✗	⚠
Load resistance to M		⚠	✗
			



Truth table Push-pull: PNP/NPN – light switching Q (MultiMode 2)

Light switching Q (normally open (upper switch), normally closed (lower switch))		
	Object not present → Output LOW	Object present → Output HIGH
Light receive	✗	✓
Light receive indicator	✗	💡
Load resistance to L+	⚡	✗
Load resistance to M	✗	⚡

Truth table Push-pull: PNP/NPN – light switching Q (MultiMode 1, 3, 5, 6)


Light switching Q (normally open (upper switch), normally closed (lower switch))			
	Object not present → Output LOW	Object present → Output HIGH	
Light receive			
Light receive indicator			
Load resistance to L+			
Load resistance to M			

Truth table Push-pull: PNP/NPN – dark switching \bar{Q} (MultiMode 1, 3, 5, 6)

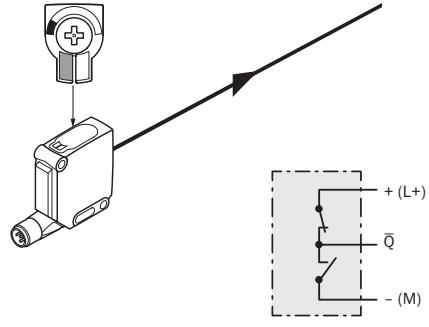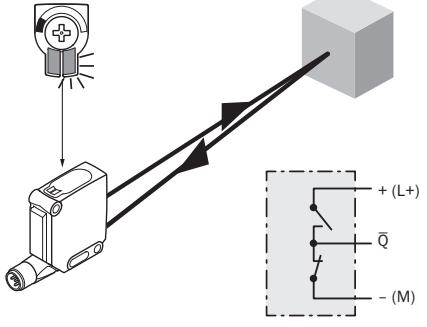	Dark switching \bar{Q} (normally closed (upper switch), normally open (lower switch))	
	Object not present → Output HIGH	Object present → Output LOW
Light receive	✖	✓
Light receive indicator	✖	✖
Load resistance to L+	✖	⚡
Load resistance to M	⚡	✖
		

Characteristic curve Mode 1, 3, 4, 5


Minimum distance in mm (y) between the set sensing range and white background (90 % remission)

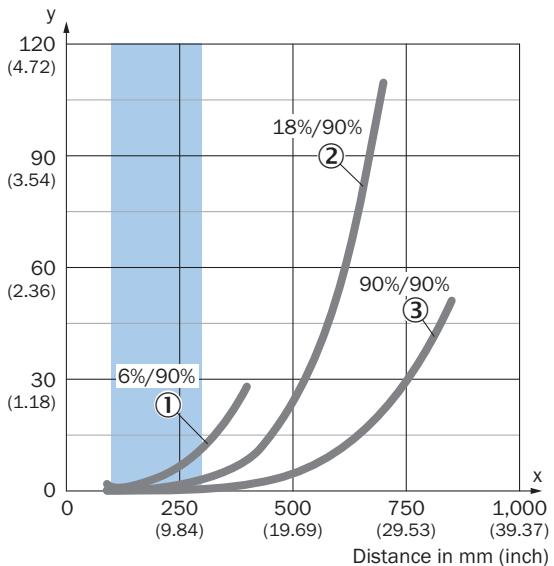

 Recommended sensing range for the best performance

- ① Black object, 6% remission factor
- ② Gray object, 18% remission factor
- ③ White object, 90% remission factor


Example:
Safe suppression of the background

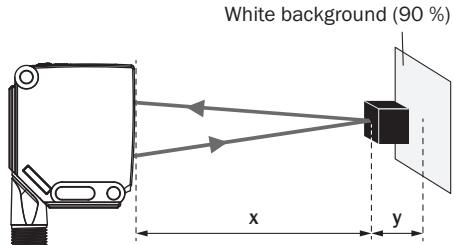

Black object (6 % remission)
Set sensing range $x = 250$ mm
Needed minimum distance to white background $y = 6$ mm

Characteristic curve Mode 1 and 6 combined


Minimum distance in mm (y) between the set sensing range and white background (90 % remission)

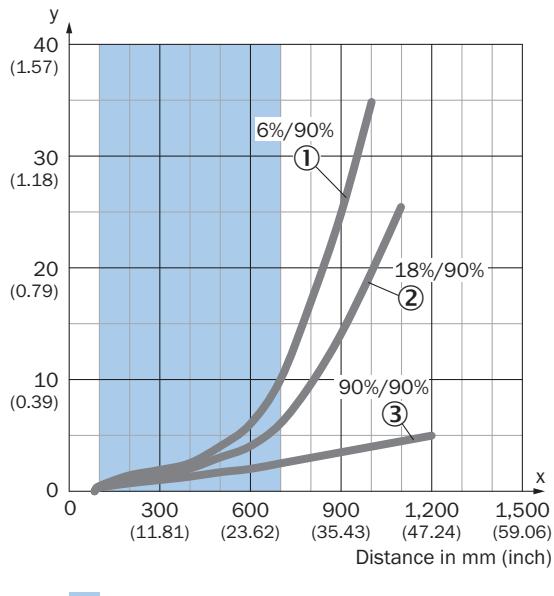

■ Recommended sensing range for the best performance

- ① Black object, 6% remission factor
- ② Gray object, 18% remission factor
- ③ White object, 90% remission factor


Example:
Safe suppression of the background

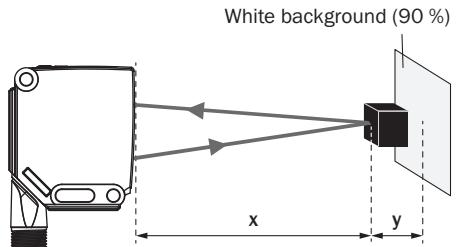

Black object (6 % remission)
Set sensing range $x = 650$ mm
Needed minimum distance to white background $y = 6$ mm

Characteristic curve Mode 2


Minimum object height in mm (inch)

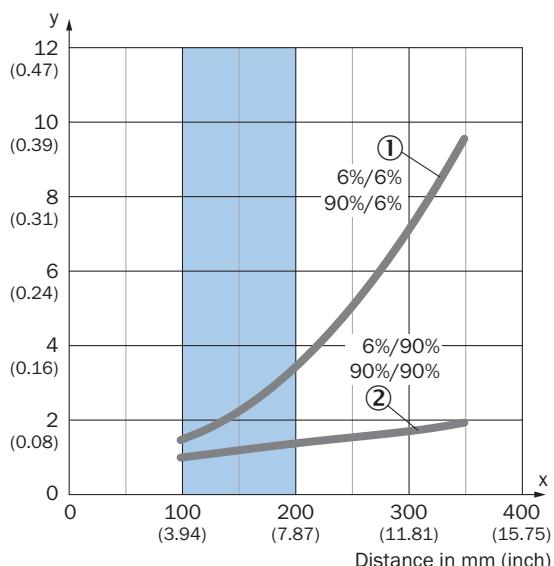

■ Recommended sensing range for the best performance

- ① Black background, 6% remission factor
- ② White background, 90% remission factor


Example:
Reliable detection of the object

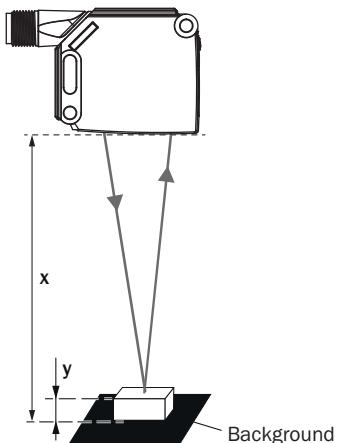

Black background (6 % remission factor)
Distance of sensor to background $x = 150$ mm
Required minimum object height $y = 2.2$ mm
For all objects regardless of their colors

Light spot size Mode 2


Dimensions in mm (inch)

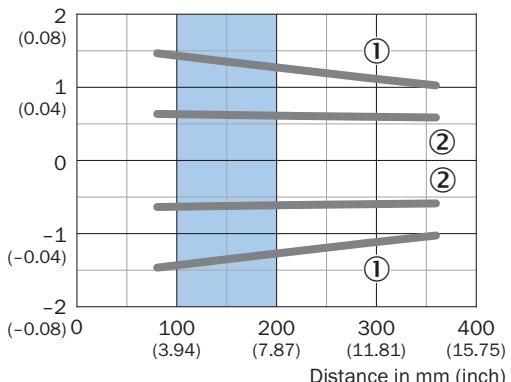

① Recommended sensing range for the best performance


① Light spot horizontal

② Light spot vertical

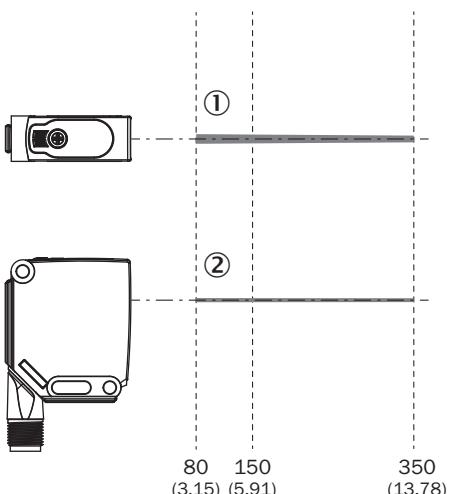

Light spot size Mode 1 and 6 combined


Dimensions in mm (inch)

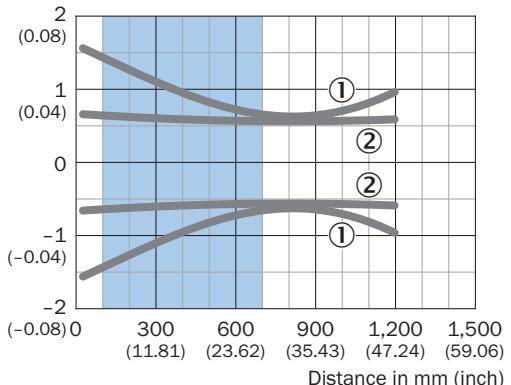

① Recommended sensing range for the best performance



① Light spot horizontal

② Light spot vertical

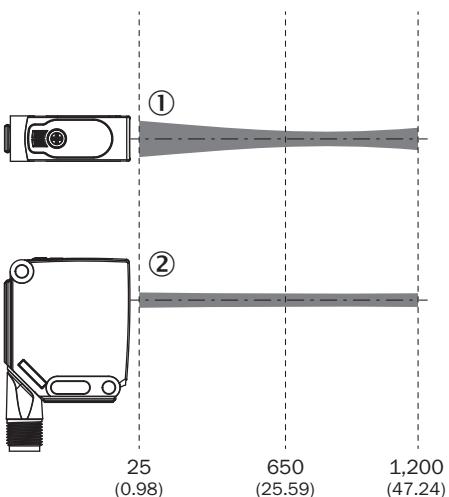

Light spot size Mode 1, 3, 4, 5

Dimensions in mm (inch)

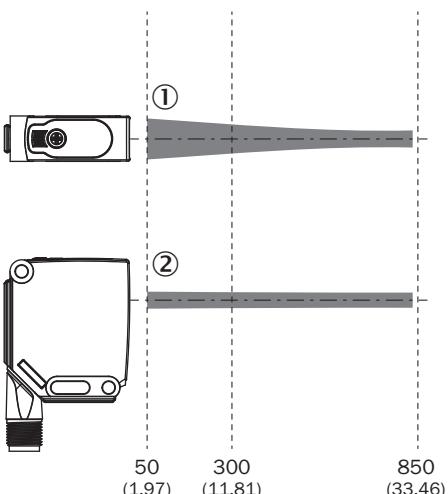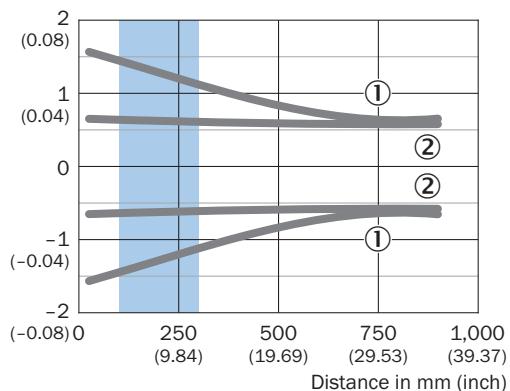


■ Recommended sensing range for the best performance

① Light spot horizontal

② Light spot vertical


Sensing range diagram Mode 1, 3, 4, 5

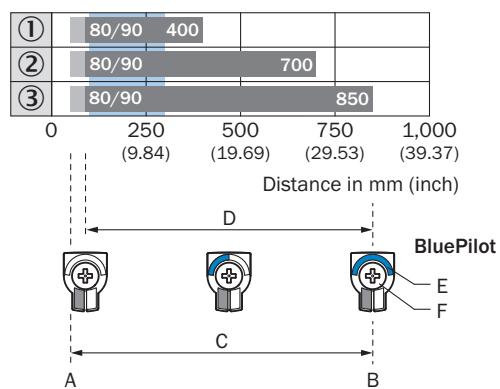

■ Recommended sensing range for the best performance

1	Black object, 6% remission factor
2	Gray object, 18% remission factor
3	White object, 90% remission factor
A	Sensing range min. in mm
B	Sensing range max. in mm
C	Field of view
D	Adjustable switching threshold for background suppression
E	Sensing range indicator
F	Teach-Turn adjustment


Sensing range diagram Mode 1 and 6 combined

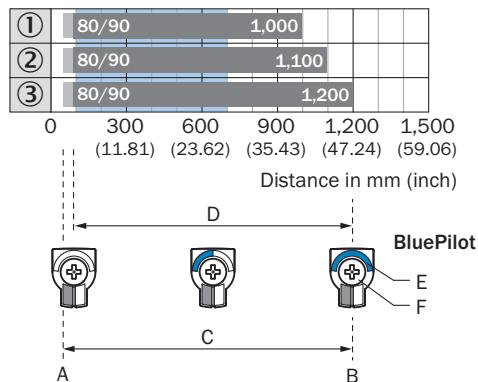

■ Recommended sensing range for the best performance

1	Black object, 6% remission factor
2	Gray object, 18% remission factor
3	White object, 90% remission factor
A	Sensing range min. in mm
B	Sensing range max. in mm
C	Field of view
D	Adjustable switching threshold for background suppression
E	Sensing range indicator
F	Teach-Turn adjustment


Sensing range diagram Mode 2

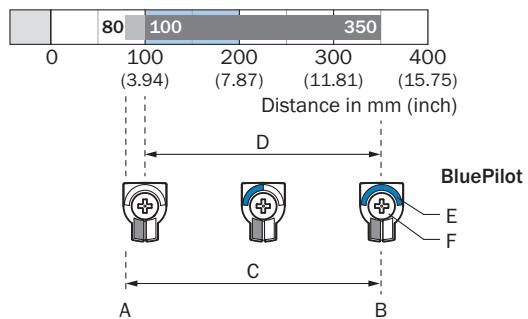

■ Recommended sensing range for the best performance

A	Sensing range min. in mm
B	Sensing range max. in mm
C	Field of view
D	Adjustable switching threshold for background suppression
E	Sensing range indicator
F	Teach-Turn adjustment

Dimensional drawing

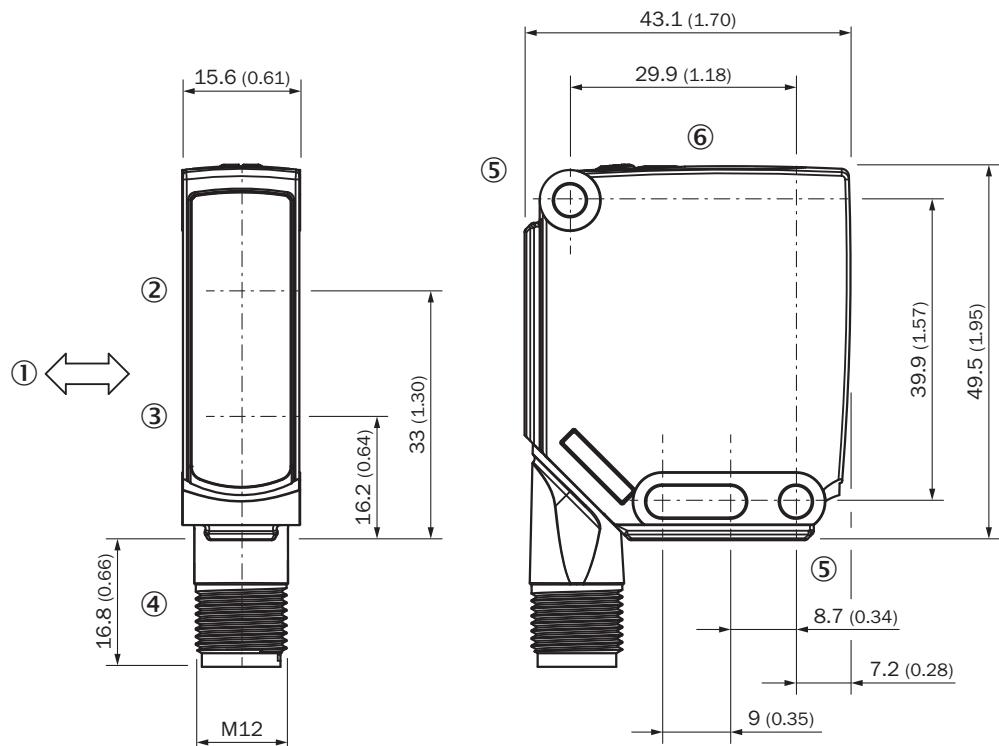

Dimensions in mm (inch)

- ① Standard direction of the material being detected
- ② Center of optical axis, receiver
- ③ Center of optical axis, sender
- ④ Connection
- ⑤ Mounting hole, Ø 4.2 mm
- ⑥ display and adjustment elements

Recommended accessories

Other models and accessories → www.sick.com/W12

	Brief description	Type	part no.
Mounting systems			
	<ul style="list-style-type: none">Description: Plate N03 for universal clamp bracket, zinc coatedMaterial: Steel, zinc diecastDetails: Zinc plated steel (sheet), Zinc die cast (clamping bracket)Items supplied: Universal clamp (5322626), mounting hardwareUsable for: UC12, W14-2, W18-2, W18-3, W11-2, W12-3, W12-2 Laser, W12G, W12 Teflon, W16, W24-2 Ex, PowerProx, W11G-2, TranspaTect, W18-3 Ex, W24-2, PL50A, PL80A, PL40A, P250	BEF-KHS-N03	2051609
	<ul style="list-style-type: none">Description: Clamping block for dovetail mountingMaterial: AluminumDetails: Aluminum (anodised)Items supplied: Mounting hardware includedSuitable for: W11-2, W12-3	BEF-KH-W12	2013285
	<ul style="list-style-type: none">Description: Mounting bracket, largeMaterial: Stainless steelDetails: Stainless steelItems supplied: Mounting hardware includedSuitable for: W11-2, W12-3, W16	BEF-WG-W12	2013942
	<ul style="list-style-type: none">Material: AluminumDetails: AluminumItems supplied: Including mounting material (sensor) and mounting material (bracket)Usable for: Adapter plate for W23L/W27L to W12L	BEF-AP-W12	2127742
connectors and cables			
	<ul style="list-style-type: none">Connection type head A: Female connector, M12, 4-pin, straight, A-codedConnection type head B: Flying leadsSignal type: Sensor/actuator cableCable: 5 m, 4-wire, PVCDescription: Sensor/actuator cable, unshieldedApplication: Zones with chemicals, Uncontaminated zones	YF2A14-050VB3XLEAX	2096235

	Brief description	Type	part no.
network devices			
		SIG300-0A0GAA100	1131014
		SIG300-0A04AA100	1131011
		SIG300-0A05AA100	1131012
		SIG300-0A06AA100	1131013

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

WORLDWIDE PRESENCE:

Contacts and other locations www.sick.com