



# WTT4SLC-3B0062B04

WTT4 PowerProx

TIME-OF-FLIGHT SENSORS

**SICK**  
Sensor Intelligence.



Illustration may differ



Ordering information

| Type              | part no. |
|-------------------|----------|
| WTT4SLC-3B0062B04 | 1118244  |

Other models and accessories → [www.sick.com/WTT4\\_PowerProx](http://www.sick.com/WTT4_PowerProx)

Detailed technical data

Features

|                                   |                                                            |
|-----------------------------------|------------------------------------------------------------|
| Functional principle              | Photoelectric proximity sensor                             |
| Functional principle detail       | Background suppression, Optical time-of-flight             |
| Housing design (light emission)   | Rectangular                                                |
| Sensing range max.                | 50 mm ... 1,300 mm <sup>1)</sup>                           |
| Sensing range                     | 100 mm ... 1,300 mm <sup>2)</sup>                          |
| Distance value                    |                                                            |
| Measuring range                   | 90 mm ... 1,300 mm <sup>1)</sup>                           |
| Resolution                        | 1 mm                                                       |
| Repeatability                     | 4,5 mm ... 11 mm <sup>3)</sup> <sup>4)</sup> <sup>5)</sup> |
| Accuracy                          | - 10 mm, + 80 mm                                           |
| Distance value output             | Via IO-Link                                                |
| Update rate of the distance value | 0.8 ms                                                     |
| Type of light                     | Visible red light                                          |
| Light source                      | Laser <sup>6)</sup>                                        |
| Light spot size (distance)        | Ø 4 mm (1,000 mm)                                          |

<sup>1)</sup> Object with 6 ... 90% remission (based on standard white, DIN 5033).

<sup>2)</sup> Adjustable.

<sup>3)</sup> Equivalent to 1  $\sigma$ .

<sup>4)</sup> See characteristic curves repeatability.

<sup>5)</sup> 6% ... 90% remission factor.

<sup>6)</sup> Average service life: 50,000 h at T<sub>U</sub> = +25 °C.

|                                  |                                                                                  |
|----------------------------------|----------------------------------------------------------------------------------|
| <b>Wave length</b>               | 658 nm                                                                           |
| <b>Laser class</b>               | 1 (IEC 60825-1 / CDRH 21 CFR 1040.10 & 1040.11)                                  |
| <b>Adjustment</b>                | Single teach-in button, IO-Link                                                  |
| <b>Pin 2 configuration</b>       | External input, Teach-in input, Sender off input, Detection output, logic output |
| <b>Safety-related parameters</b> |                                                                                  |
| MTTF <sub>D</sub>                | 256 years                                                                        |
| DC <sub>avg</sub>                | 0 %                                                                              |
| T <sub>M</sub> (mission time)    | 10 years                                                                         |

1) Object with 6 ... 90% remission (based on standard white, DIN 5033).

2) Adjustable.

3) Equivalent to 1  $\sigma$ .

4) See characteristic curves repeatability.

5) 6% ... 90% remission factor.

6) Average service life: 50,000 h at T<sub>U</sub> = +25 °C.

## Interfaces

|                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Communication interface</b>        | IO-Link V1.1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Communication Interface detail</b> | COM3 (230,4 kBaud)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Cycle time</b>                     | 0.8 ms                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Process data length</b>            | 4 Byte                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>Process data structure</b>         | Bit 0 = switching signal Q <sub>L1</sub><br>Bit 1 = switching signal Q <sub>L2</sub><br>Bit 2 = detection signal Q <sub>int.1</sub><br>Bit 3 = detection signal Q <sub>int.2</sub><br>Bit 4 = detection signal Q <sub>int.3</sub><br>Bit 5 = detection signal Q <sub>int.4</sub><br>Bit 6 = detection signal Q <sub>int.5</sub><br>Bit 7 = detection signal Q <sub>int.6</sub><br>Bit 8 = detection signal Q <sub>int.7</sub><br>Bit 9 = detection signal Q <sub>int.8</sub><br>Bit 10 ... 15 = empty<br>Bit 16 ... 31 = distance value |
| <b>VendorID</b>                       | 26                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>DeviceID HEX</b>                   | 0x80021D                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>DeviceID DEC</b>                   | 8389149                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

## Electronics

|                                     |                                   |
|-------------------------------------|-----------------------------------|
| <b>Supply voltage U<sub>B</sub></b> | 10 V DC ... 30 V DC <sup>1)</sup> |
| <b>Ripple</b>                       | < 5 V <sub>pp</sub> <sup>2)</sup> |
| <b>Current consumption</b>          | 25 mA <sup>3)</sup>               |
| <b>Switching output</b>             | Push-pull: PNP/NPN                |

1) Limit values. Operated in short-circuit protected network: max. 8 A.

2) May not fall below or exceed U<sub>y</sub> tolerances.

3) Without load.

4) Signal transit time with resistive load.

5) With light/dark ratio 1:1.

6) A = V<sub>S</sub> connections reverse-polarity protected.

7) B = output reverse-polarity protected.

8) D = outputs overcurrent and short-circuit protected.

9) Below T<sub>U</sub> = -10 °C a warm-up time is necessary.

|                                             |                                                                                                                                                                                                                             |
|---------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Output function</b>                      | Factory setting: Pin 2 / white (MF): NPN normally open (light switching), PNP normally closed (dark switching), Pin 4 / black (QL1 / C): NPN normally closed (dark switching), PNP normally open (light switching), IO-Link |
| <b>Switching mode</b>                       | Light/dark switching                                                                                                                                                                                                        |
| <b>Output current <math>I_{\max}</math></b> | $\leq 50$ mA                                                                                                                                                                                                                |
| <b>Response time</b>                        | $\leq 5$ ms <sup>4)</sup>                                                                                                                                                                                                   |
| <b>Switching frequency</b>                  | 100 Hz <sup>5)</sup>                                                                                                                                                                                                        |
| <b>Input</b>                                | MF <sub>in</sub> = multifunctional input programmable                                                                                                                                                                       |
| <b>Circuit protection</b>                   | A <sup>6)</sup><br>B <sup>7)</sup><br>D <sup>8)</sup>                                                                                                                                                                       |
| <b>Protection class</b>                     | III                                                                                                                                                                                                                         |
| <b>Enclosure rating</b>                     | IP67                                                                                                                                                                                                                        |
| <b>Warm-up time</b>                         | < 10 min <sup>9)</sup>                                                                                                                                                                                                      |
| <b>Initialization time</b>                  | < 300 ms                                                                                                                                                                                                                    |

<sup>1)</sup> Limit values. Operated in short-circuit protected network: max. 8 A.

<sup>2)</sup> May not fall below or exceed  $U_V$  tolerances.

<sup>3)</sup> Without load.

<sup>4)</sup> Signal transit time with resistive load.

<sup>5)</sup> With light/dark ratio 1:1.

<sup>6)</sup> A =  $V_S$  connections reverse-polarity protected.

<sup>7)</sup> B = output reverse-polarity protected.

<sup>8)</sup> D = outputs overcurrent and short-circuit protected.

<sup>9)</sup> Below  $T_u = -10$  °C a warm-up time is necessary.

## Mechanics

|                               |                                              |
|-------------------------------|----------------------------------------------|
| <b>Dimensions (W x H x D)</b> | 12.2 mm x 41.8 mm x 17.3 mm                  |
| <b>Housing material</b>       | Plastic, MABS, ABS                           |
| <b>Optics material</b>        | Plastic, PMMA                                |
| <b>Weight</b>                 | 10 g                                         |
| <b>Connection type</b>        | Cable with M12 male connector, 4-pin, 300 mm |
| <b>Connection type Detail</b> |                                              |
| Cable diameter                | Ø 3.4 mm                                     |
| Conductor cross section       | 0.14 mm <sup>2</sup>                         |

## Ambient data

|                                      |                                 |
|--------------------------------------|---------------------------------|
| <b>Ambient operating temperature</b> | -40 °C ... +50 °C <sup>1)</sup> |
| <b>Ambient temperature, storage</b>  | -40 °C ... +75 °C               |

<sup>1)</sup> As of  $T_a = 45$  °C, a max.load current  $I_{\max} = 50$  mA is permitted.

## Smart Task

|                        |                                             |
|------------------------|---------------------------------------------|
| <b>Smart Task name</b> | Base logics                                 |
| <b>Logic function</b>  | Direct<br>AND<br>OR<br>WINDOW<br>Hysteresis |
| <b>Timer function</b>  | Deactivated                                 |

|                                  |                                                                        |
|----------------------------------|------------------------------------------------------------------------|
|                                  | Switch-on delay<br>Off delay<br>ON and OFF delay<br>Impulse (one shot) |
| <b>Inverter</b>                  | Yes                                                                    |
| <b>Switching signal</b>          |                                                                        |
| Switching signal Q <sub>L1</sub> | Switching output                                                       |
| Switching signal Q <sub>L2</sub> | Switching output                                                       |

## Certificates

|                                               |   |
|-----------------------------------------------|---|
| <b>EU declaration of conformity</b>           | ✓ |
| <b>UK declaration of conformity</b>           | ✓ |
| <b>ACMA declaration of conformity</b>         | ✓ |
| <b>Moroccan declaration of conformity</b>     | ✓ |
| <b>China-RoHS</b>                             | ✓ |
| <b>cULus certificate</b>                      | ✓ |
| <b>IO-Link</b>                                | ✓ |
| <b>Laser safety (IEC 60825-1) certificate</b> | ✓ |

## Classifications

|                       |          |
|-----------------------|----------|
| <b>ECLASS 5.0</b>     | 27270904 |
| <b>ECLASS 5.1.4</b>   | 27270904 |
| <b>ECLASS 6.0</b>     | 27270904 |
| <b>ECLASS 6.2</b>     | 27270904 |
| <b>ECLASS 7.0</b>     | 27270904 |
| <b>ECLASS 8.0</b>     | 27270904 |
| <b>ECLASS 8.1</b>     | 27270904 |
| <b>ECLASS 9.0</b>     | 27270904 |
| <b>ECLASS 10.0</b>    | 27270904 |
| <b>ECLASS 11.0</b>    | 27270904 |
| <b>ECLASS 12.0</b>    | 27270903 |
| <b>ETIM 5.0</b>       | EC002719 |
| <b>ETIM 6.0</b>       | EC002719 |
| <b>ETIM 7.0</b>       | EC002719 |
| <b>ETIM 8.0</b>       | EC002719 |
| <b>UNSPSC 16.0901</b> | 39121528 |

Technical drawing of the M12 x 1 connector showing front, side, and detail views with dimensions in mm and inches.

**Front View (Top):**

- Overall width: 12.2 (0.48)
- Overall height: 40.3 (1.59)
- Distance from top to mounting hole center: 29.1 (1.15)
- Distance from top to bottom flange: 8.4 (0.33)
- Mounting hole diameter:  $\varnothing 10.5$  (0.41)

**Side View (Right):**


- Overall width: 17.3 (0.68)
- Distance from top to mounting hole center: 29.1 (1.15)
- Distance from top to bottom flange: 8.4 (0.33)
- Distance from top to bottom flange: 11.2 (0.44)
- Distance from top to bottom flange: 253 (9.96)
- Distance from top to bottom flange: 47 (1.85)
- Distance from top to bottom flange: 3.4 (0.13)
- Distance from top to bottom flange: 12 (0.47)
- Distance from top to bottom flange: 2.6 (0.10)
- Mounting hole diameter:  $\varnothing 10.5$  (0.41)

**Detail View (Bottom):**

- Mounting hole diameter:  $\varnothing 10.5$  (0.41)
- Distance from top to bottom flange: 12 (0.47)
- Distance from top to bottom flange: 2.6 (0.10)
- Thread: M12 x 1
- Overall width: 15.9 (0.63)


- ① Center of optical axis
- ② Threaded mounting hole M3
- ③ Connection
- ④ LED indicator green: power
- ⑤ LED indicator yellow: Status of received light beam
- ⑥ single teach-in button

## Light spot size

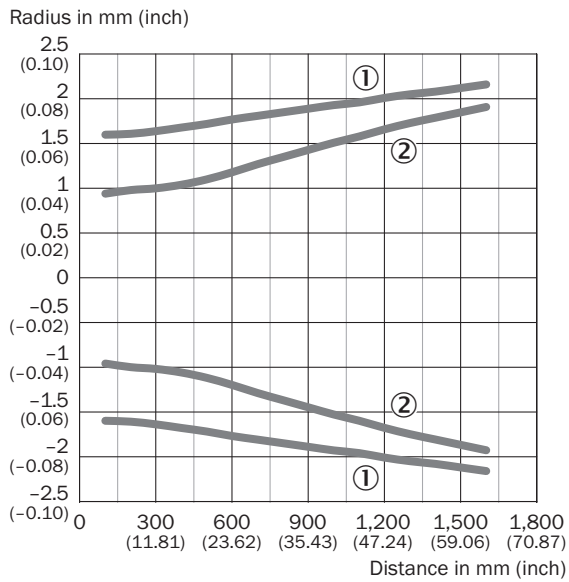


- ① Light spot horizontal
- ② Light spot vertical

## Scanning range

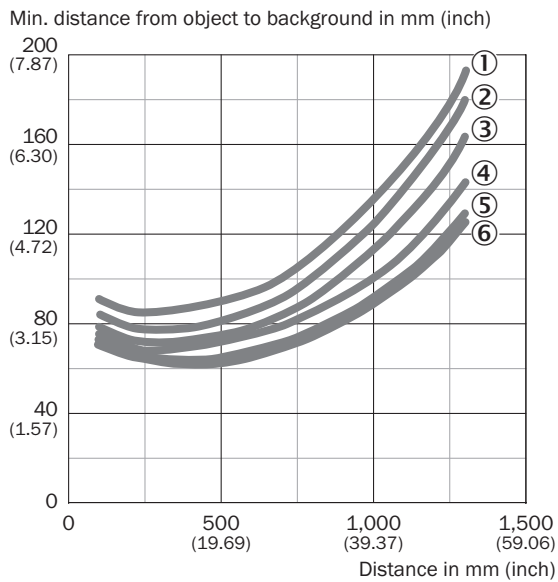


- ① 6 % / 90 % AVG1
- ② 6 % / 90 % AVG2
- ③ 6 % / 90 % AVG4
- ④ 6 % / 90 % AVG8
- ⑤ 6 % / 90 % AVG64
- ⑥ 6 % / 90 % AVG512

### Scanning range

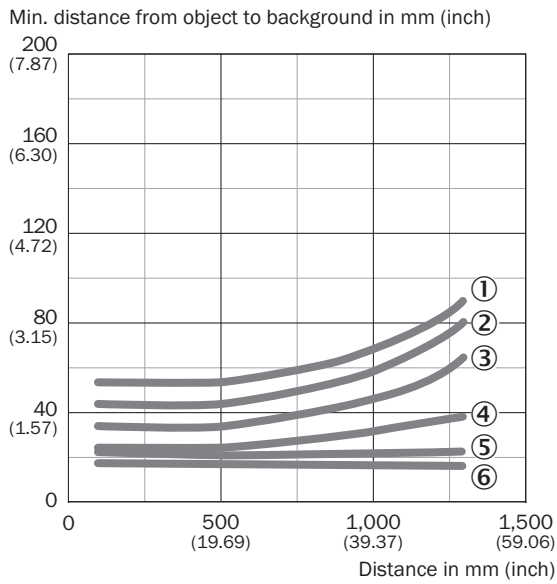

- ① 90 % / 90 % AVG1
- ② 90 % / 90 % AVG2
- ③ 90 % / 90 % AVG4
- ④ 90 % / 90 % AVG8
- ⑤ 90 % / 90 % AVG64
- ⑥ 90 % / 90 % AVG512

### Repeatability

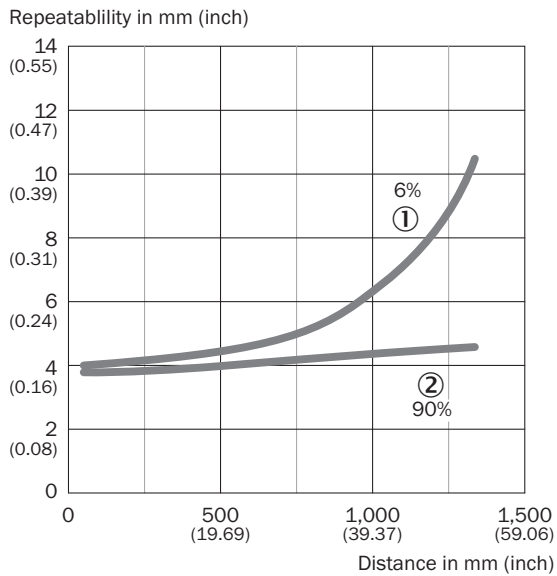

- ① 6 % remission, on black
- ② 90 % remission, on white

## Recommended accessories

Other models and accessories → [www.sick.com/WTT4\\_PowerProx](http://www.sick.com/WTT4_PowerProx)

|                                                                                   | Brief description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Type               | part no. |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------|
| Mounting systems                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                    |          |
|  | <ul style="list-style-type: none"> <li><b>Description:</b> Plate N08N for universal clamp bracket</li> <li><b>Material:</b> Stainless steel, stainless steel</li> <li><b>Details:</b> Stainless steel 1.4571 (sheet), Stainless steel 1.4408 (clamp)</li> <li><b>Items supplied:</b> Universal clamp (5322627), mounting hardware</li> <li><b>Usable for:</b> W100, W150, W4-3, W4S-3, W8, W9-3, W8G, W8 Laser, W8 Inox, G6, W100 Laser, W100-2, W4-3 Glass, W4S-3 Glass, RAY10, W4SLG-3, W9, GR18, MultiPulse, Reflex Array, Multi-Line, LUT3, KT5, KT8, KT10, CS8, G6 Inox</li> </ul> | BEF-KHS-N08N       | 2051616  |
| connectors and cables                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                    |          |
|  | <ul style="list-style-type: none"> <li><b>Connection type head A:</b> Male connector, M12, 4-pin, straight, A-coded</li> <li><b>Description:</b> Unshielded</li> <li><b>Connection systems:</b> Screw-type terminals</li> <li><b>Permitted cross-section:</b> ≤ 0.75 mm²</li> </ul>                                                                                                                                                                                                                                                                                                     | STE-1204-G         | 6009932  |
|  | <ul style="list-style-type: none"> <li><b>Connection type head A:</b> Female connector, M12, 4-pin, straight, A-coded</li> <li><b>Connection type head B:</b> Flying leads</li> <li><b>Signal type:</b> Sensor/actuator cable</li> <li><b>Cable:</b> 5 m, 4-wire, PVC</li> <li><b>Description:</b> Sensor/actuator cable, unshielded</li> <li><b>Application:</b> Zones with chemicals, Uncontaminated zones</li> </ul>                                                                                                                                                                 | YF2A14-050VB3XLEAX | 2096235  |

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)