



IMI18-08BNONCOS

IMI

INDUCTIVE PROXIMITY SENSORS

SICK
Sensor Intelligence.



Ordering information

| Type | part no. |
|-----------------|----------|
| IMI18-08BNONCOS | 1093934 |

Included in delivery: BEF-MU-M18N1 (1)

Other models and accessories → www.sick.com/IMI

Illustration may differ



Detailed technical data

Features

| | |
|--|--|
| Housing | Metric |
| Thread size | M18 x 1 |
| Diameter | Ø 18 mm |
| Sensing range S_n | 8 mm |
| Safe sensing range S_a | 6.48 mm |
| Installation type | Flush |
| Switching frequency | 50 Hz |
| Connection type | Male connector M12, 4-pin |
| Switching output | NPN |
| Switching output detail | NPN |
| Output function | NC |
| Electrical wiring | DC 3-wire |
| Enclosure rating | IP68, IP69K ¹⁾ |
| Special features | Sensing face made of stainless steel V4A, Resistant to cleaning agents |
| Special applications | Hygienic and washdown zones, Difficult application conditions |
| Items supplied | Mounting nut, V4A stainless steel (2x) |

¹⁾ According to EN 60529.

Mechanics/electronics

| | |
|-----------------------|---------------------|
| Supply voltage | 10 V DC ... 30 V DC |
| Ripple | $\leq 10\%^{1)}$ |

¹⁾ Of V_S .

²⁾ With I_{max} .

³⁾ Of S_r .

| | |
|--|---|
| Voltage drop | $\leq 2 \text{ V}^2)$ |
| Time delay before availability | $\leq 300 \text{ ms}$ |
| Hysteresis | 1 % ... 20 % |
| Reproducibility | $\leq 2 \text{ \%}^3)$ |
| Temperature drift (of S_r) | $\leq 10 \text{ \%}$ |
| EMC | According to EN 60947-5-2 |
| Continuous current I_a | $\leq 200 \text{ mA}$ |
| No load current | $\leq 10 \text{ mA}$ |
| Short-circuit protection | ✓ |
| Power-up pulse protection | ✓ |
| Shock and vibration resistance | 100 g / 5 ms / 1000 cycles; 150 g / 1 Mio cycles; 10 Hz ... 55 Hz, 1 mm / 55 Hz ... 500 Hz / 60 g |
| Ambient operating temperature | -25 °C ... +75 °C |
| Housing material | Stainless steel V4A, DIN 1.4404 / AISI 316L |
| Sensing face material | Stainless steel V4A, DIN 1.4404 / AISI 316L |
| Housing length | 64.7 mm |
| Thread length | 45.7 mm |
| Tightening torque, max. | $\leq 60 \text{ Nm}$ |
| Protection class | III |
| UL File No. | E181493 |

1) Of V_S .

2) With I_{max} .

3) Of S_r .

Safety-related parameters

| | |
|-------------------------|-------------|
| MTTF_D | 1,892 years |
| DC_{avg} | 0 % |

Reduction factors

| | |
|-----------------------------------|--|
| Note | The values are reference values which may vary |
| St37 steel (Fe) | Approx. 1 |
| Stainless steel (V2A, 304) | Approx. 0.83 |
| Aluminum (Al) | Approx. 0.52 |
| Copper (Cu) | Approx. 0.32 |
| Brass (Br) | Approx. 0.6 |

Installation note

| | |
|---------------|---------------------------------------|
| Remark | Associated graphic see "Installation" |
| B | 25 mm |
| C | 18 mm |
| D | 24 mm |
| F | 50 mm |

Certificates


| | |
|-------------------------------------|---|
| EU declaration of conformity | ✓ |
|-------------------------------------|---|

| | |
|---|---|
| UK declaration of conformity | ✓ |
| ACMA declaration of conformity | ✓ |
| Moroccan declaration of conformity | ✓ |
| China-RoHS | ✓ |
| ECOLAB certificate | ✓ |
| FDA-Certificate | ✓ |


Classifications

| | |
|-----------------------|----------|
| ECLASS 5.0 | 27270101 |
| ECLASS 5.1.4 | 27270101 |
| ECLASS 6.0 | 27270101 |
| ECLASS 6.2 | 27270101 |
| ECLASS 7.0 | 27270101 |
| ECLASS 8.0 | 27270101 |
| ECLASS 8.1 | 27270101 |
| ECLASS 9.0 | 27270101 |
| ECLASS 10.0 | 27270101 |
| ECLASS 11.0 | 27270101 |
| ECLASS 12.0 | 27274001 |
| ETIM 5.0 | EC002714 |
| ETIM 6.0 | EC002714 |
| ETIM 7.0 | EC002714 |
| ETIM 8.0 | EC002714 |
| UNSPSC 16.0901 | 39122230 |


Installation note Flush installation

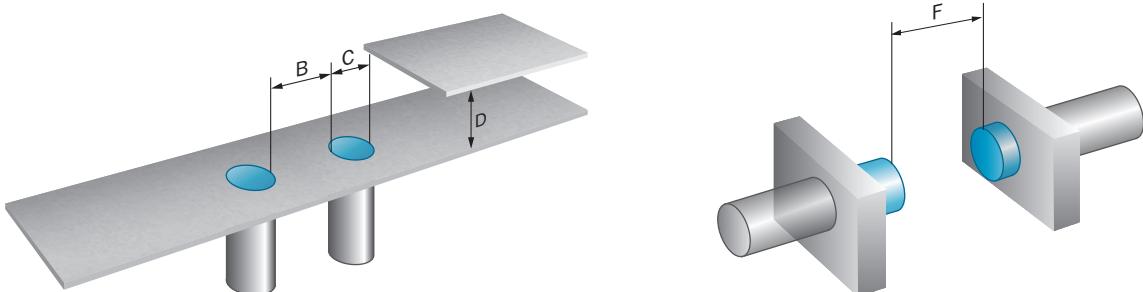


Connection diagram Cd-008



Response diagram

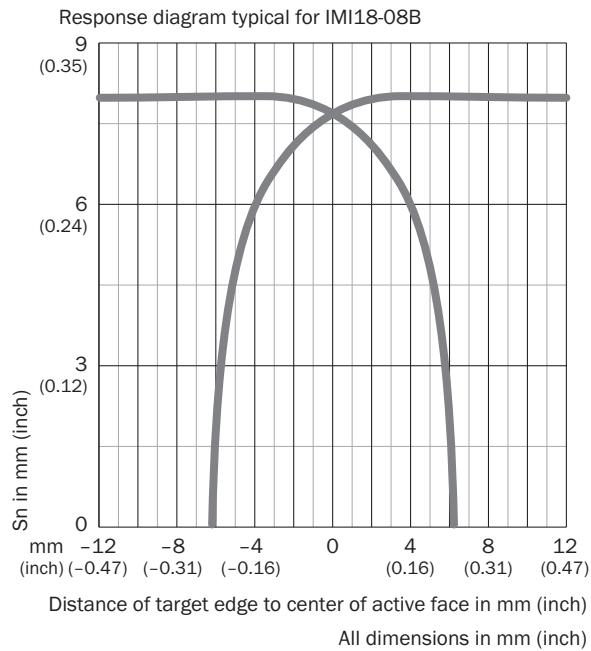

Dimensional drawing IMI18 Inox, flush

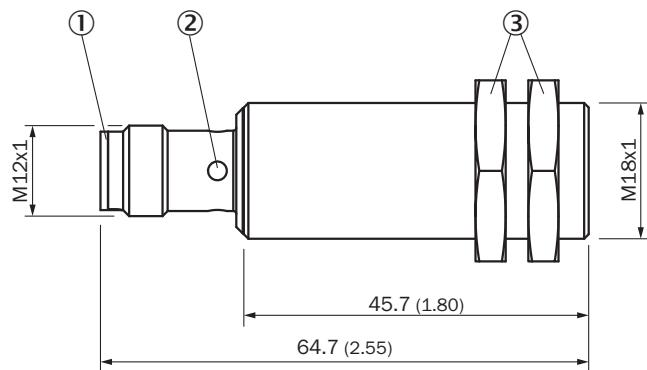

Dimensions in mm (inch)

- ① Connection
- ② Display LED
- ③ Fastening nuts (2 x); width across 24, stainless steel V4A

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

WORLDWIDE PRESENCE:

Contacts and other locations www.sick.com