



**RSB1-0560E070140BA31ZZZZZZZ**

Roller Sensor Bar

**PHOTOELECTRIC SENSORS**

**SICK**  
Sensor Intelligence.



Illustration may differ



Ordering information

| Type                      | part no. |
|---------------------------|----------|
| RSB1-0560E070140BA31ZZZZZ | 1126110  |

Other models and accessories → [www.sick.com/Roller\\_Sensor\\_Bar](http://www.sick.com/Roller_Sensor_Bar)

Detailed technical data

Features

|                                                                              |                                                                                                 |                                                                                       |
|------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>Functional principle</b>                                                  |                                                                                                 | Photoelectric proximity sensor                                                        |
| <b>Functional principle detail</b>                                           |                                                                                                 | Energetic                                                                             |
| <b>Sensing range</b>                                                         |                                                                                                 |                                                                                       |
|                                                                              | Sensing range min.                                                                              | 2 mm                                                                                  |
|                                                                              | Sensing range max.                                                                              | 300 mm                                                                                |
|                                                                              | Reference object                                                                                | Object with 90% remission factor (complies with standard white according to DIN 5033) |
|                                                                              | Recommended sensing range for the best performance                                              | 2 mm ... 45 mm                                                                        |
| <b>Emitted beam</b>                                                          |                                                                                                 |                                                                                       |
|                                                                              | Light source                                                                                    | LED                                                                                   |
|                                                                              | Type of light                                                                                   | Infrared light                                                                        |
|                                                                              | Shape of light spot                                                                             | Point-shaped                                                                          |
|                                                                              | Light spot size (distance)                                                                      | 27 mm x 29 mm (45 mm)                                                                 |
|                                                                              | Maximum dispersion of the emitted beam around the standardized transmission axis (squint angle) | < +/- 4° (at Ta = +23 °C)                                                             |
| <b>Key LED figures</b>                                                       |                                                                                                 |                                                                                       |
|                                                                              | LED risk group marking                                                                          | Free group                                                                            |
|                                                                              | Wave length                                                                                     | 850 nm                                                                                |
|                                                                              | Average service life                                                                            | 100,000 h at Ta = +25 °C                                                              |
| <b>Number of beams</b>                                                       |                                                                                                 | 5                                                                                     |
| <b>Beam separation</b>                                                       |                                                                                                 | 70 mm                                                                                 |
| <b>Distance from 1st beam to leading edge of housing (including end cap)</b> |                                                                                                 | 140 mm                                                                                |
| <b>Smallest detectable object (MDO) typ.</b>                                 |                                                                                                 |                                                                                       |
|                                                                              |                                                                                                 | 140 mm (Dependent on distance between beams)                                          |
| <b>Adjustment</b>                                                            |                                                                                                 |                                                                                       |
|                                                                              | None                                                                                            | –                                                                                     |
| <b>Display</b>                                                               |                                                                                                 |                                                                                       |

|                             |            |                                                                                                                                   |
|-----------------------------|------------|-----------------------------------------------------------------------------------------------------------------------------------|
| <b>Special applications</b> | LED green  | Operating indicatorStatic on: power on                                                                                            |
|                             | LED yellow | Status of received light beamStatic on: object presentStatic off: object not present                                              |
|                             |            | Detecting flat objects, Detecting perforated objects, Detecting objects with position tolerances, Detecting uneven, shiny objects |

## Electronics

|                                        |                                                                                |
|----------------------------------------|--------------------------------------------------------------------------------|
| <b>Supply voltage <math>U_B</math></b> | 10 V DC ... 30 V DC                                                            |
| <b>Ripple</b>                          | $\leq 5 V_{pp}$                                                                |
| <b>Usage category</b>                  | DC-12 (According to EN 60947-5-2)<br>DC-13 (According to EN 60947-5-2)         |
| <b>Current consumption</b>             | 23 mA, without load. At $U_B = 24 V$                                           |
| <b>Protection class</b>                | III                                                                            |
| <b>Digital output</b>                  |                                                                                |
| Number                                 | 2 (Complementary)                                                              |
| Type                                   | Push-pull: PNP/NPN                                                             |
| Switching mode                         | Light/dark switching                                                           |
| Signal voltage PNP HIGH/LOW            | Approx. $U_B - 2.5 V / 0 V$                                                    |
| Signal voltage NPN HIGH/LOW            | Approx. $U_B / < 2.5 V$                                                        |
| Output current $I_{max.}$              | $\leq 100 mA$                                                                  |
| Circuit protection outputs             | Reverse polarity protected<br>Overcurrent protected<br>Short-circuit protected |
| Response time                          | $\leq 1 ms^{1)}$                                                               |
| Repeatability (response time)          | 1 ms                                                                           |
| Switching frequency                    | 500 Hz <sup>2)</sup>                                                           |
| <b>Pin/Wire assignment</b>             |                                                                                |
| BN 1                                   | + (L+)                                                                         |
| WH 2                                   | $Q_2$                                                                          |
| BU 3                                   | - (M)                                                                          |
| BK 4                                   | $Q_1$                                                                          |
| Function of pin 4/black (BK)           | Digital output, dark switching, object present → output LOW                    |
| Function of pin 2/white (WH)           | Digital output, light switching, object present → output HIGH                  |

<sup>1)</sup> Signal transit time with resistive load.

<sup>2)</sup> With light/dark ratio 1:1.

## Mechanics

|                               |                                                                |
|-------------------------------|----------------------------------------------------------------|
| <b>Dimensions (W x H x D)</b> | 560 mm x 20.3 mm x 17 mm <sup>1)</sup>                         |
| <b>Connection</b>             | Cable with connector M8, 4-pin, with knurled nut <sup>2)</sup> |
| <b>Connection detail</b>      |                                                                |
| Deep-freeze property          | Do not bend below 0 °C                                         |
| Conductor size                | 0.13 mm <sup>2</sup>                                           |
| Cable diameter                | Ø 3.6 mm                                                       |

<sup>1)</sup> W = length of Roller Sensor Bar (in the installed state).

<sup>2)</sup> Due to the manufacturing process, the cable can be a little longer.

|                             |                            |
|-----------------------------|----------------------------|
| Length of cable (L)         | 800 mm <sup>2)</sup>       |
| <b>Material</b>             |                            |
| Housing                     | Metal, Aluminum (anodised) |
| Front screen                | Plastic, PMMA              |
| Cable                       | Plastic, PVC               |
| Male connector              | Plastic, PVC               |
| <b>Weight</b>               | Approx. 203.3 g            |
| <b>Mounting system type</b> | None                       |

<sup>1)</sup> W = length of Roller Sensor Bar (in the installed state).

<sup>2)</sup> Due to the manufacturing process, the cable can be a little longer.

## Ambient data

|                                            |                                                                                                   |
|--------------------------------------------|---------------------------------------------------------------------------------------------------|
| <b>Enclosure rating</b>                    | IP67 (EN 60529)                                                                                   |
| <b>Ambient operating temperature</b>       | -40 °C ... +60 °C                                                                                 |
| <b>Ambient temperature, storage</b>        | -40 °C ... +75 °C                                                                                 |
| <b>Shock resistance</b>                    | 30 g, 11 ms (3 positive and 3 negative shocks along X, Y, Z axes, 18 total shocks (EN60068-2-27)) |
| <b>Vibration resistance</b>                | 10 Hz ... 55 Hz (Amplitude 1 mm, 3 x 30 min (EN60068-2-6))                                        |
| <b>Air humidity</b>                        | 15 % ... 95 %, relative humidity (no condensation), as per IEC 60947-5-2                          |
| <b>Electromagnetic compatibility (EMC)</b> | EN 60947-5-2                                                                                      |
| <b>UL File No.</b>                         | NRKH.E189383 & NRKH7.E189383                                                                      |

## Certificates


|                                       |   |
|---------------------------------------|---|
| <b>EU declaration of conformity</b>   | ✓ |
| <b>UK declaration of conformity</b>   | ✓ |
| <b>ACMA declaration of conformity</b> | ✓ |
| <b>China-RoHS</b>                     | ✓ |
| <b>cULus certificate</b>              | ✓ |

## Classifications

|                     |          |
|---------------------|----------|
| <b>ECLASS 5.0</b>   | 27270904 |
| <b>ECLASS 5.1.4</b> | 27270904 |
| <b>ECLASS 6.0</b>   | 27270904 |
| <b>ECLASS 6.2</b>   | 27270904 |
| <b>ECLASS 7.0</b>   | 27270904 |
| <b>ECLASS 8.0</b>   | 27270904 |
| <b>ECLASS 8.1</b>   | 27270904 |
| <b>ECLASS 9.0</b>   | 27270904 |
| <b>ECLASS 10.0</b>  | 27270904 |
| <b>ECLASS 11.0</b>  | 27270904 |
| <b>ECLASS 12.0</b>  | 27270903 |
| <b>ETIM 5.0</b>     | EC002719 |
| <b>ETIM 6.0</b>     | EC002719 |
| <b>ETIM 7.0</b>     | EC002719 |

|                       |          |
|-----------------------|----------|
| <b>ETIM 8.0</b>       | EC002719 |
| <b>UNSPSC 16.0901</b> | 39121528 |


## Dimensional drawing

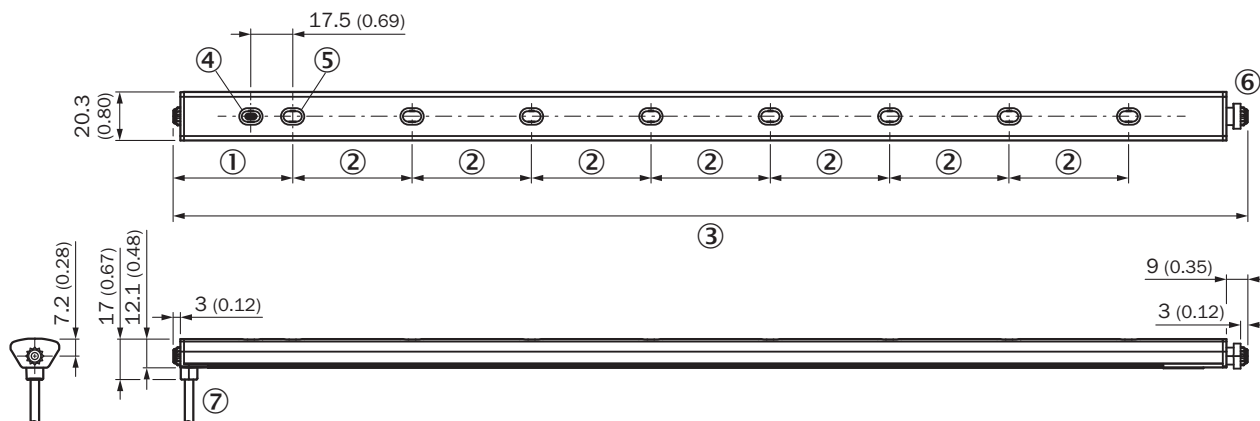

Dimensions in mm (inch)


- ① Distance from 1st beam to leading edge of housing (including end cap)
- ② Beam separation
- ③ length of Roller Sensor Bar (in the installed state)
- ④ display and adjustment elements
- ⑤ First beam (number of beams varies depending on the variant)
- ⑥ Spring loaded end cap (for further information see the installation note)
- ⑦ Connection

## display and adjustment elements




- ① LED green
- ② LED yellow

## Installation note




- ⑥ Range of motion of the spring loaded end cap (up to 5 mm of compression in uninstalled state)

Connection type Male connector M8, 4-pin



Characteristic curve

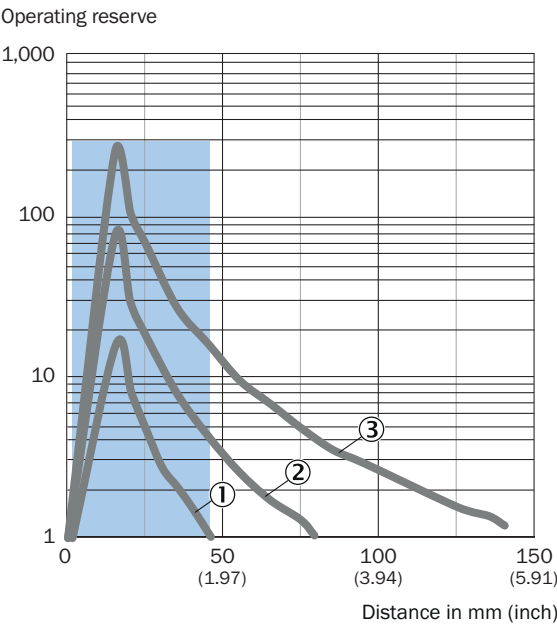


Recommended sensing range for the best performance


- ① Black object, 6% remission factor
- ② Gray object, 18% remission factor
- ③ White object, 90% remission factor

## Light spot size

Dimensions in mm (inch)

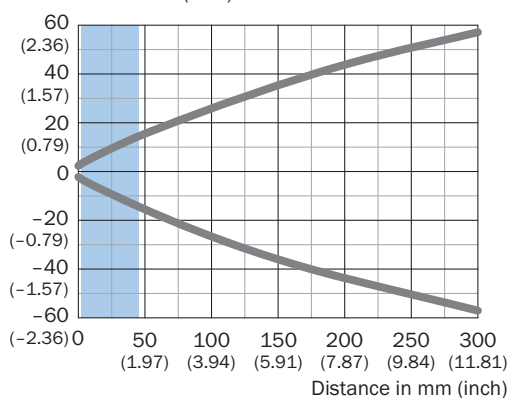


Recommended sensing range for the best performance

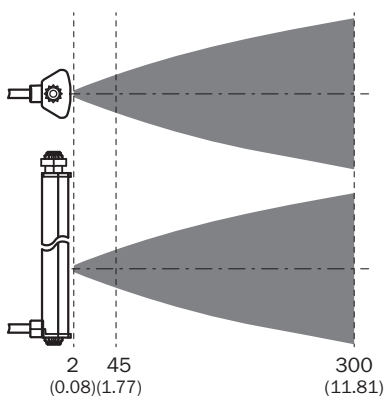

## Light spot size


mm (inch)

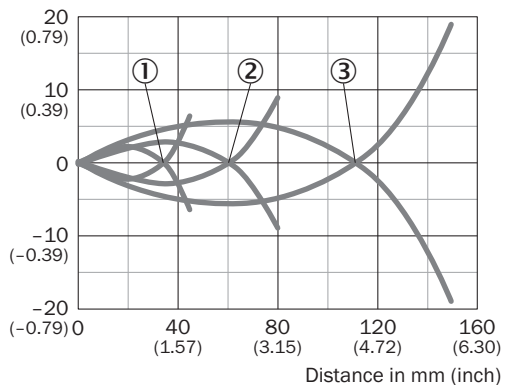

- ① Black object, 6% remission factor
- ② Gray object, 18% remission factor
- ③ White object, 90% remission factor

### Recommended accessories

Other models and accessories → [www.sick.com/Roller\\_Sensor\\_Bar](http://www.sick.com/Roller_Sensor_Bar)
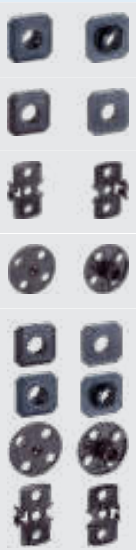
|                                                                                    | Brief description                                                                                                                                                                                                                                                                                                                                                                                                      | Type               | part no. |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------|
| Mounting systems                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |          |
|   | <ul style="list-style-type: none"> <li><b>Description:</b> 8 mm round adapter bracket with adhesive back</li> </ul>                                                                                                                                                                                                                                                                                                    | BEF-AP-RSBADHA     | 2127765  |
|                                                                                    | <ul style="list-style-type: none"> <li><b>Description:</b> Adapter bracket with adhesive back</li> </ul>                                                                                                                                                                                                                                                                                                               | BEF-AP-RSBADHB     | 2127766  |
|                                                                                    | <ul style="list-style-type: none"> <li><b>Description:</b> Adapter bracket to snap between hex sections</li> </ul>                                                                                                                                                                                                                                                                                                     | BEF-AP-RSBCON      | 2127768  |
|                                                                                    | <ul style="list-style-type: none"> <li><b>Description:</b> Hex adapter bracket</li> </ul>                                                                                                                                                                                                                                                                                                                              | BEF-AP-RSBHEX      | 2127767  |
|                                                                                    | <ul style="list-style-type: none"> <li><b>Description:</b> Adapter kit: BEF-AP-RSBADHA, BEF-AP-RSBADHB, BEF-AP-RSBCON, BEF-AP-RSBHEX</li> <li><b>Items supplied:</b> BEF-AP-RSBADHA, BEF-AP-RSBADHB, BEF-AP-RSBCON, BEF-AP-RSBHEX</li> </ul>                                                                                                                                                                           | BEF-AP-RSBKIT      | 2127759  |
| connectors and cables                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |          |
|  | <ul style="list-style-type: none"> <li><b>Connection type head A:</b> Male connector, M8, 4-pin, straight, A-coded</li> <li><b>Description:</b> Unshielded</li> <li><b>Connection systems:</b> Screw-type terminals</li> <li><b>Permitted cross-section:</b> 0.14 mm² ... 0.5 mm²</li> </ul>                                                                                                                           | STE-0804-G         | 6037323  |
|                                                                                    | <ul style="list-style-type: none"> <li><b>Connection type head A:</b> Female connector, M8, 4-pin, straight, A-coded</li> <li><b>Connection type head B:</b> Flying leads</li> <li><b>Signal type:</b> Sensor/actuator cable</li> <li><b>Cable:</b> 5 m, 4-wire, PVC</li> <li><b>Description:</b> Sensor/actuator cable, unshielded</li> <li><b>Application:</b> Zones with chemicals, Uncontaminated zones</li> </ul> | YF8U14-050VA3XLEAX | 2095889  |



## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)