AbN automation

STARPOWER

SEMICONDUCTOR **IGBT**

GD150CLY120C1S

1200V/150A chopper in one-package

General Description

STARPOWER IGBT Power Module provides ultra low conduction loss as well as short circuit ruggedness. They are designed for the applications such as general inverters and UPS.

Features

- Low $V_{CE(sat)}$ Trench IGBT technology
- 10μs short circuit capability
- $V_{CE(sat)}$ with positive temperature coefficient
- Maximum junction temperature 175°C
- Low inductance case
- Fast & soft reverse recovery anti-parallel FWD
- Isolated copper baseplate using DBC technology

Typical Applications

- Inverter for motor drive
- AC and DC servo drive amplifier
- Uninterruptible power supply

Equivalent Circuit Schematic

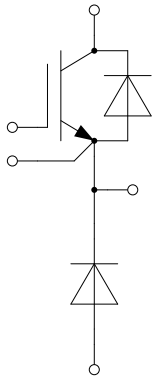

Absolute Maximum Ratings T_C=25°C unless otherwise noted

IGBT

Symbol	Description	Values	Unit
V_{CES}	Collector-Emitter Voltage	1200	V
V_{GES}	Gate-Emitter Voltage	±20	V
I_C	Collector Current @ T_C=25°C @ T_C=100°C	291 150	A
I_{CM}	Pulsed Collector Current t_p=1ms	300	A
P_D	Maximum Power Dissipation @ T_j=175°C	1102	W

Diode

Symbol	Description	Values	Unit
V_{RRM}	Repetitive Peak Reverse Voltage	1200	V
I_F	Diode Continuous Forward Current	150	A
I_{FM}	Diode Maximum Forward Current t_p=1ms	300	A

Module

Symbol	Description	Value	Unit
T_{jmax}	Maximum Junction Temperature	175	°C
T_{jop}	Operating Junction Temperature	-40 to +150	°C
T_{STG}	Storage Temperature Range	-40 to +125	°C
V_{ISO}	Isolation Voltage RMS,f=50Hz,t=1min	4000	V

AbN automation

IGBT Characteristics T_C=25°C unless otherwise noted

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$V_{CE(sat)}$	Collector to Emitter Saturation Voltage	I_C=150A,V_{GE}=15V, T_j=25°C		1.70	2.15	V
		I_C=150A,V_{GE}=15V, T_j=125°C		1.95		
		I_C=150A,V_{GE}=15V, T_j=150°C		2.00		
$V_{GE(th)}$	Gate-Emitter Threshold Voltage	I_C=3.75mA,V_{CE}=V_{GE}, T_j=25°C	5.2	6.0	6.8	V
I_{CES}	Collector Cut-Off Current	V_{CE}=V_{CES},V_{GE}=0V, T_j=25°C			1.0	mA
I_{GES}	Gate-Emitter Leakage Current	V_{GE}=V_{GES},V_{CE}=0V, T_j=25°C			400	nA
R_{Gint}	Internal Gate Resistance			2.0		Ω
C_{ies}	Input Capacitance	V_{CE}=25V,f=1MHz, V_{GE}=0V		15.5		nF
C_{res}	Reverse Transfer Capacitance			0.44		nF
Q_G	Gate Charge	V_{GE}=-15…+15V		1.17		μC
$t_{d(on)}$	Turn-On Delay Time	V_{CC}=600V,I_C=150A, R_G=1.1Ω,V_{GE}=±15V, T_j=25°C		123		ns
t_r	Rise Time			27		ns
$t_{d(off)}$	Turn-Off Delay Time			407		ns
t_f	Fall Time			66		ns
E_{on}	Turn-On Switching Loss			5.4		mJ
E_{off}	Turn-Off Switching Loss			11.0		mJ
$t_{d(on)}$	Turn-On Delay Time	V_{CC}=600V,I_C=150A, R_G=1.1Ω,V_{GE}=±15V, T_j=125°C		139		ns
t_r	Rise Time			32		ns
$t_{d(off)}$	Turn-Off Delay Time			495		ns
t_f	Fall Time			116		ns
E_{on}	Turn-On Switching Loss			9.6		mJ
E_{off}	Turn-Off Switching Loss			16.5		mJ
$t_{d(on)}$	Turn-On Delay Time	V_{CC}=600V,I_C=150A, R_G=1.1Ω,V_{GE}=±15V, T_j=150°C		144		ns
t_r	Rise Time			32		ns
$t_{d(off)}$	Turn-Off Delay Time			528		ns
t_f	Fall Time			138		ns
E_{on}	Turn-On Switching Loss			10.7		mJ
E_{off}	Turn-Off Switching Loss			17.6		mJ
I_{SC}	SC Data	t_P≤10μs,V_{GE}=15V, T_j=150°C,V_{CC}=900V, V_{CEM}≤1200V		600		A

Diode Characteristics T_C=25°C unless otherwise noted

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
V_F	Diode Forward Voltage	I_F=150A,V_{GE}=0V,T_i=25°C		1.65	2.10	V
		I_F=150A,V_{GE}=0V,T_j=125°C		1.65		
		I_F=150A,V_{GE}=0V,T_i=150°C		1.65		
Q_r	Recovered Charge	V_R=600V,I_F=150A, -di/dt=5800A/μs,V_{GE}=-15V T_j=25°C		13.3		μC
I_{RM}	Peak Reverse Recovery Current			209		A
E_{rec}	Reverse Recovery Energy			6.7		mJ
Q_r	Recovered Charge	V_R=600V,I_F=150A, -di/dt=5800A/μs,V_{GE}=-15V T_j=125°C		23.8		μC
I_{RM}	Peak Reverse Recovery Current			228		A
E_{rec}	Reverse Recovery Energy			10.9		mJ
Q_r	Recovered Charge	V_R=600V,I_F=150A, -di/dt=5800A/μs,V_{GE}=-15V T_j=150°C		26.6		μC
I_{RM}	Peak Reverse Recovery Current			238		A
E_{rec}	Reverse Recovery Energy			12.8		mJ

Module Characteristics T_C=25°C unless otherwise noted

Symbol	Parameter	Min.	Typ.	Max.	Unit
L_{CE}	Stray Inductance			30	nH
$R_{CC'+EE'}$	Module Lead Resistance, Terminal to Chip		0.75		mΩ
R_{thJC}	Junction-to-Case (per IGBT) Junction-to-Case (per Diode)			0.136 0.313	K/W
R_{thCH}	Case-to-Heatsink (per IGBT) Case-to-Heatsink (per Diode) Case-to-Heatsink (per Module)		0.093 0.215 0.050		K/W
M	Terminal Connection Torque, Screw M5 Mounting Torque, Screw M6	2.5 3.0		5.0 5.0	N.m
G	Weight of Module		150		g

AbN automation

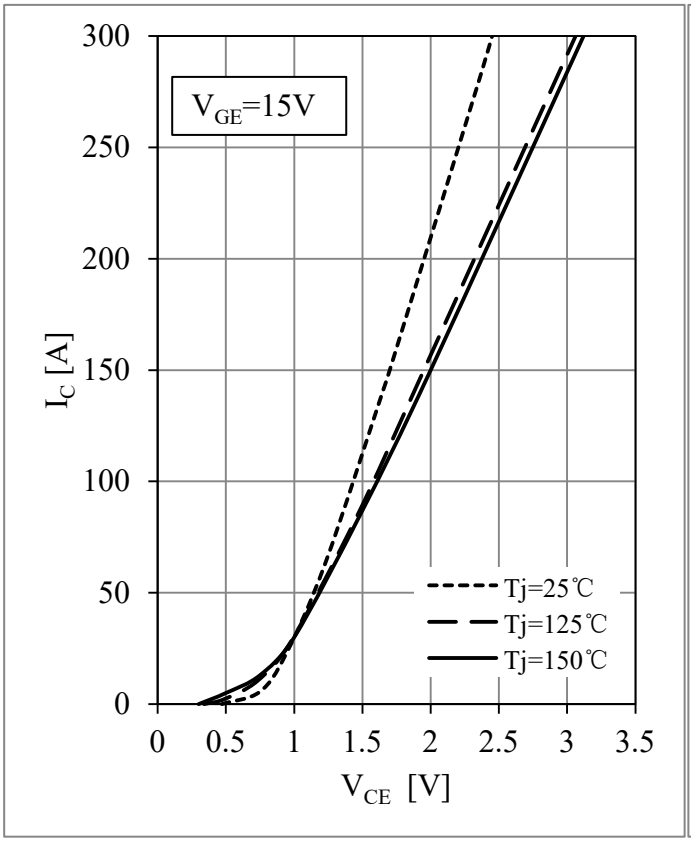

Fig 1. IGBT Output Characteristics

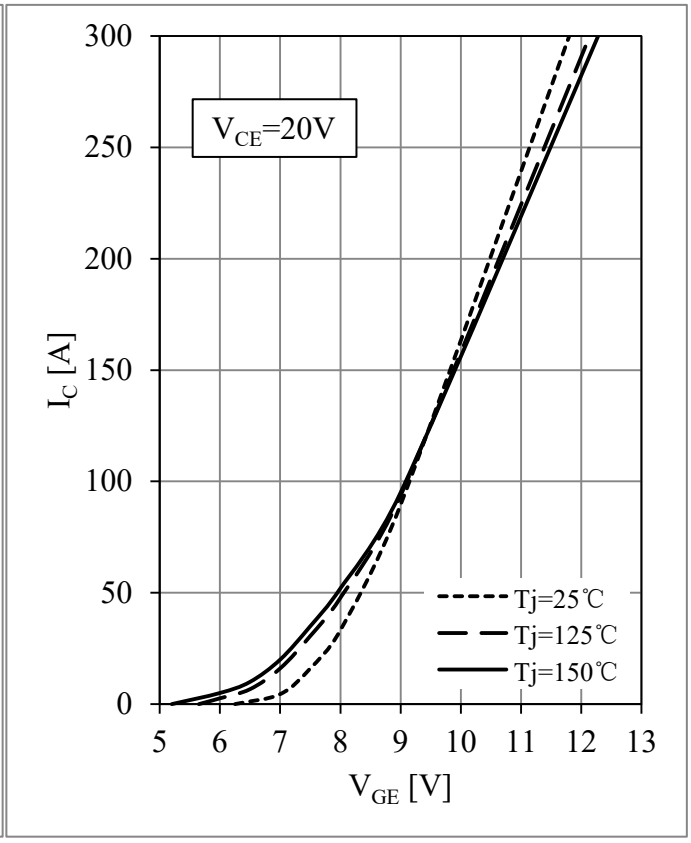

Fig 2. IGBT Transfer Characteristics

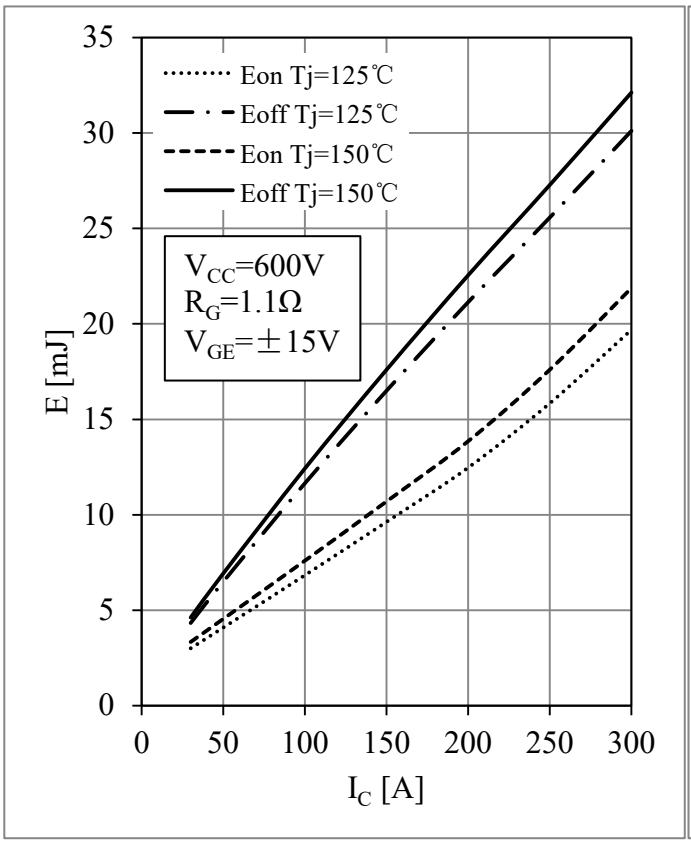

Fig 3. IGBT Switching Loss vs. I_C

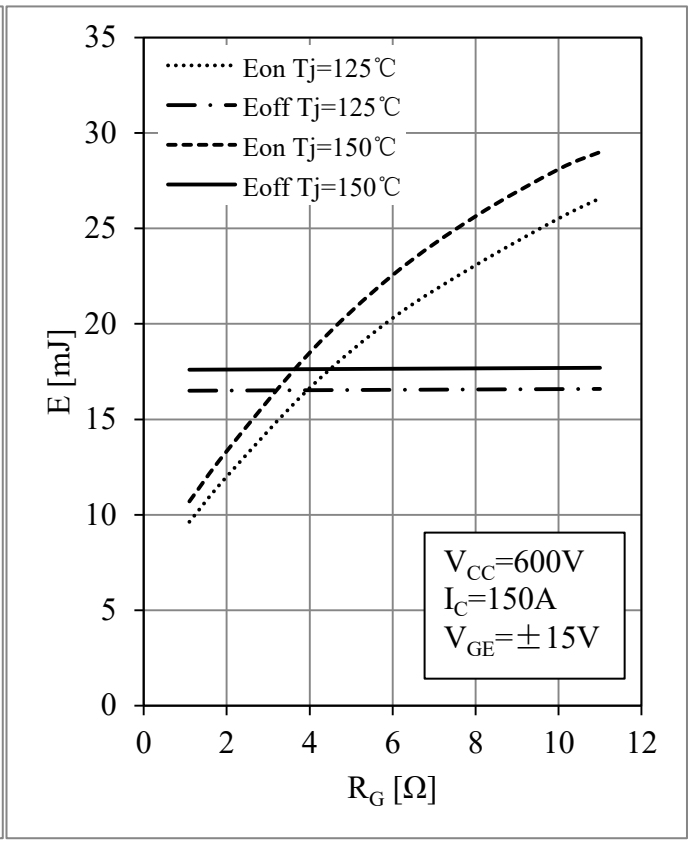

Fig 4. IGBT Switching Loss vs. R_G

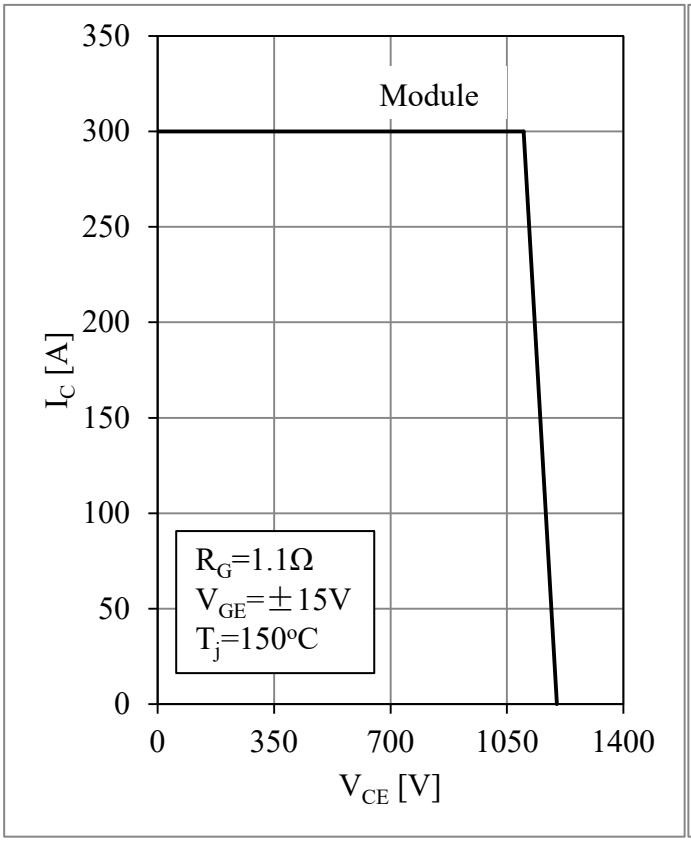

Fig 5. RBSOA

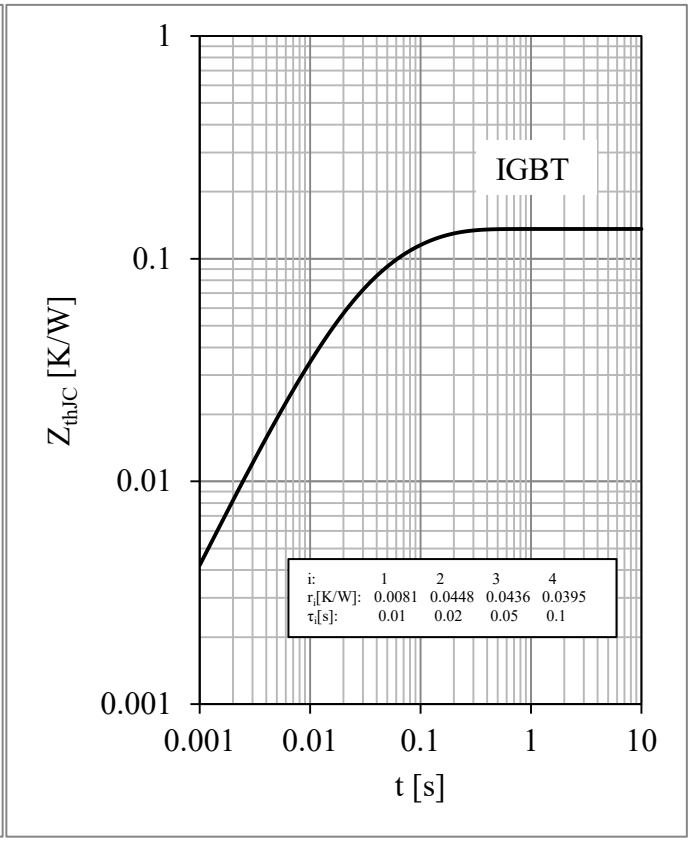

Fig 6. IGBT Transient Thermal Impedance

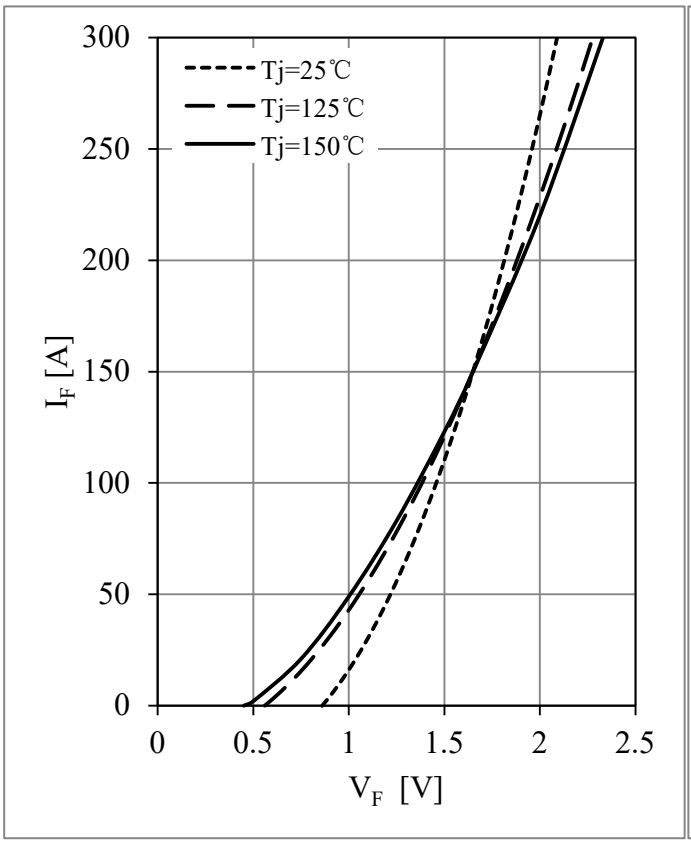

Fig 7. Diode Forward Characteristics

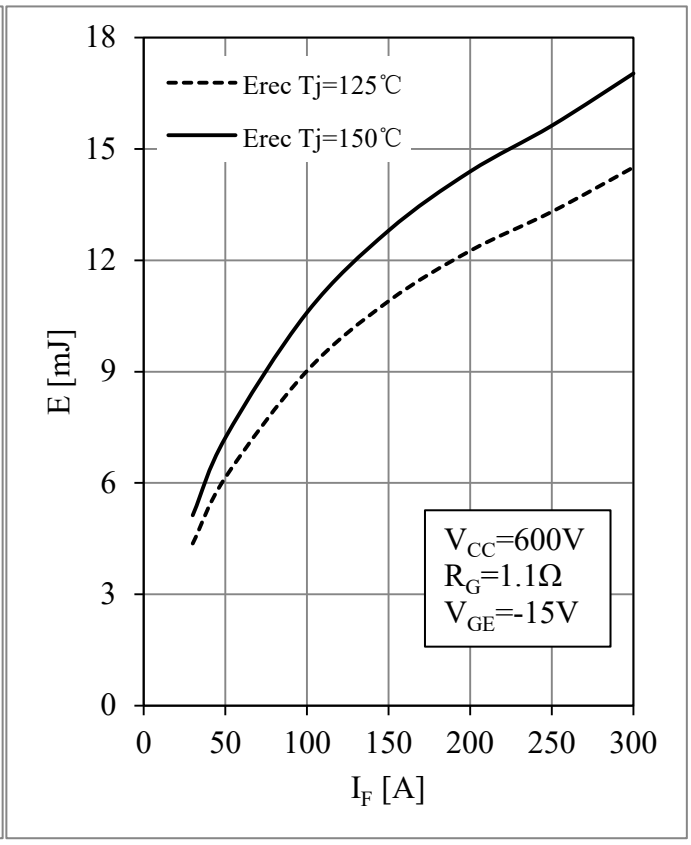

Fig 8. Diode Switching Loss vs. I_F

AbN automation

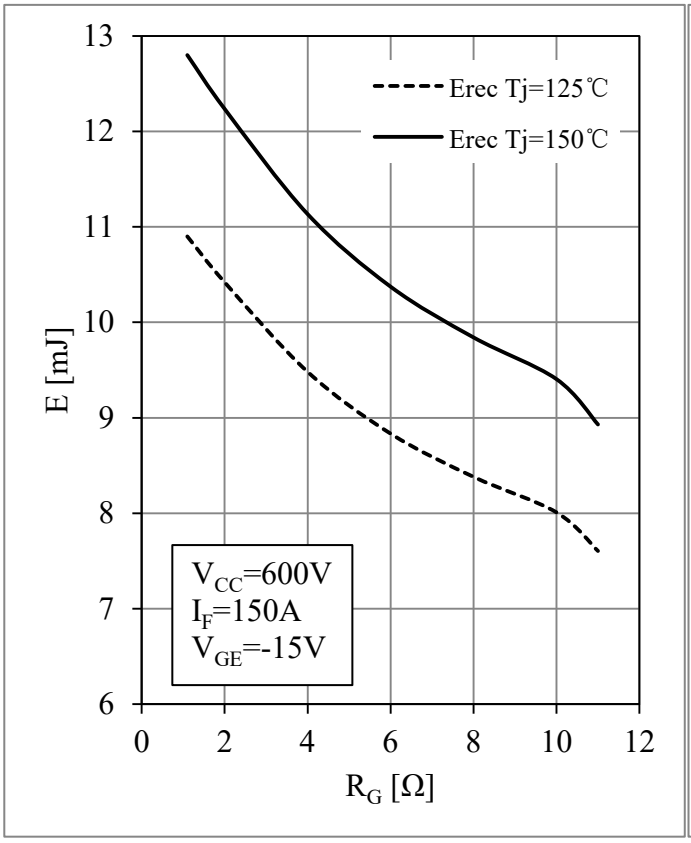

Fig 9. Diode Switching Loss vs. R_G

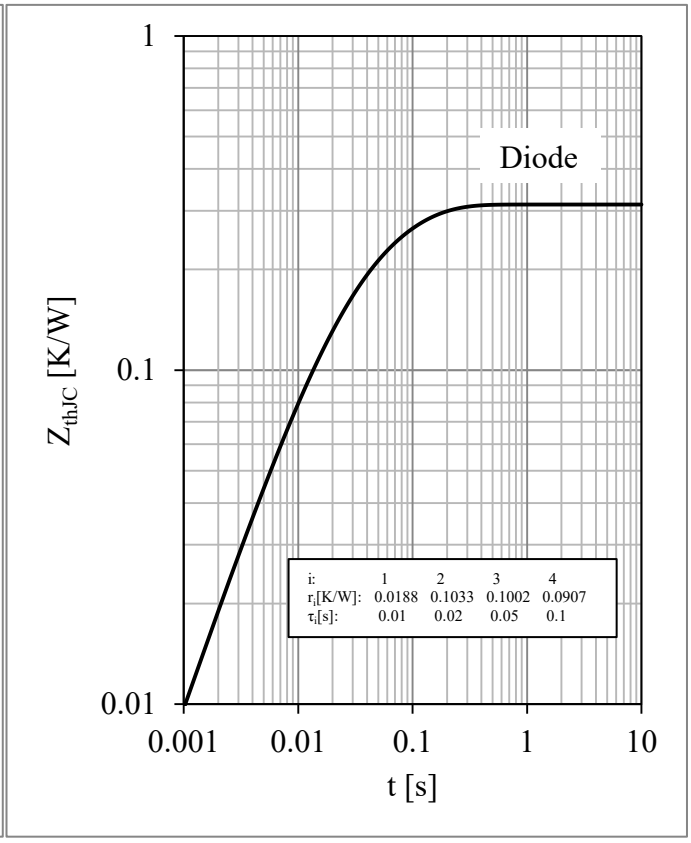

Fig 10. Diode Transient Thermal Impedance

Circuit Schematic

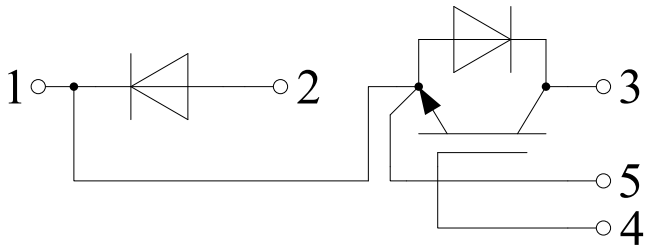

Package Dimensions

Dimensions in Millimeters

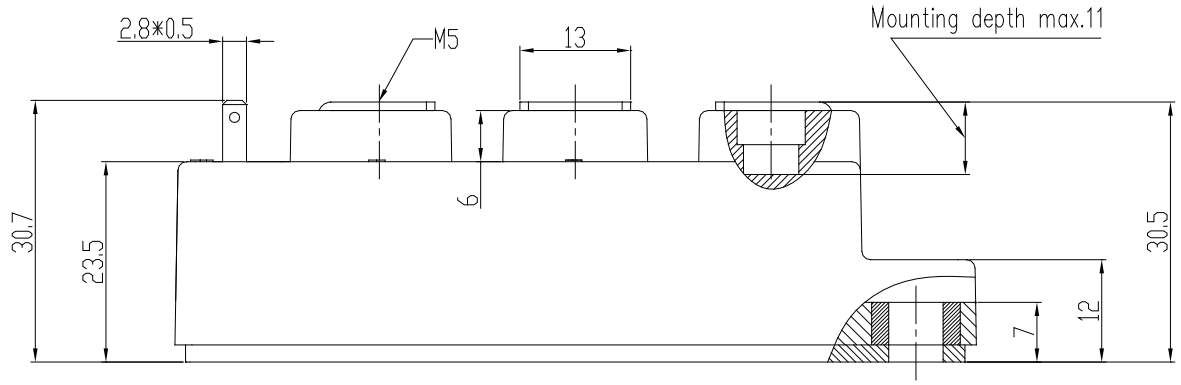

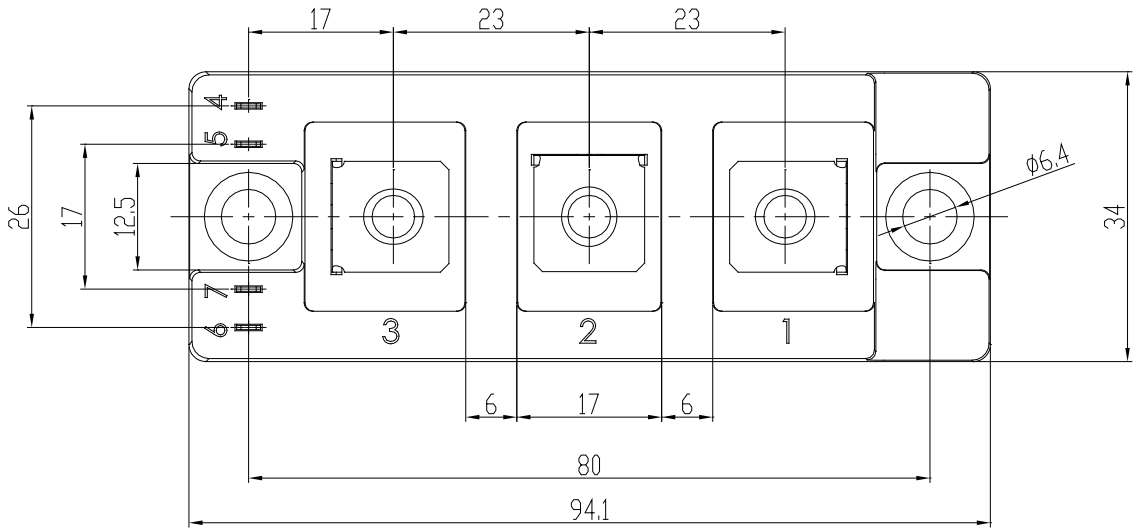

AbN automation

Terms and Conditions of Usage

The data contained in this product datasheet is exclusively intended for technically trained staff. you and your technical departments will have to evaluate the suitability of the product for the intended application and the completeness of the product data with respect to such application.

This product data sheet is describing the characteristics of this product for which a warranty is granted. Any such warranty is granted exclusively pursuant the terms and conditions of the supply agreement. There will be no guarantee of any kind for the product and its characteristics.

Should you require product information in excess of the data given in this product data sheet or which concerns the specific application of our product, please contact the sales office, which is responsible for you (see www.powersemi.cc), For those that are specifically interested we may provide application notes.

Due to technical requirements our product may contain dangerous substances. For information on the types in question please contact the sales office, which is responsible for you.

Should you intend to use the Product in aviation applications, in health or live endangering or life support applications, please notify.

If and to the extent necessary, please forward equivalent notices to your customers.
Changes of this product data sheet are reserved.