

Varistar CP Seismic Enclosures

CONNECT AND PROTECT

FOR SENSITIVE ELECTRONICS IN RUGGED ENVIRONMENTS

nVent SCHROFF VARISTAR CP SEISMIC ENCLOSURES

Cabinet designed to protect electronics, network, fiber interconnect and telephone equipment in rugged environments such as seismic zones.



Static load of
500 kg/1100 lbs



Tested to Telcordia
GR63 Zone 4



Welded brackets



(EMI/EMC)
tested to 18 GHz



Fire Safe gaskets
and powder coating



Water and dust
ingress up to IP55

ADVANTAGES AND FEATURES

- Sturdy Construction:** tested per Telcordia standards up to 500kg/1100lbs load
- Shock protection:** Tested to Telcordia GR-63-CORE Zone 4 and Network Equipment Building System (NEBS) Certified
- Seismic Protection:** Reinforcement brackets welded to the standard Varistar CP frame enable scalable and cost optimized seismic protection
- Electromagnetic Interference:** (EMI/EMC) tested to 18GHz, per EN 61000-5-7 and IEC 61587-3
- All Around Protection:** Water and dust ingress up to IP55 per IEC 60529 & Fire Safe gaskets and powder coating, certified to EN45545

ORDER INFORMATION

CABINET	DESCRIPTION	MODEL NUMBER	
Varistar CP Seismic Heavy Load	Varistar CP Seismic Heavy Load Cabinet, Bellcore Zone 4, EMC, 2100H 600W 600D	10630-048	Tested to Telcordia GR-63-CORE Zone 4 (2017) with 500 Kg dummy weight on the 19" slide mount
Varistar CP Seismic	Varistar CP Seismic Cabinet, Bellcore Zone 4, EMC, 2100H 600W 600D	10630-050	Tested to Telcordia GR-63-CORE Zone 4 (2017) with 250 Kg dummy weight on the 19" slide mount


Design your customized robust steel-framed electronic / server cabinet with integrated electromechanical accessories using our

[ONLINE 3D CONFIGURATOR.](#)


VARISTAR CP – MORE VARISTAR THAN EVER

More robust, more versatile, more secure, more industry compliant

Reinforcements built of 4 mm thick DD11 steel to ensure competitive cost and rugged performance with 250 kg loading in seismic regions. Vertical reinforcement brackets join in the middle of the frame height, with small stiffening angles at top and bottom

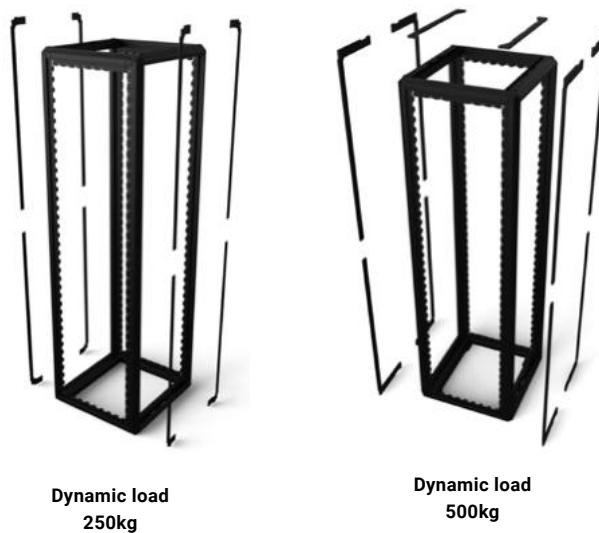

Seismic doors equipped with reinforced 2.5 mm thick brackets, replacing standard door bar profiles, ensuring high rigidity to sustain earthquake tremors

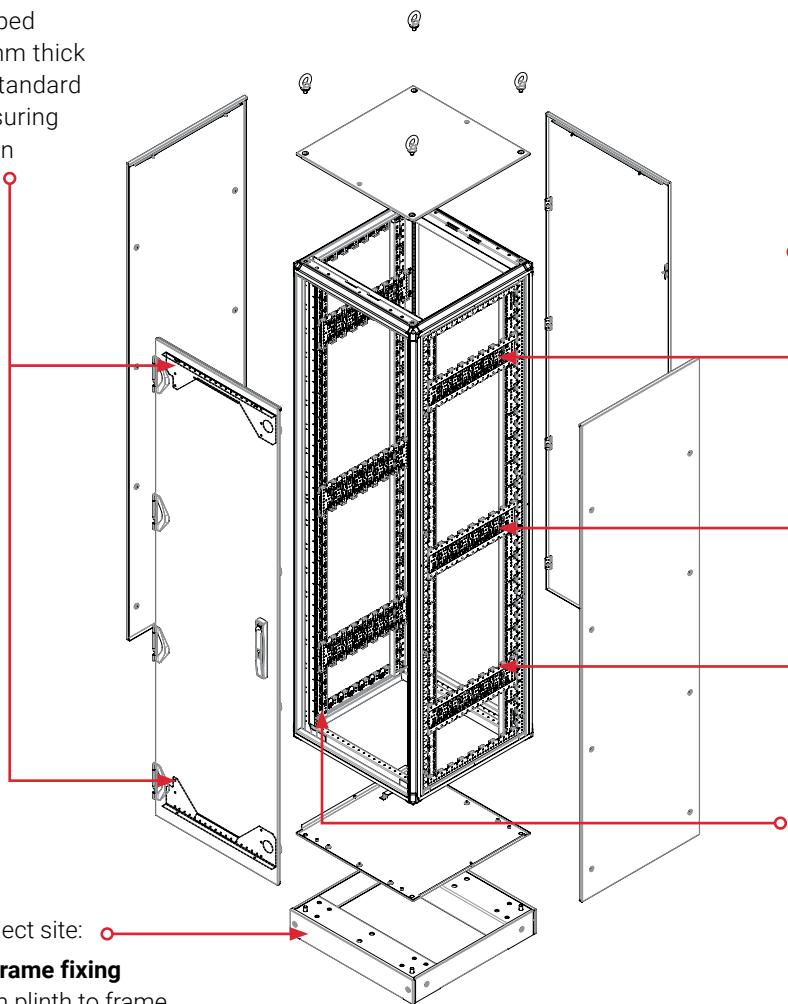

Easy mounting at project site:

1. Flexible plinth-to-frame fixing

- M12 screws from plinth to frame
- M10 screws & nut from frame to plinth

2. High accessibility plinth-to-floor fixing

- Can be done from inside or outside
- Error free installation using oblong holes in the bottom

Reinforcements built of 10 mm thick S700MC fine grain structural steel, with extremely high yield strength to ensure 500 kg loading in earthquake prone environments.

L-shaped vertical reinforcements in the front and rear cover the height and width and join in the middle. Horizontal reinforcements on top provide extra rigidity to the frame


Varistar SEISMIC cabinets are mounted with seismic 2 mm thick steel depth members to provide additional sturdiness to the frame while also allowing cable management and other fixation points in the cabinet

Varistar CP Seismic frame has multiple fixing points designed in the roll formed structure, allowing components and cable management accessories to be directly fixed on it.

WIDE ARRAY OF STANDARD TOP COVERS AND BASE PLATES

IP20, IP55, and EMC top covers and base plates are pre-designed for all dimensions

AbN
automation

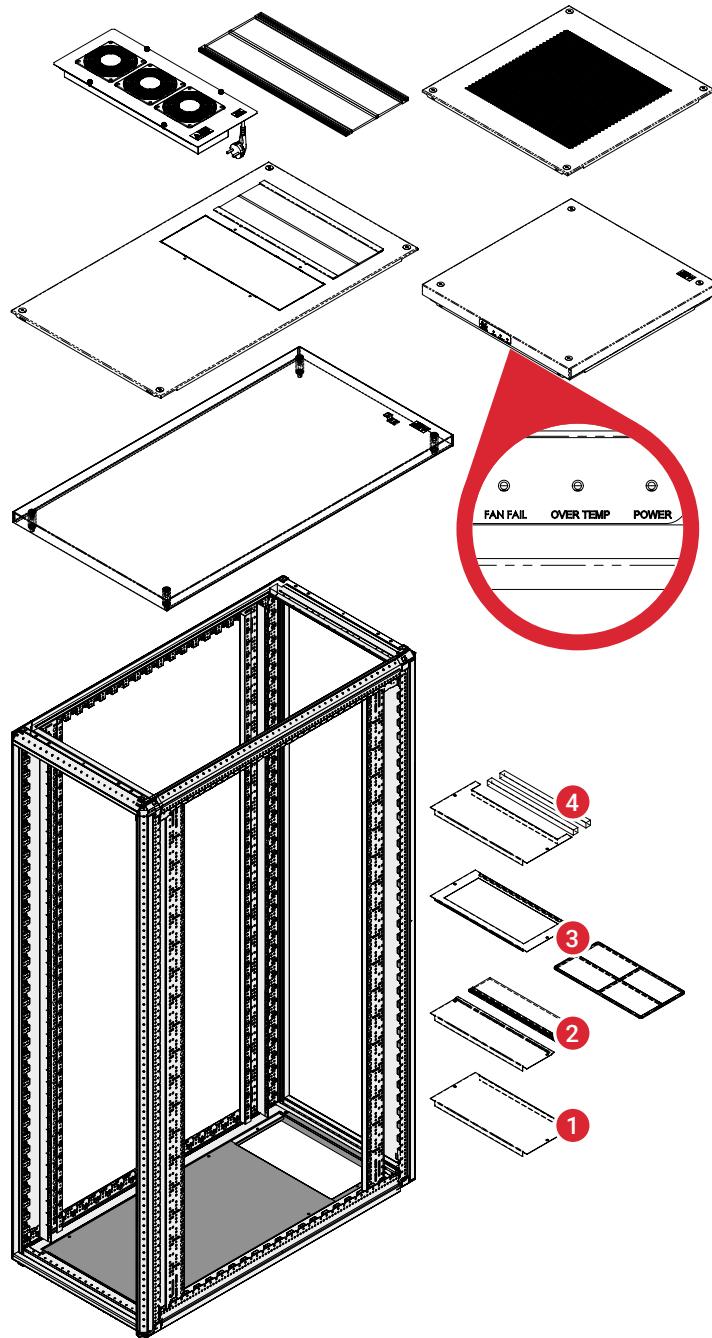

Seismic cabinets can be easily designed using the **pre-designed standard parts** to achieve the quickest delivery times.

Broad array of configurable top covers


IP20, IP5 and EMC top covers are pre-designed for all dimensions

The top covers with cut outs can be populated with:

1. Perforated cover – for ventilated top cover for passive cooling
2. Brush strip – for dust free cable routing through the top cover
3. Fan Inserts – with 3 axial fans per unit regulated via a Thermostat

Multi-piece base plate

Multi-piece base panels/base plates are placed from within the cabinet. They are used when the customer needs to open and close the base panel during mounting or operation.

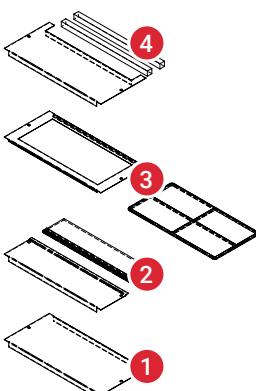

Multiple closing panel options include:

1. **Cover Plate:** If no cable management is needed
2. **Brush Strip:** For dustproof cable management
3. **Dust Filter Set:** For dustproof cabinet interiors with ventilation.
PS: Filter replacement is ecological as you throw away only the filter mat and not the complete frame
4. **IP55 cable entry:** For IP55 compliant cable management

One-piece base plate

One-piece base panels/base plates are mounted from outside the cabinet. They generally come mounted from the factory. There is a wide variety of individual project specifications.

1. **IP55** - With and without cable entry
2. **EMC** - With and without cable entry, with and without perforations

NORTH AMERICA

All locations
Tel.: +1.800.525.4682

EUROPE

Germany
Tel.: +49.7082.794.0
France
Tel.: +33.3.88.90.64.90
Poland
Tel.: +48.22.209.98.35
Italy
Tel.: +39.02.932.714.1

ASIA/PACIFIC

VR China
Tel.: +86.21.2412.6943
Singapore
Tel.: +65.6768.5800
Japan
Tel.: +81.45.476.0271

MIDDLE EAST & INDIA

United Arab Emirates
Tel.: +971.4.823.8666
India
Tel.: +91.80.6715.2001
Turkey
Tel.: +90.541.3680941



Our powerful portfolio of brands:

CADDY **ERIC** **HOFFMAN** **ILSCO** **RAYCHEM** **SCHROFF**