




Varistar CP Stand-Alone Server Rack

10630-018

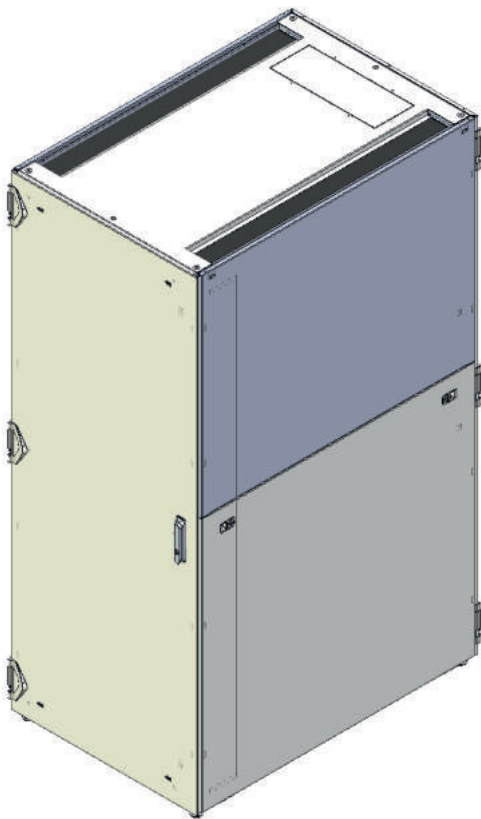

Position adjustable feet

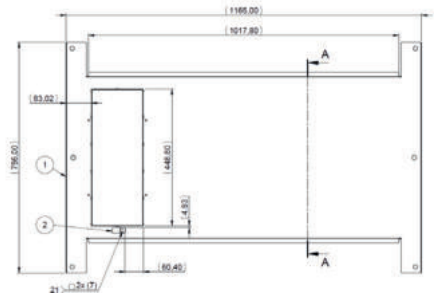

Cable entry top cover

TECHNICAL DATA

Depth: 1,200 mm
Height: 2,000 mm/42U
Width: 800 mm
Version: Stand-alone

Delivery comprises:

| Item | Quantity | Description |
|------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | 1 | Welded basic frame (CP) sheet metal profile with all-round meandering in 25 mm grid increments for M6 taptite screws and/or M5 cage nuts has a static load-carrying capacity of max. 1,600 kg and 1,000 kg dynamic, RAL 7021 |
| 2 | 1 | Top cover, RAL 7021 in steel plate 1.5 mm with cut-outs for cable entry |
| 3 | 1 | Brush strip set fitted in cut-out zone rear rear and left/right side |
| 4 | 1 | Front door, perforated, steel, with 180° hinges, 3-point locking and lever handle, 1333 locking cylinder, color RAL 7021 |
| 5 | 1 | Rear double door, steel, with 180° hinges and perforation, 3-point locking and lever handle 1333 locking cylinder, color RAL 7021 |
| 6 | 2 | Side panels with quick-release fastener, divided, 1 mm steel |
| 7 | 4 | 19" panel/slide mounts, steel, mounted in 740 mm intervals, with U marking, color RAL 7021, panel/slide mounts can be recessed in 25 mm steps |
| 8 | 4 | Cross member, 2.5 mm steel (to accept 19" panel/slide mounts in 800 mm wide cabinets) |
| 9 | 2 | Air blanking panels with cut outs and brushes (2U – 19"), 1.5 mm steel, gasket material |
| 10 | 4 | Adjustable foot |
| 11 | 1 | Panel bottom to seal the gap front side under the cabinet for containment integration |
| 12 | 1 | Earthing kit, assembled |