

## Roof mounted filter fan



### Description


|                            |                                                                            |
|----------------------------|----------------------------------------------------------------------------|
| <b>Order Number:</b>       | 6064D2000                                                                  |
| <b>Colour:</b>             | RAL 7035                                                                   |
| <b>Housing Material:</b>   | Mild steel, powder coated                                                  |
| <b>Ingress Protection:</b> | IP 54, Type 1, 12                                                          |
| <b>Included:</b>           | G3 filters                                                                 |
| <b>Optional:</b>           | Aluminium filter kit<br>Temperature control thermostat<br>Alarm thermostat |
| <b>Approvals:</b>          | CE, cURus                                                                  |

## Technical Data

|                                              |                             |
|----------------------------------------------|-----------------------------|
| <b>Operating Temperature Range:</b>          | -10°C - 55°C                |
| <b>Air flow volume (system / unimpeded):</b> | 320 m³/h                    |
| <b>Air flow unimpeded:</b>                   | 275 m³/h                    |
| <b>Static pressure:</b>                      | 79 Pa                       |
| <b>Mounting:</b>                             | top mounted                 |
| <b>Dimensions A x B x C (D+E):</b>           | 147 x 457 x 457 mm          |
| <b>Weight:</b>                               | 5.8 kg                      |
| <b>Cut out dimensions:</b>                   | 291 x 291 mm                |
| <b>Voltage / Frequency:</b>                  | 24 V DC                     |
| <b>Rated current:</b>                        | 0.84 A                      |
| <b>Power consumption:</b>                    | 20 W                        |
| <b>Degree of separation:</b>                 | 85% - DIN 24185             |
| <b>Filter class:</b>                         | G3 (Aluminium optional)     |
| <b>Noise level:</b>                          | 51 dB(A)                    |
| <b>Connection:</b>                           | 4 pole connector (provided) |

Please click on the graphics to download.  
 More CAD drawings can be found under [Product Download](#).  
 > [Overview Product Group Filter fans & exhaust filters](#)

**Cut Out Dimension:**

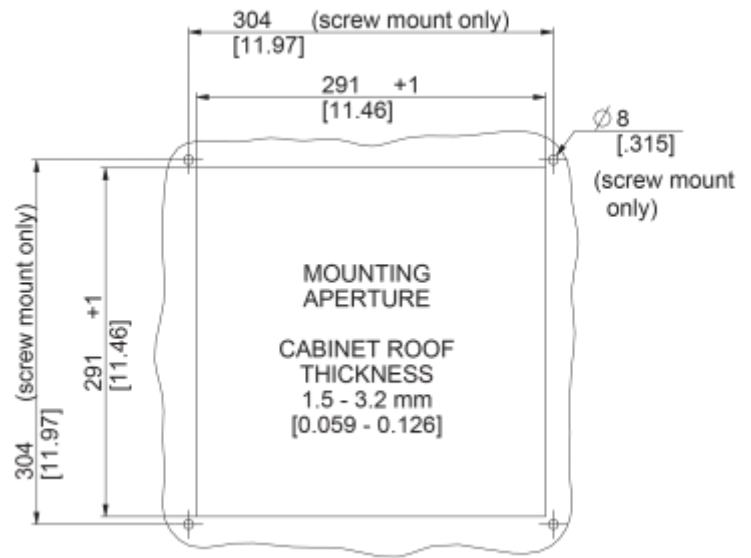

[click image to enlarge](#)

## Order Information

|                   |               |
|-------------------|---------------|
| <b>Taric code</b> | 84145915      |
| <b>GTIN (EAN)</b> | 5350604100893 |