

## Pre-set thermostat NC



### Description


|                            |                            |
|----------------------------|----------------------------|
| <b>Order Number:</b>       | 301020                     |
| <b>Colour:</b>             | Grey RAL 7011              |
| <b>Housing Material:</b>   | PC plastic                 |
| <b>Ingress Protection:</b> | IP 20                      |
| <b>Note:</b>               | Hyst.10±2K / Sw.Pt.tol ±2K |
| <b>Approvals:</b>          | CE, cURus                  |
| <b>UL File Number:</b>     | E358385                    |

## Technical Data


|                                     |                                                                                                                                |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| <b>Operating Temperature Range:</b> | -40°C - +80°C                                                                                                                  |
| <b>Setting range:</b>               | OFF 25°C/77°F - ON 15°C/59°F                                                                                                   |
| <b>Mounting:</b>                    | DIN Rail 35 mm                                                                                                                 |
| <b>Dimensions A x B x C (D+E):</b>  | 60 x 39 x 38.9 mm                                                                                                              |
| <b>Weight:</b>                      | ~ 50 g                                                                                                                         |
| <b>Voltage / Frequency:</b>         | max. 250 V AC 16 A(res) / 10 A(ind)<br>max. 72 V DC max. 30 W                                                                  |
| <b>Lifetime:</b>                    | 100,000 hrs.                                                                                                                   |
| <b>Connection:</b>                  | 2-pole terminal, clamping torque 0.5 Nm max.<br>solid wire - 2.5 mm <sup>2</sup> max. stranded wire - 1.5 mm <sup>2</sup> max. |

Please click on the graphics to download.  
More CAD drawings can be found under [Product Download](#).  
> [Overview Product Group Thermal Controls / Accessories](#)

**Cut Out Dimension:**

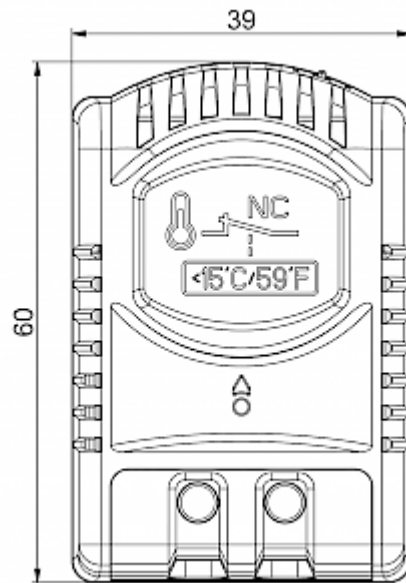

[click image to enlarge](#)

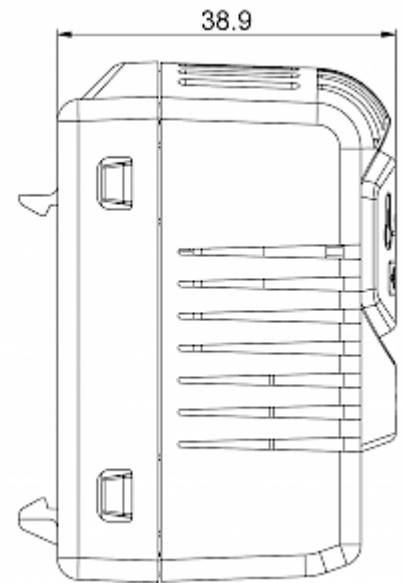

## Order Information

|                   |               |
|-------------------|---------------|
| <b>Taric code</b> | 90321089      |
| <b>GTIN (EAN)</b> | 5350604010048 |