

Cooling unit NEMA / type 4X



Description

Order Number:	57262162
Housing Material:	Stainless steel AISI 304 (V2A)
Ingress Protection:	IP 56 / Type 12, 3, 3R, 4, 4X
SK notes:	with heater with metal filter
Approvals:	CE, cURus, cULus
UL File Number:	cURus (SA32278), cULus (E498756)


Technical Data

Cooling capacity L35L35:	2.5 kW @ 50 Hz 2.5 kW @ 60 Hz
Cooling capacity L35L50:	1.97 kW @ 50 Hz 2.04 kW @ 60 Hz
Enclosure heater:	1,500 W
Compressor type:	Rotary piston compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	950 g / 33.5 oz
High / low Pressure:	29.3 / 6.1 bar 425 / 88 psig
Operating Temperature Range:	-40°C - 55°C
Air flow volume (system / unimpeded):	Ambient air circuit: 765 / 1200 m³/h Cabinet air circuit: 950 / 1200 m³/h
Mounting:	Wall mounted
Dimensions A x B x C (D+E):	1,550 x 457 x 355 mm
Weight:	80 kg
Voltage / Frequency:	400/460 V - 50/60 Hz 2~
UL Voltage / Frequency:	400/460 V ~ 60 Hz 2~
Current L35L35:	2.9 A @ 50 Hz 2.6 A @ 60 Hz
Starting current:	6.1 A / 6.8 A
Max. current:	3.6 A / 3.2 A
Nominal power L35L35:	940 W @ 50 Hz 1.18 kW @ 60 Hz
Max. power:	1,30 kW @ 50Hz 1,64 kW @ 60 Hz
Fuse:	2 x 9 A (T)
Short-circuit current rating:	5 kA
Connection:	Connection terminal block

Please click on the graphics to download.
 More CAD drawings can be found under [Product Download](#).


> [Overview Product Group Cooling Units Outdoor / Type 4X](#)

Performance graph:

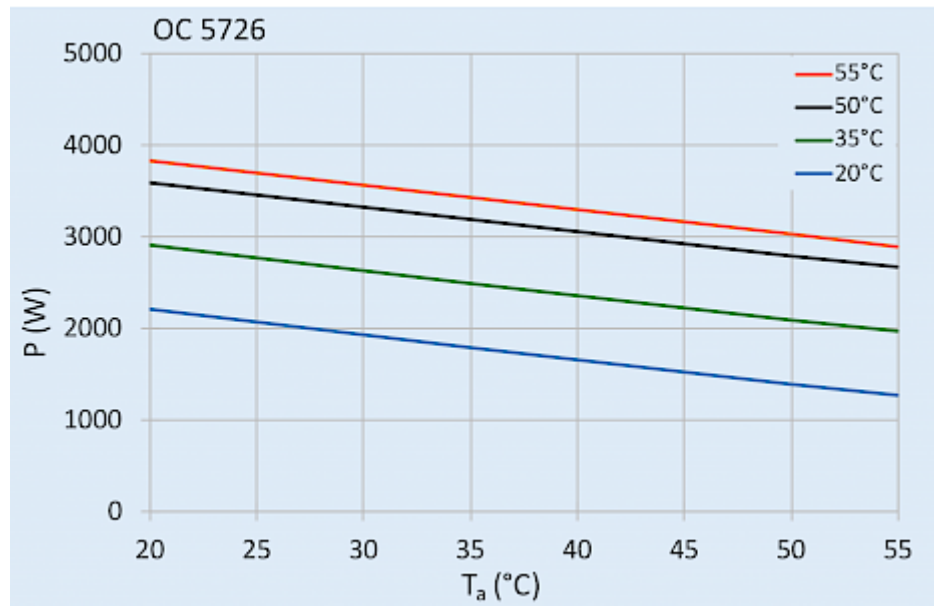

[click image to enlarge](#)

Cut Out Dimension:

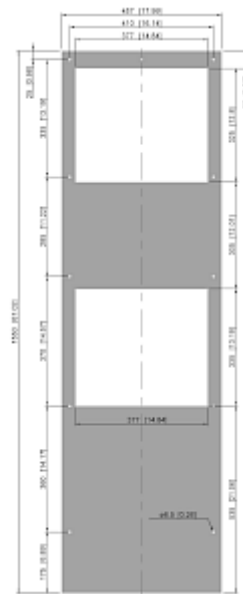

[click image to enlarge](#)

Order Information

In stainless steel 304 (V2A) part no.	57262062
In stainless steel 316 (V4A) part no.	57262064
In stainless steel 304 (V2A) with 1,500 W enclosure heater part no.	57262162
In stainless steel 316 (V4A) with 1,500 W enclosure heater part no.	57262164
Box dimensions	1,590 x 503 x 395 mm
Gross weight	84 kg
Taric code	84158200