

Air / Water Heat Exchanger



Description

Order Number:	2300010
Colour:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress Protection:	IP 55
Approvals:	CE

Technical Data


Cooling capacity L35W10 (200 l/h):	350 W
Coolant:	Water, light oils or similar
Operating Temperature Range:	1°C - 65°C
Air flow volume (system / unimpeded):	74 / 215 m³/h @ 50 Hz 85 / 240 m³/h @ 60 Hz
Mounting:	Wall mounted / internal
Dimensions A x B x C (D+E):	303 x 153 x 84 mm
Weight:	3.2 kg
Voltage / Frequency:	230 V ~ 50/60 Hz
Starting current:	0.35 A
Max. current:	0.24 A
Max. power:	37 W
Pressure water circuit:	10 bar
Water connection:	Rp 1/4" - inside thread with 2 connectors for pipe internal diameter of 13mm
Fuse:	4 A (T)
Connection:	Terminal connections

Please click on the graphics to download.

More CAD drawings can be found under [Product Download](#).


> [Overview Product Group Air / water heat exchangers](#)

Performance graph:

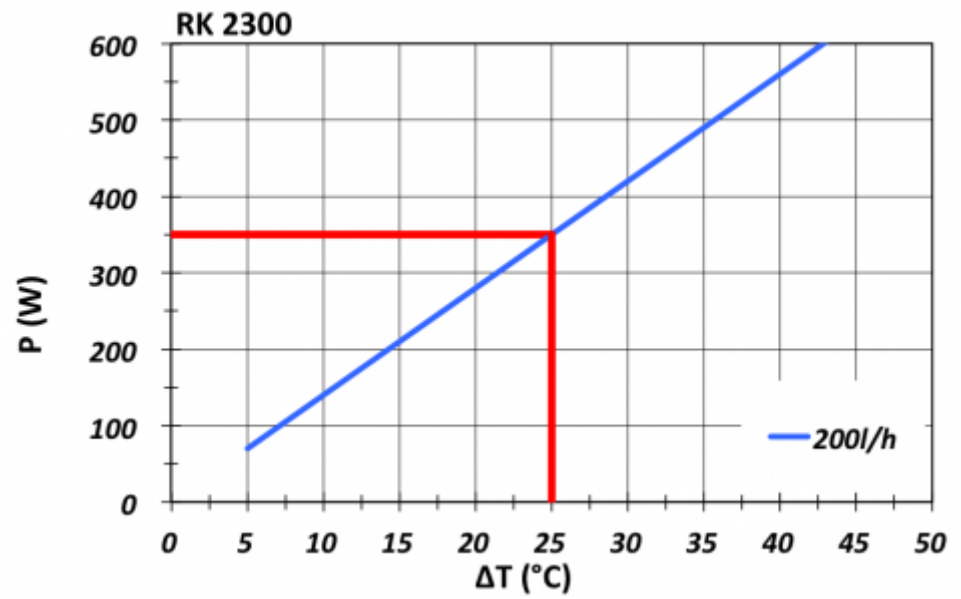

[click image to enlarge](#)

Air flow:

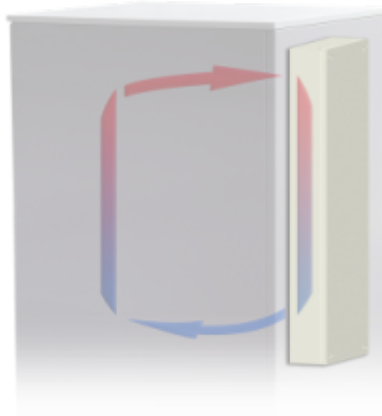

[click image to enlarge](#)

Order Information

Stainless steel housing part no.	2300012
Box dimension	408.6 x 169 x 120.5 mm
Gross weight	5 kg
Taric code	84158300
GTIN (EAN)	5350604210004