

Air / Water Heat Exchanger



Description


Order Number:	2300110
Colour:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress Protection:	IP 55
Approvals:	CE

Technical Data

Cooling capacity L35W10 (200 l/h):	350 W
Coolant:	Water, light oils or similar
Operating Temperature Range:	1°C - 65°C
Air flow volume (system / unimpeded):	85 / 240 m³/h
Mounting:	Wall mounted / internal
Dimensions A x B x C (D+E):	303 x 153 x 84 mm
Weight:	4.5 kg
Voltage / Frequency:	120 V ~ 60 Hz
Starting current:	0.74 A
Max. current:	0.49 A
Max. power:	38 W
Pressure water circuit:	10 bar
Water connection:	Rp 1/4" - inside thread with 2 connectors for pipe internal diameter of 13mm
Fuse:	4 A (T)
Connection:	Terminal connections


Please click on the graphics to download.
 More CAD drawings can be found under [Product Download](#).
 > [Overview Product Group Air / water heat exchangers](#)

Performance graph:

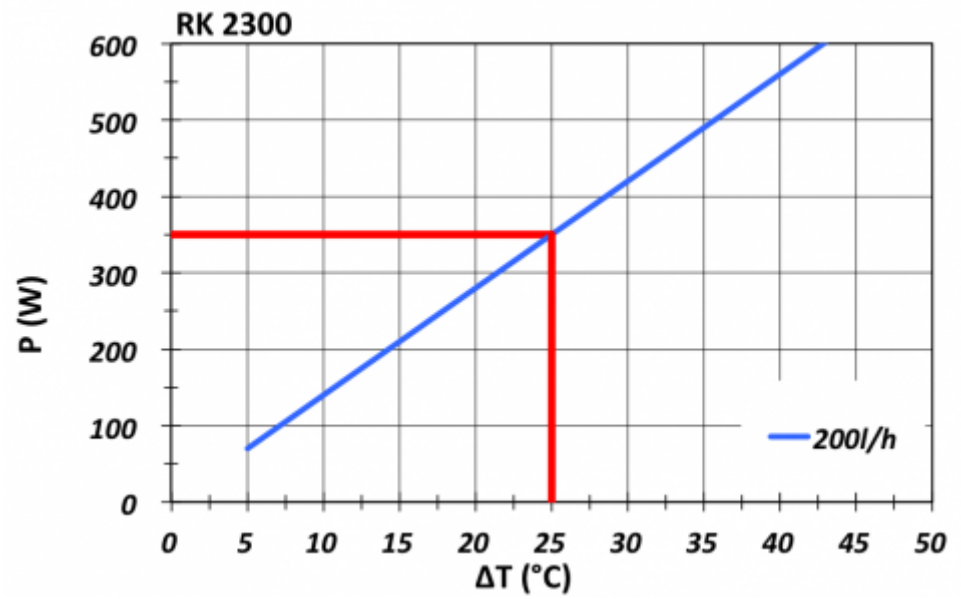


[click image to enlarge](#)

Air flow:

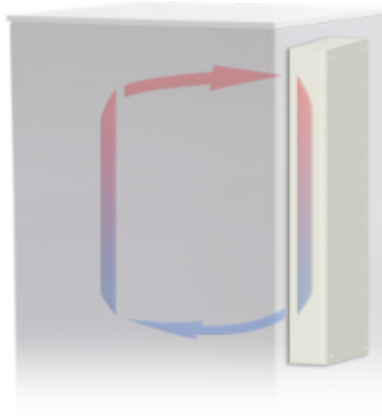

[click image to enlarge](#)

Cut Out Dimension:

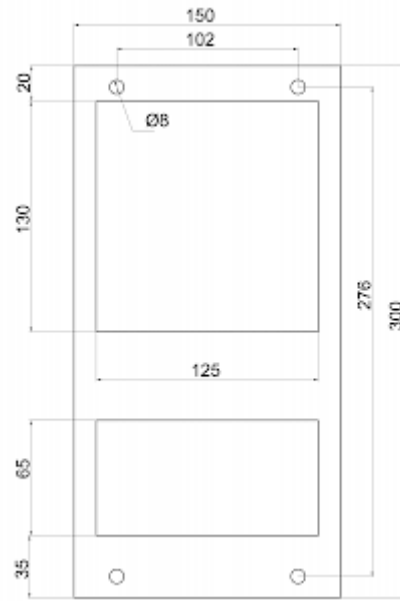

click image to enlarge

Order Information

Stainless steel housing part no.	2300112
Box dimension	408.6 x 169 x 120.5 mm
Gross weight	5.3 kg
Taric code	84158300
GTIN (EAN)	5350604210028