

## Cooling unit NEMA / type 4X



### Description


|                            |                                  |
|----------------------------|----------------------------------|
| <b>Order Number:</b>       | 57260062                         |
| <b>Colour:</b>             | -                                |
| <b>Housing Material:</b>   | Mild steel, powder coated        |
| <b>Ingress Protection:</b> | IP 56 / Type 12, 3, 3R, 4, 4X    |
| <b>SK notes:</b>           | with heater<br>with metal filter |
| <b>Optional:</b>           | -                                |
| <b>Approvals:</b>          | CE, cURus, cULus                 |
| <b>UL File Number:</b>     | cURus (SA32278), cULus (E498756) |

## Technical Data

|                                              |                                                                              |
|----------------------------------------------|------------------------------------------------------------------------------|
| <b>Cooling capacity L35L35:</b>              | 2.5 kW @ 50 Hz<br>2.5 kW @ 60 Hz                                             |
| <b>Cooling capacity L35L50:</b>              | 1.97 kW @ 50 Hz<br>2.04 kW @ 60 Hz                                           |
| <b>Compressor type:</b>                      | Rotary piston compressor                                                     |
| <b>Refrigerant / GWP:</b>                    | R134a / 1430                                                                 |
| <b>Refrigerant charge:</b>                   | 950 g / 33.5 oz                                                              |
| <b>High / low Pressure:</b>                  | 29.3 / 6.1 bar<br>425 / 88 psig                                              |
| <b>Operating Temperature Range:</b>          | -40°C - 55°C                                                                 |
| <b>Air flow volume (system / unimpeded):</b> | Ambient air circuit: 765 / 1200 m³/h<br>Cabinet air circuit: 950 / 1200 m³/h |
| <b>Mounting:</b>                             | Wall mounted                                                                 |
| <b>Dimensions A x B x C (D+E):</b>           | 1,550 x 457 x 355 mm                                                         |
| <b>Weight:</b>                               | 78 kg                                                                        |
| <b>Voltage / Frequency:</b>                  | 230 V ~ 50/60 Hz                                                             |
| <b>UL Voltage / Frequency:</b>               | 230 V ~ 60 Hz                                                                |
| <b>Current L35L35:</b>                       | 4.4 A @ 50 Hz<br>5.3 A @ 60 Hz                                               |
| <b>Starting current:</b>                     | 22.5 A                                                                       |
| <b>Max. current:</b>                         | 7.1 A                                                                        |
| <b>Nominal power L35L35:</b>                 | 1,03 kW @ 50 Hz<br>1,16 kW @ 60 Hz                                           |
| <b>Max. power:</b>                           | 1,30 kW @ 50 Hz<br>1,64 kW @ 60 Hz                                           |
| <b>Fuse:</b>                                 | 16 A (T)                                                                     |
| <b>Short-circuit current rating:</b>         | 5 kA                                                                         |
| <b>Connection:</b>                           | Connection terminal block                                                    |


Please click on the graphics to download.  
 More CAD drawings can be found under [Product Download](#).  
 > [Overview Product Group Cooling Units Outdoor / Type 4X](#)

**Performance graph:**

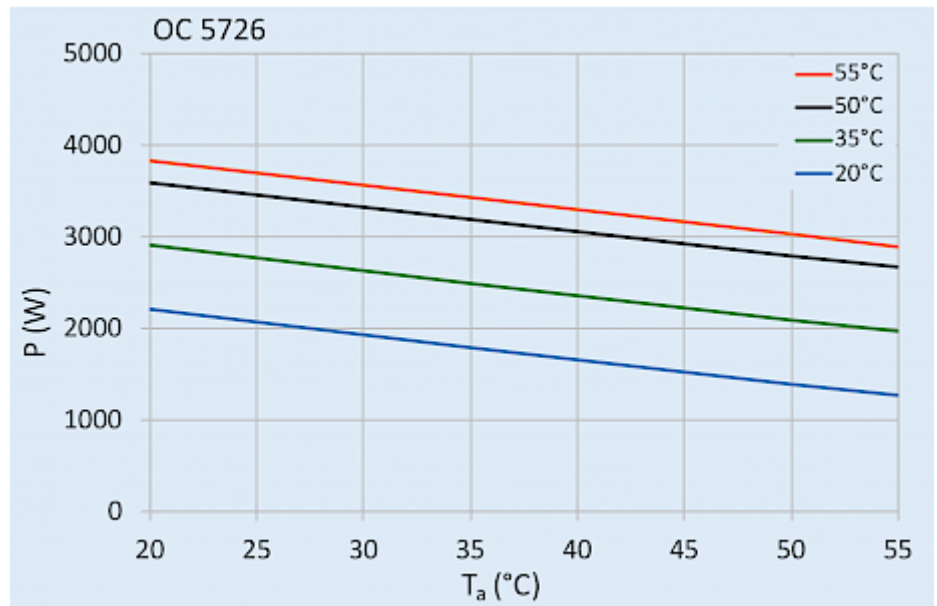

[click image to enlarge](#)

**Cut Out Dimension:**

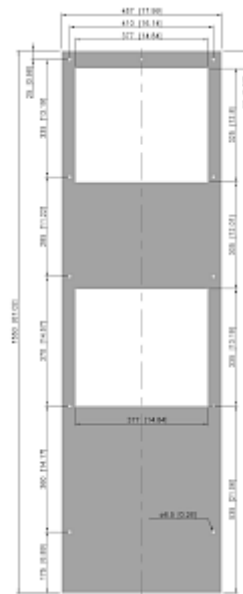

[click image to enlarge](#)