

Filter Fan



Description

Order Number:	4883A4000
Colour:	RAL 7035
Housing Material:	ABS Plastic
Ingress Protection:	IP 54, Type 12
Approvals:	CE, cURus, cULus
UL File Number:	E498756

Accessories:



[Hose-proof protection hood FC 4000 400](#)



[Hose-proof protection hood FC 4000 400 FDA](#)



[Adjustable Thermostat NO](#)

Technical Data

Operating Temperature Range: -10°C - +55°C

Air flow unimpeded: 820 m³/h

Dimensions A x B x C (D+E): 325 x 325 x 158.5 mm

Cut out dimensions: 291 x 291 (+1.5) mm

Voltage / Frequency: 230 V ~ 50/60 Hz

Rated current: 0.55 / 0.74 A

Power consumption: 125 / 166 W

Wall thickness: 1.5 - 2.5 mm

Filter class: G3 according to EN 779

Installation: Elastic clips

This filter fan has to be installed in a Listed, appropriately UL Environmentally Type Rated Industrial Control Panel. The device can be installed with or without vent filter according to UL508A and environmental requirements.

Noise level: 66 dB(A) @ 50 Hz
69.2 dB(A) @ 60 Hz

Please click on the graphics to download.


More CAD drawings can be found under [Product Download](#).

> [Overview Product Group Filter fans & exhaust filters](#)

Air flow:


Q = Air flow [cfm]

P = Static pressure [inH2O]

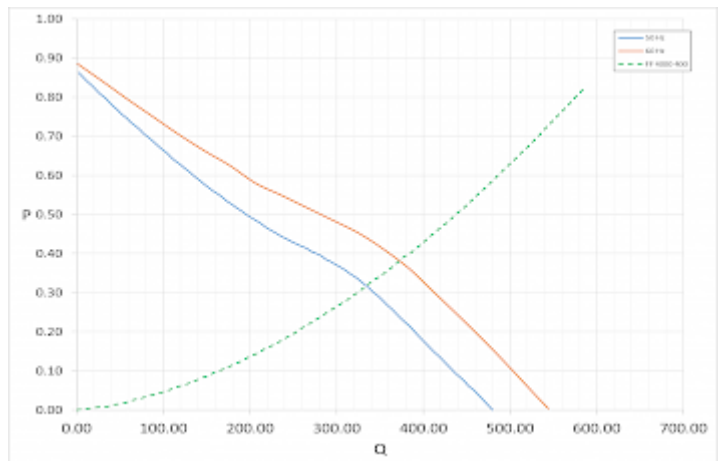

[click image to enlarge](#)

Cut Out Dimension:

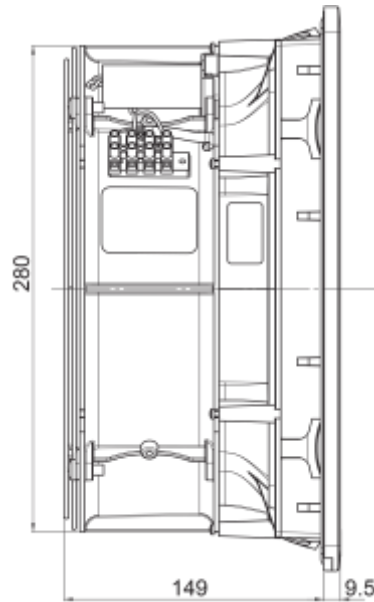

[click image to enlarge](#)

Order Information

In RAL 9005	4883A4003
With TYPE 3R protection part no.	4883A4033
Taric code	84145915
GTIN (EAN)	5350604100794