




AC/DC Converter



Doc No: 596005329 Rev 1.0

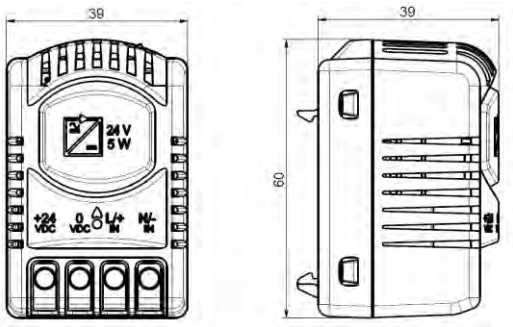

1+2
Installation



3+4
Removal

Input Voltage: 85-264 VAC / 100-300 VDC
Output Voltage: 24 VDC / 5 W

Electrical Protection: Class II
Ingress Protection: IP20
Operating Temperature: 0 ... 55 °C / 32 ... 131 °F
Operating Humidity: max 85 %r.H.
Connection: 0.5 ... 2.5 mm² / 14 ... 20 AWG
Housing Material: Plastic UL94V-2

Safety Information

This component must be installed/serviced by qualified personnel complying with the relevant safety regulations in force.

Installation

The device has been designed for installation on a DIN EN 60715 compliant standard rail.
Ventilation slots must not be obstructed.