



SEMITRANS® 2

SKM150GB12V

Features


- V-IGBT = 6. Generation Trench V-IGBT (Fuji)
- CAL4 = Soft switching 4. Generation CAL-diode
- Insulated copper baseplate using DBC technology (Direct Copper Bonding)
- Increased power cycling capability
- With integrated gate resistor
- UL recognized, file no. E63532
- Lowest switching losses at High di/dt

Typical Applications*

- AC inverter drives
- UPS
- Electronic welders

Remarks

- Case temperature limited to $T_c = 125^\circ\text{C}$ max.
- Recommended $T_{op} = -40 \dots +150^\circ\text{C}$
- Product reliability results valid for $T_j = 150^\circ\text{C}$



GB

Absolute Maximum Ratings

Symbol	Conditions		Values	Unit
IGBT				
V _{CES}	T _j = 25 °C		1200	V
I _C	T _j = 175 °C	T _c = 25 °C	231	A
		T _c = 80 °C	176	A
I _{Cnom}			150	A
I _{CRM}	I _{CRM} = 3 xI _{Cnom}		450	A
V _{GES}			-20 ... 20	V
t _{psc}	V _{CC} = 720 V V _{GE} ≤ 15 V V _{CES} ≤ 1200 V	T _j = 125 °C	10	μs
T _j			-40 ... 175	°C
Inverse diode				
I _F	T _j = 175 °C	T _c = 25 °C	189	A
		T _c = 80 °C	141	A
I _{Fnom}			150	A
I _{FRM}	I _{FRM} = 3xI _{Fnom}		450	A
I _{FSM}	t _p = 10 ms, sin 180°, T _j = 25 °C		900	A
T _j			-40 ... 175	°C
Module				
I _{t(RMS)}			200	A
T _{stg}			-40 ... 125	°C
V _{isol}	AC sinus 50 Hz, t = 1 min		4000	V

Characteristics

Symbol	Conditions	min.	typ.	max.	Unit
IGBT					
$V_{CE(sat)}$	$I_C = 150\text{ A}$ $V_{GE} = 15\text{ V}$ chipelevel	$T_j = 25^\circ\text{C}$	1.75	2.20	V
		$T_j = 150^\circ\text{C}$	2.20	2.48	V
V_{CE0}	chipelevel	$T_j = 25^\circ\text{C}$	0.94	1.04	V
		$T_j = 150^\circ\text{C}$	0.88	0.98	V
r_{CE}	$V_{GE} = 15\text{ V}$ chipelevel	$T_j = 25^\circ\text{C}$	5.4	7.7	$\text{m}\Omega$
		$T_j = 150^\circ\text{C}$	8.8	10	$\text{m}\Omega$
$V_{GE(th)}$	$V_{GE} = V_{CE}, I_C = 6\text{ mA}$	5.5	6	6.5	V
I_{CES}	$V_{GE} = 0\text{ V}$ $V_{CE} = 1200\text{ V}$	$T_j = 25^\circ\text{C}$		0.3	mA
		$T_j = 150^\circ\text{C}$	-		mA
C_{ies}	$V_{CE} = 25\text{ V}$ $V_{GE} = 0\text{ V}$	$f = 1\text{ MHz}$	9.0		nF
C_{oes}		$f = 1\text{ MHz}$	0.89		nF
C_{res}		$f = 1\text{ MHz}$	0.88		nF
Q_G	$V_{GE} = -8\text{ V} \dots +15\text{ V}$		1650		nC
R_{Gint}	$T_j = 25^\circ\text{C}$		5.0		Ω
$t_{d(on)}$	$V_{CC} = 600\text{ V}$ $I_C = 150\text{ A}$	$T_j = 150^\circ\text{C}$	258		ns
t_r	$V_{GE} = +15/-15\text{ V}$ $R_{G on} = 1.5\text{ }\Omega$	$T_j = 150^\circ\text{C}$	32		ns
E_{on}	$R_{G off} = 1.5\text{ }\Omega$	$T_j = 150^\circ\text{C}$	13.5		mJ
$t_{d(off)}$	$di/dt_{on} = 5400\text{ A}/\mu\text{s}$ $di/dt_{off} = 1800\text{ A}/\mu\text{s}$	$T_j = 150^\circ\text{C}$	388		ns
t_f	$du/dt = 8100\text{ V}/\mu\text{s}$	$T_j = 150^\circ\text{C}$	62		ns
E_{off}		$T_j = 150^\circ\text{C}$	14.2		mJ
$R_{th(j-c)}$	per IGBT			0.19	K/W



SEMITRANS® 2

SKM150GB12V

Features

- V-IGBT = 6. Generation Trench V-IGBT (Fuji)
- CAL4 = Soft switching 4. Generation CAL-diode
- Insulated copper baseplate using DBC technology (Direct Copper Bonding)
- Increased power cycling capability
- With integrated gate resistor
- UL recognized, file no. E63532
- Lowest switching losses at High di/dt

Typical Applications*


- AC inverter drives
- UPS
- Electronic welders

Remarks

- Case temperature limited to $T_c = 125^\circ\text{C}$ max.
- Recommended $T_{op} = -40 \dots +150^\circ\text{C}$
- Product reliability results valid for $T_j = 150^\circ\text{C}$

Characteristics

Symbol	Conditions	min.	typ.	max.	Unit
Inverse diode					
$V_F = V_{EC}$	$I_F = 150\text{ A}$ $V_{GE} = 0\text{ V}$ chipllevel		$T_j = 25^\circ\text{C}$ $T_j = 150^\circ\text{C}$	2.14 2.46	V
V_{F0}	chipllevel		$T_j = 25^\circ\text{C}$ $T_j = 150^\circ\text{C}$	1.30 0.90	V
r_F	chipllevel		$T_j = 25^\circ\text{C}$ $T_j = 150^\circ\text{C}$	5.6 7.8	mΩ
I_{RRM}	$I_F = 150\text{ A}$		$T_j = 150^\circ\text{C}$	165	A
Q_{rr}	$di/dt_{off} = 5800\text{ A}/\mu\text{s}$ $V_{GE} = \pm 15\text{ V}$		$T_j = 150^\circ\text{C}$	22	μC
E_{rr}	$V_{CC} = 600\text{ V}$		$T_j = 150^\circ\text{C}$	8.5	mJ
$R_{th(j-c)}$	per diode			0.31	K/W
Module					
L_{CE}				30	nH
$R_{CC'+EE'}$	measured per switch	$T_C = 25^\circ\text{C}$ $T_C = 125^\circ\text{C}$		0.65 1.09	mΩ
$R_{th(c-s)}$	calculated without thermal coupling ($\lambda_{grease} = 0.81\text{ W}/(\text{m}^2\text{K})$)			0.04 0.05	K/W
M_s	to heat sink M6			3 5	Nm
M_t		to terminals M5		2.5 5	Nm
				-	Nm
w				160	g



GB

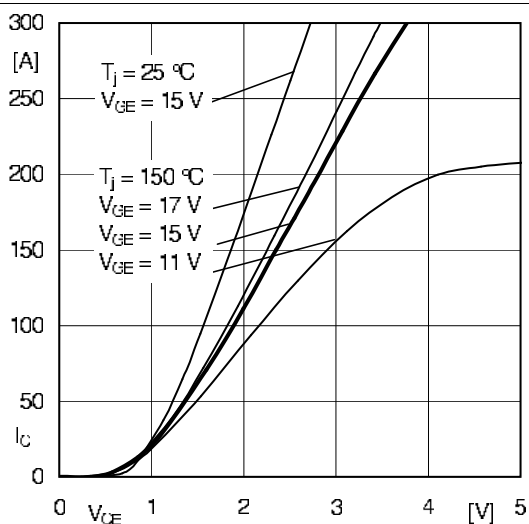


Fig. 1: Typ. output characteristic, inclusive $R_{CC'} + E_{E'}$

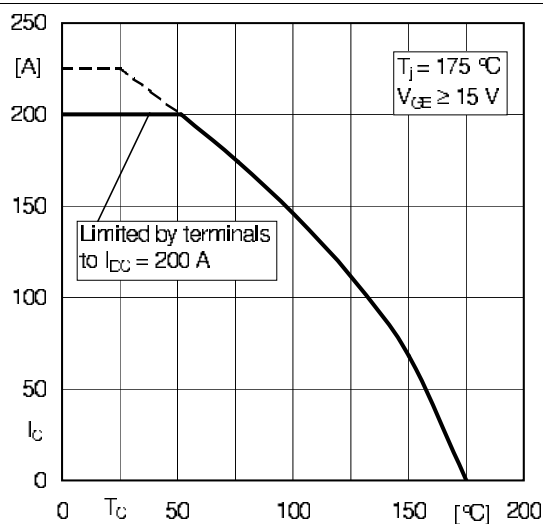


Fig. 2: Rated current vs. temperature $I_C = f(T_C)$

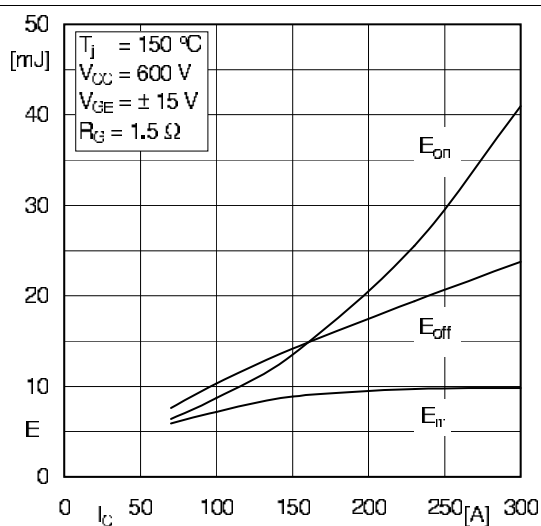


Fig. 3: Typ. turn-on /-off energy = $f(I_C)$

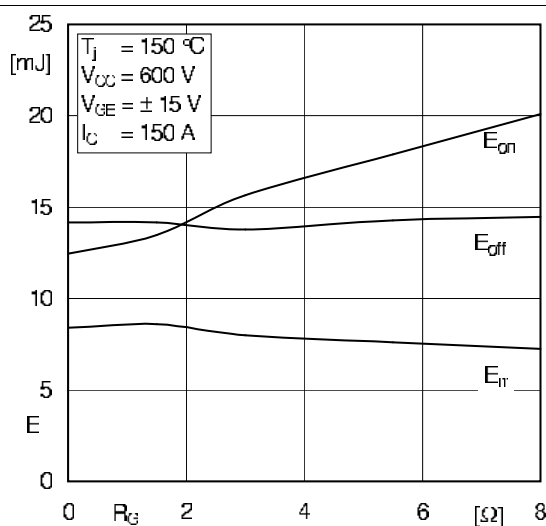


Fig. 4: Typ. turn-on /-off energy = $f(R_G)$

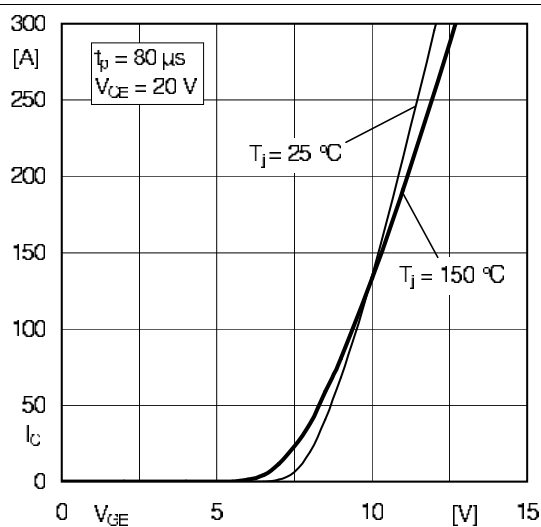


Fig. 5: Typ. transfer characteristic

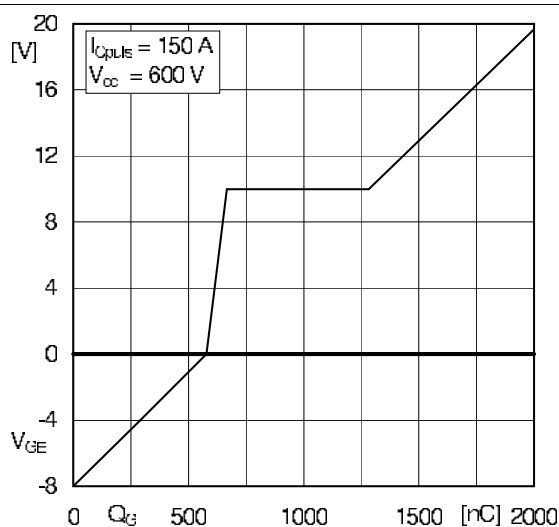


Fig. 6: Typ. gate charge characteristic

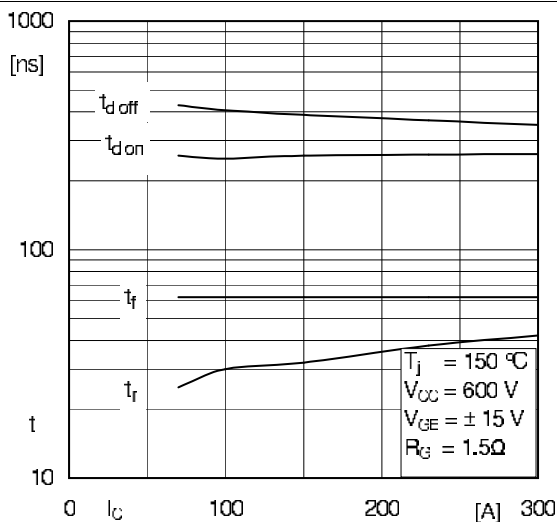


Fig. 7: Typ. switching times vs. I_C

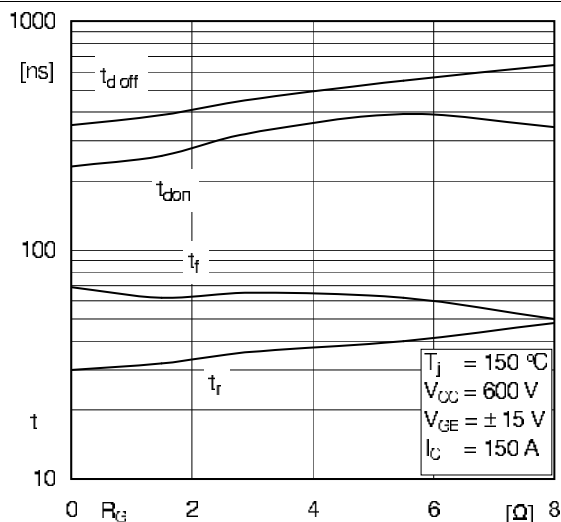


Fig. 8: Typ. switching times vs. gate resistor R_G

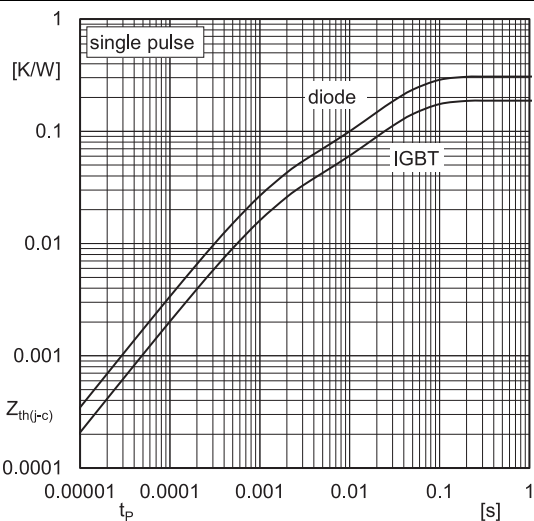


Fig. 9: Transient thermal impedance

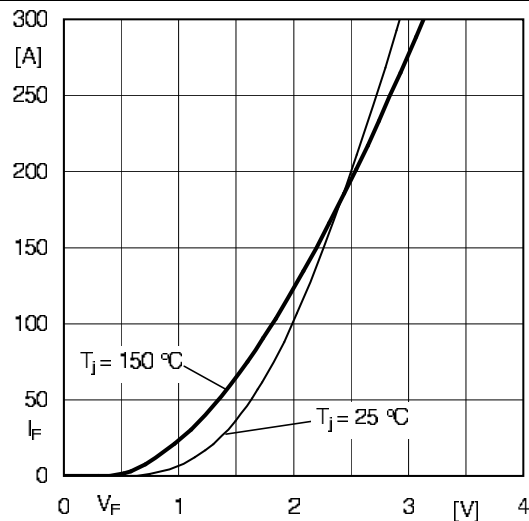


Fig. 10: Typ. CAL diode forward charact., incl. $R_{CC'} + EE'$

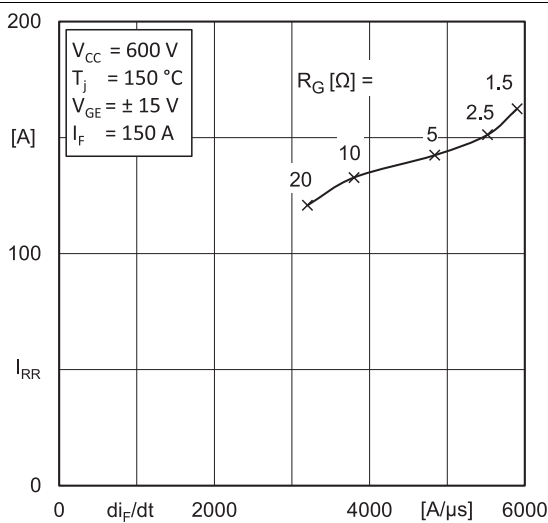


Fig. 11: CAL diode peak reverse recovery current

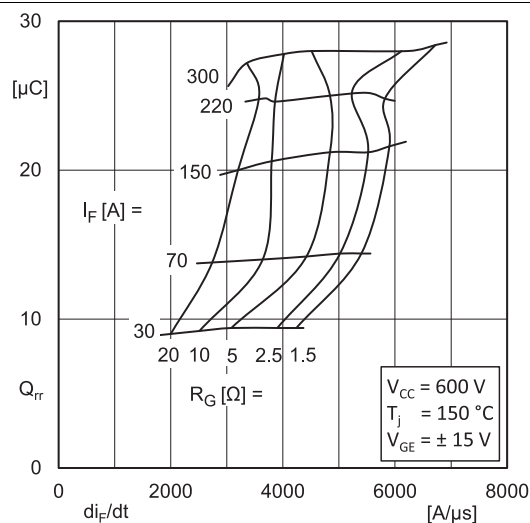


Fig. 12: Typ. CAL diode peak reverse recovery charge

max. 7mm

2,8x0,5

23±0,3

23±0,3

5,5

29,5^{+0,5}_{-0,2}

22,1±0,5

5,3^{+0,1}_{-0,2}


28,9±0,5

30,1±0,5

Technical drawing of a 5-pin DIN connector. The drawing shows the front and side views with the following dimensions and labels:

- Overall Dimensions:**
 - Overall width: 94
 - Overall height: 34
 - Distance between mounting holes: 80 ± 0,4
- Pin Dimensions and Spacing:**
 - Pin 1 diameter: $\phi 6,4$
 - Pin 1 to Pin 2 distance: 16,6 ± 0,4
 - Pin 2 to Pin 3 distance: 26 ± 0,4
 - Pin 3 to Pin 4 distance: 17
 - Pin 4 to Pin 5 distance: 6
 - Pin 5 to Pin 6 distance: 6
 - Pin 6 to Pin 7 distance: 17
 - Pin 7 to Pin 8 distance: 6
 - Pin 8 to Pin 9 distance: 17
 - Pin 9 to Pin 10 distance: 6
 - Pin 10 to Pin 11 distance: 17
 - Pin 11 to Pin 12 distance: 6
 - Pin 12 to Pin 13 distance: 17
 - Pin 13 to Pin 14 distance: 6
 - Pin 14 to Pin 15 distance: 17
 - Pin 15 to Pin 16 distance: 6
 - Pin 16 to Pin 17 distance: 17
 - Pin 17 to Pin 18 distance: 6
 - Pin 18 to Pin 19 distance: 17
 - Pin 19 to Pin 20 distance: 6
 - Pin 20 to Pin 21 distance: 17
 - Pin 21 to Pin 22 distance: 6
 - Pin 22 to Pin 23 distance: 17
 - Pin 23 to Pin 24 distance: 6
 - Pin 24 to Pin 25 distance: 17
 - Pin 25 to Pin 26 distance: 6
 - Pin 26 to Pin 27 distance: 17
 - Pin 27 to Pin 28 distance: 6
 - Pin 28 to Pin 29 distance: 17
 - Pin 29 to Pin 30 distance: 6
 - Pin 30 to Pin 31 distance: 17
 - Pin 31 to Pin 32 distance: 6
 - Pin 32 to Pin 33 distance: 17
 - Pin 33 to Pin 34 distance: 6
 - Pin 34 to Pin 35 distance: 17
 - Pin 35 to Pin 36 distance: 6
 - Pin 36 to Pin 37 distance: 17
 - Pin 37 to Pin 38 distance: 6
 - Pin 38 to Pin 39 distance: 17
 - Pin 39 to Pin 40 distance: 6
 - Pin 40 to Pin 41 distance: 17
 - Pin 41 to Pin 42 distance: 6
 - Pin 42 to Pin 43 distance: 17
 - Pin 43 to Pin 44 distance: 6
 - Pin 44 to Pin 45 distance: 17
 - Pin 45 to Pin 46 distance: 6
 - Pin 46 to Pin 47 distance: 17
 - Pin 47 to Pin 48 distance: 6
 - Pin 48 to Pin 49 distance: 17
 - Pin 49 to Pin 50 distance: 6
 - Pin 50 to Pin 51 distance: 17
 - Pin 51 to Pin 52 distance: 6
 - Pin 52 to Pin 53 distance: 17
 - Pin 53 to Pin 54 distance: 6
 - Pin 54 to Pin 55 distance: 17
 - Pin 55 to Pin 56 distance: 6
 - Pin 56 to Pin 57 distance: 17
 - Pin 57 to Pin 58 distance: 6
 - Pin 58 to Pin 59 distance: 17
 - Pin 59 to Pin 60 distance: 6
 - Pin 60 to Pin 61 distance: 17
 - Pin 61 to Pin 62 distance: 6
 - Pin 62 to Pin 63 distance: 17
 - Pin 63 to Pin 64 distance: 6
 - Pin 64 to Pin 65 distance: 17
 - Pin 65 to Pin 66 distance: 6
 - Pin 66 to Pin 67 distance: 17
 - Pin 67 to Pin 68 distance: 6
 - Pin 68 to Pin 69 distance: 17
 - Pin 69 to Pin 70 distance: 6
 - Pin 70 to Pin 71 distance: 17
 - Pin 71 to Pin 72 distance: 6
 - Pin 72 to Pin 73 distance: 17
 - Pin 73 to Pin 74 distance: 6
 - Pin 74 to Pin 75 distance: 17
 - Pin 75 to Pin 76 distance: 6
 - Pin 76 to Pin 77 distance: 17
 - Pin 77 to Pin 78 distance: 6
 - Pin 78 to Pin 79 distance: 17
 - Pin 79 to Pin 80 distance: 6
 - Pin 80 to Pin 81 distance: 17
 - Pin 81 to Pin 82 distance: 6
 - Pin 82 to Pin 83 distance: 17
 - Pin 83 to Pin 84 distance: 6
 - Pin 84 to Pin 85 distance: 17
 - Pin 85 to Pin 86 distance: 6
 - Pin 86 to Pin 87 distance: 17
 - Pin 87 to Pin 88 distance: 6
 - Pin 88 to Pin 89 distance: 17
 - Pin 89 to Pin 90 distance: 6
 - Pin 90 to Pin 91 distance: 17
 - Pin 91 to Pin 92 distance: 6
 - Pin 92 to Pin 93 distance: 17
 - Pin 93 to Pin 94 distance: 6
 - Pin 94 to Pin 95 distance: 17
 - Pin 95 to Pin 96 distance: 6
 - Pin 96 to Pin 97 distance: 17
 - Pin 97 to Pin 98 distance: 6
 - Pin 98 to Pin 99 distance: 17
 - Pin 99 to Pin 100 distance: 6
 - Pin 100 to Pin 101 distance: 17
 - Pin 101 to Pin 102 distance: 6
 - Pin 102 to Pin 103 distance: 17
 - Pin 103 to Pin 104 distance: 6
 - Pin 104 to Pin 105 distance: 17
 - Pin 105 to Pin 106 distance: 6
 - Pin 106 to Pin 107 distance: 17
 - Pin 107 to Pin 108 distance: 6
 - Pin 108 to Pin 109 distance: 17
 - Pin 109 to Pin 110 distance: 6
 - Pin 110 to Pin 111 distance: 17
 - Pin 111 to Pin 112 distance: 6
 - Pin 112 to Pin 113 distance: 17
 - Pin 113 to Pin 114 distance: 6
 - Pin 114 to Pin 115 distance: 17
 - Pin 115 to Pin 116 distance: 6
 - Pin 116 to Pin 117 distance: 17
 - Pin 117 to Pin 118 distance: 6
 - Pin 118 to Pin 119 distance: 17
 - Pin 119 to Pin 120 distance: 6
 - Pin 120 to Pin 121 distance: 17
 - Pin 121 to Pin 122 distance: 6
 - Pin 122 to Pin 123 distance: 17
 - Pin 123 to Pin 124 distance: 6
 - Pin 124 to Pin 125 distance: 17
 - Pin 125 to Pin 126 distance: 6
 - Pin 126 to Pin 127 distance: 17
 - Pin 127 to Pin 128 distance: 6
 - Pin 128 to Pin 129 distance: 17
 - Pin 129 to Pin 130 distance: 6
 - Pin 130 to Pin 131 distance: 17
 - Pin 131 to Pin 132 distance: 6
 - Pin 132 to Pin 133 distance: 17
 - Pin 133 to Pin 134 distance: 6
 - Pin 134 to Pin 135 distance: 17
 - Pin 135 to Pin 136 distance: 6
 - Pin 136 to Pin 137 distance: 17
 - Pin 137 to Pin 138 distance: 6
 - Pin 138 to Pin 139 distance: 17
 - Pin 139 to Pin 140 distance: 6
 - Pin 140 to Pin 141 distance: 17
 - Pin 141 to Pin 142 distance: 6
 - Pin 142 to Pin 143 distance: 17
 - Pin 143 to Pin 144 distance: 6
 - Pin 144 to Pin 145 distance: 17
 - Pin 145 to Pin 146 distance: 6
 - Pin 146 to Pin 147 distance: 17
 - Pin 147 to Pin 148 distance: 6
 - Pin 148 to Pin 149 distance: 17
 - Pin 149 to Pin 150 distance: 6
 - Pin 150 to Pin 151 distance: 17
 - Pin 151 to Pin 152 distance: 6
 - Pin 152 to Pin 153 distance: 17
 - Pin 153 to Pin 154 distance: 6
 - Pin 154 to Pin 155 distance: 17
 - Pin 155 to Pin 156 distance: 6
 - Pin 156 to Pin 157 distance: 17
 - Pin 157 to Pin 158 distance: 6
 - Pin 158 to Pin 159 distance: 17
 - Pin 159 to Pin 160 distance: 6
 - Pin 160 to Pin 161 distance: 17
 - Pin 161 to Pin 162 distance: 6
 - Pin 162 to Pin 163 distance: 17
 - Pin 163 to Pin 164 distance: 6
 - Pin 164 to Pin 165 distance: 17
 - Pin 165 to Pin 166 distance: 6
 - Pin 166 to Pin 167 distance: 17
 - Pin 167 to Pin 168 distance: 6
 - Pin 168 to Pin 169 distance: 17
 - Pin 169 to Pin 170 distance: 6
 - Pin 170 to Pin 171 distance: 17
 - Pin 171 to Pin 172 distance: 6
 - Pin 172 to Pin 173 distance: 17
 - Pin 173 to Pin 174 distance: 6
 - Pin 174 to Pin 175 distance: 17
 - Pin 175 to Pin 176 distance: 6
 - Pin 176 to Pin 177 distance: 17
 - Pin 177 to Pin 178 distance: 6
 - Pin 178 to Pin 179 distance: 17
 - Pin 179 to Pin 180 distance: 6
 - Pin 180 to Pin 181 distance: 17
 - Pin 181 to Pin 182 distance: 6
 - Pin 182 to Pin 183 distance: 17
 - Pin 183 to Pin 184 distance: 6
 - Pin 184 to Pin 185 distance: 17
 - Pin 185 to Pin 186 distance: 6
 - Pin 186 to Pin 187 distance: 17
 - Pin 187 to Pin 188 distance: 6
 - Pin 188 to Pin 189 distance: 17
 - Pin 189 to Pin 190 distance: 6
 - Pin 190 to Pin 191 distance: 17
 - Pin 191 to Pin 192 distance: 6
 - Pin 192 to Pin 193 distance: 17
 - Pin 193 to Pin 194 distance:

SEMITRANS 2

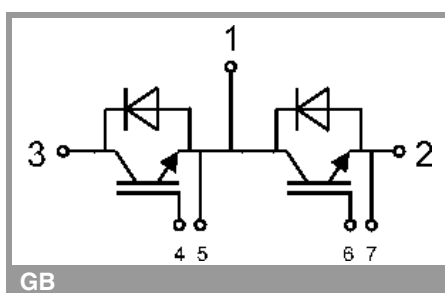

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, chapter IX.

***IMPORTANT INFORMATION AND WARNINGS**

The specifications of SEMIKRON products may not be considered as guarantee or assurance of product characteristics ("Beschaffenheitsgarantie"). The specifications of SEMIKRON products describe only the usual characteristics of products to be expected in typical applications, which may still vary depending on the specific application. Therefore, products must be tested for the respective application in advance. Application adjustments may be necessary. The user of SEMIKRON products is responsible for the safety of their applications embedding SEMIKRON products and must take adequate safety measures to prevent the applications from causing a physical injury, fire or other problem if any of SEMIKRON products become faulty. The user is responsible to make sure that the application design is compliant with all applicable laws, regulations, norms and standards. Except as otherwise explicitly approved by SEMIKRON in a written document signed by authorized representatives of SEMIKRON, SEMIKRON products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury. No representation or warranty is given and no liability is assumed with respect to the accuracy, completeness and/or use of any information herein, including without limitation, warranties of non-infringement of intellectual property rights of any third party. SEMIKRON does not assume any liability arising out of the applications or use of any product; neither does it convey any license under its patent rights, copyrights, trade secrets or other intellectual property rights, nor the rights of others. SEMIKRON makes no representation or warranty of non-infringement or alleged non-infringement of intellectual property rights of any third party which may arise from applications. Due to technical requirements our products may contain dangerous substances. For information on the types in question please contact the nearest SEMIKRON sales office. This document supersedes and replaces all information previously supplied and may be superseded by updates. SEMIKRON reserves the right to make changes.