


Empty enclosure

## GTi 3-KT-t

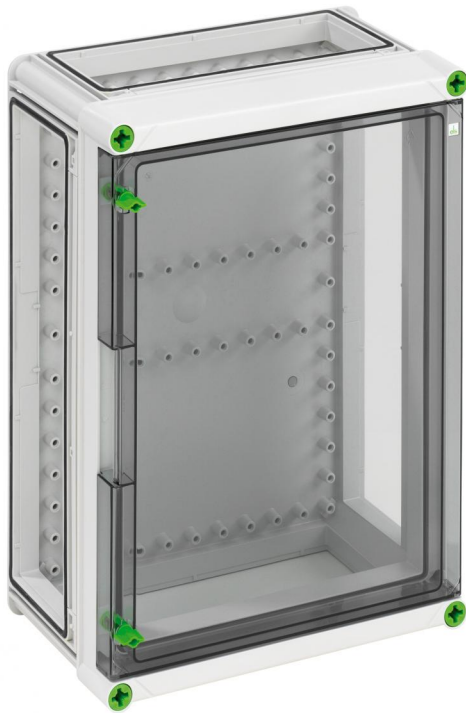

### GTi 3-KT-t

Empty enclosure

CUSTOMIZABLE

Productnumber: 01100301

Dimensions: 320 x 440 x 179 mm

Empty Enclosure - Industrial Quality -, 3 x housing connectors (GGV)

with transparent hinged door



## Technical Data

### electrical characteristics

|                              |        |
|------------------------------|--------|
| Rated insulation voltage AC: | 690 V  |
| Rated insulation voltage DC: | 1000 V |
| Protection class:            | II     |
| Type of protection:          | IP65   |
| Protection type UL:          | 3R     |

### Colours

|                   |      |
|-------------------|------|
| Base unit colour: | grey |
|-------------------|------|

### Dimensions

|         |        |
|---------|--------|
| Width:  | 320 mm |
| Length: | 440 mm |
| Height: | 179 mm |

### Dimensions

|               |        |
|---------------|--------|
| Inner height: | 157 mm |
|---------------|--------|

### Material characteristics

|                                                    |        |
|----------------------------------------------------|--------|
| suitable for exterior use:                         | yes    |
| Industry quality:                                  | yes    |
| Halogen free:                                      | yes    |
| Flammability class according with UL94:            | V2     |
| Glow-wire flammability according to EN 60695-2-11: | 960 °C |

### mechanical properties

|                     |                 |
|---------------------|-----------------|
| Type of fastening:  | Surface mounted |
| Impact strength:    | IK08            |
| Cover screw torque: | 2.5 Nm          |
| Stackable:          | yes             |

## Ambient conditions

|                              |        |
|------------------------------|--------|
| max. relative humidity 25°C: | 95 %   |
| max. relative humidity 40°C: | 50 %   |
| Min. ambient temperature:    | -35 °C |
| Max. ambient temperature:    | 80 °C  |
| 24h ambient temperature:     | 60 °C  |

## Material

|                       |                                   |
|-----------------------|-----------------------------------|
| Base unit material:   | Polycarbonate                     |
| Cover material:       | Polycarbonate                     |
| Sealing material:     | Polyurethane                      |
| Cover screw material: | Polyamide, glass-fibre reinforced |

## Accessories

[07251301 - GFS 13-m - Flange set](#)