


Terminal

AKL 125

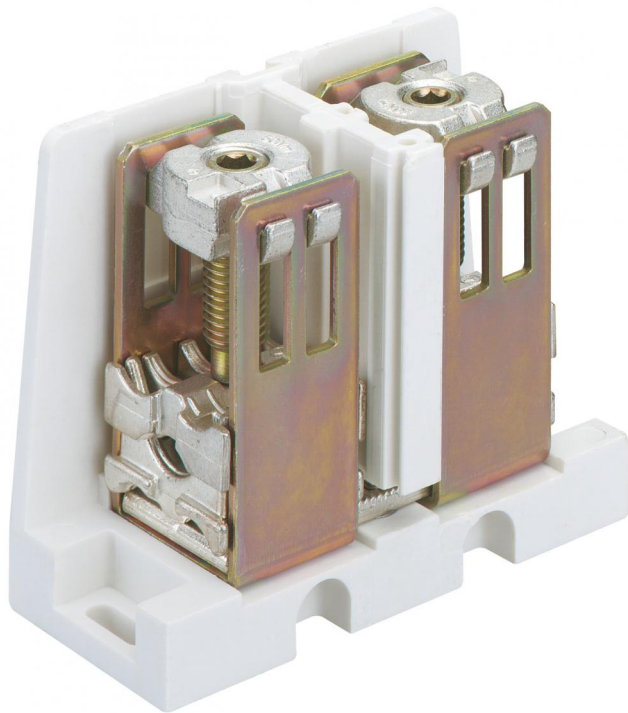

AKL 125

Terminal

Productnumber: 07612501

Dimensions: 40 x 115 x 105 mm

Connecting terminal, 1-pole, stackable, for one or more-wired leads and for laminated flat copper

250 A, for CU conductors 1x (35-150)re/rm/se/sm, 2x (16-70)re/rm/se/sm, for AL conductors 1x (35-150)re/rm/se/sm, 1x (50-120)sm, 2x (16-70)re/se, 2x (35-50)sm

Technical Data

electrical characteristics

Rated operating voltage AC:	690 V
Rated operating voltage DC:	750 V
Strip length:	30 mm
Clamping points per pole:	2
Connection 2: Terminal points per pole:	2
Number of poles:	1

Dimensions

Width:	40 mm
Length:	115 mm
Height:	105 mm

Material characteristics

Industry quality:	no
-------------------	----

mechanical properties

Tightening moment:	20 Nm
Connection 2: Tightening torque:	20 Nm

Material

Insulating body material:	Thermoplastic
---------------------------	---------------