


**Terminal**

# AKL 140

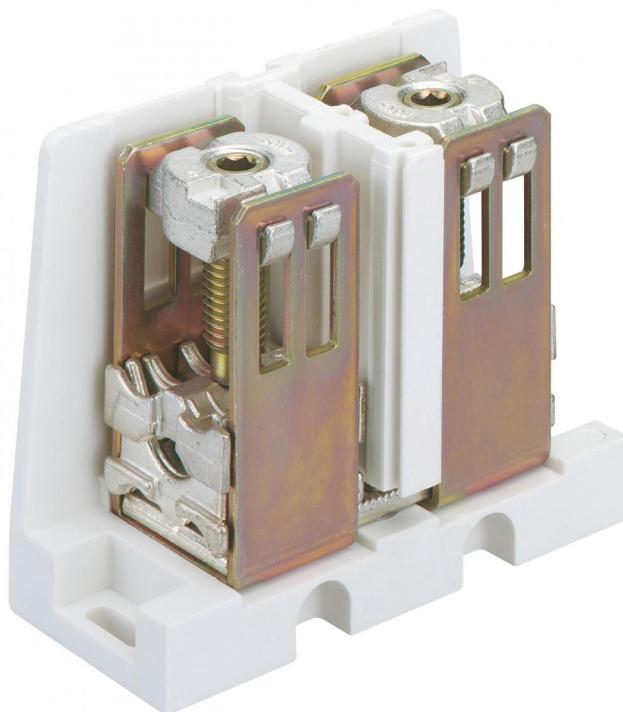

## AKL 140

**Terminal**

Productnumber: 07614001

Dimensions: 55 x 115 x 120 mm

Connecting terminal, 1-pole, stackable, for one or more-wired leads and for laminated flat copper

**400 A, for CU conductors 1x (50-240)re/rm/se/sm, 2x (25-120)re/rm/se/sm, for AL conductors 1x (50-240)re/rm/se/sm, 1x (95-195)sm, 2x (25-120)re/se, 2x (50-95)sm, for laminated flat copper 16 x 10 mm**

## Technical Data

### electrical characteristics

Rated operating voltage AC:	690 V
Rated operating voltage DC:	750 V
Strip length:	30 mm
Clamping points per pole:	2
Connection 2: Terminal points per pole:	2
Number of poles:	1

### Dimensions

Width:	55 mm
Length:	115 mm
Height:	120 mm

### Material characteristics

Industry quality:	no
-------------------	----

### mechanical properties

Tightening moment:	40 Nm
Connection 2: Tightening torque:	40 Nm

### Material

Insulating body material:	Thermoplastic
---------------------------	---------------