


## Terminal

# URS RK1-150mm<sup>2</sup>

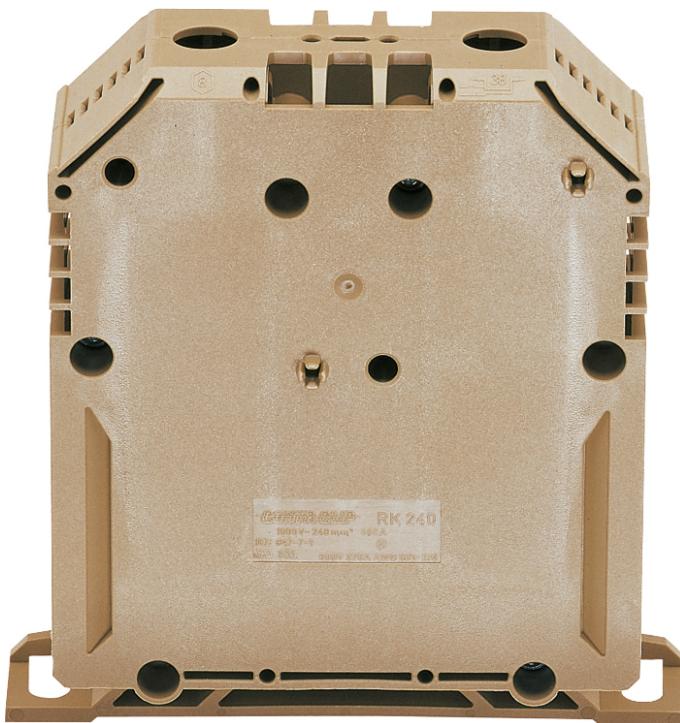

## Technical Data

### electrical characteristics

Rated operating voltage AC:	690 V
Rated operating voltage DC:	750 V
Rated insulation voltage AC:	1000 V
Strip length:	38 mm
Rated connecting capacity:	150 mm <sup>2</sup>
Rated current:	309 Ampere
Clamping points per pole:	2
Number of poles:	1

### Dimensions

Width:	31 mm
Length:	109 mm
Height:	99 mm

## URS RK1-150mm<sup>2</sup>

### Terminal

Productnumber: 67065001

Dimensions: 31 x 109 x 99 mm

Connecting terminal, 1-pole, stackable, for one or more-wired leads and for laminated flat copper

### Upgrade kit for 5-pole 1-pole

### Material characteristics

Industry quality: no

Flammability class according with UL94: V2

### mechanical properties

Tightening moment: 20 Nm

### Material

Insulating body material: Thermoplastic