


Meter housing

AKi-Z 410

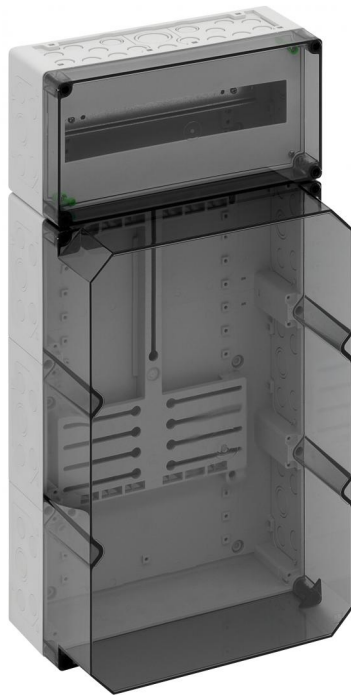

AKi-Z 410

Meter housing

Productnumber: 75241001

Dimensions: 300 x 600 x 210 mm

Meter enclosure - Industrial Quality -, with transparent cover, standard version sealable, with meter crosspiece fitted for triphase counter and meter fixing screws, standard version sealable consumer space at the top, with 35 mm standard rails, With double membrane seals, Sealing and insulating plugs



Technical Data

electrical characteristics

Rated operating voltage AC:	400 V
Rated insulation voltage AC:	400 V
Protection class:	II
Type of protection:	IP65
Protection type UL:	not specified

Dimensions

Width:	300 mm
Length:	600 mm
Height:	210 mm

Material characteristics

suitable for exterior use:	yes
----------------------------	-----

Material characteristics

Industry quality:	yes
Halogen free:	yes
Flammability class according with UL94:	V2
Glow-wire flammability according to EN 60695-2-11:	850 °C

mechanical properties

Type of fastening:	Surface mounting
Impact strength:	IK08

Ambient conditions

max. relative humidity 25°C:	95 %
max. relative humidity 40°C:	50 %
Min. ambient temperature:	-25 °C
Max. ambient temperature:	40 °C
24h ambient temperature:	35 °C

Material

Base unit material:	Polycarbonate
Sealing material:	Polyurethane
Cover screw material:	Polyamide, glass-fibre reinforced