


Front part

FTF1

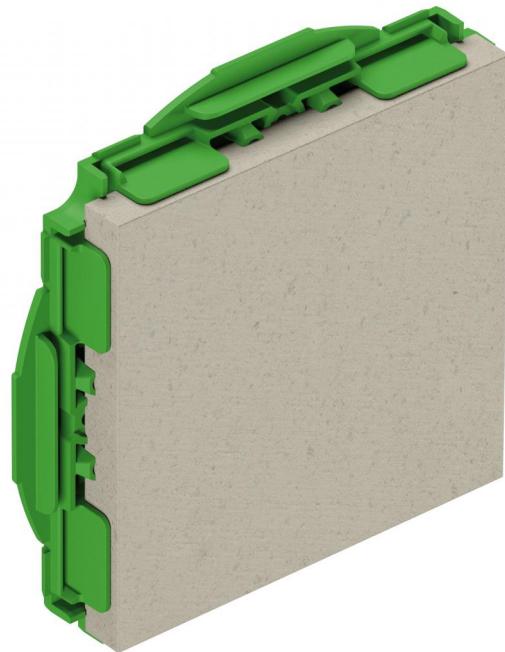

FTF1

Front part

Productnumber: 98211001

Dimensions: 145 x 145 x 27 mm

Front part, for use in combination with IBTLED 1-O installation box in site-cast concrete, with protection class IP30, Rated insulation voltage: 400V AC, Halogen free

with Fermacell® plasterboard variable up to max. 100 x 100 mm, adhesive fixing or nail installation



Technical Data

electrical characteristics

| | |
|------------------------------|-----------------------|
| Rated insulation voltage AC: | 400 V |
| Type of protection: | IP30 |
| Suitable for: | Concrete construction |

Colours

| | |
|---------------|------|
| Cover colour: | grey |
|---------------|------|

Dimensions

| | |
|---------|--------|
| Width: | 145 mm |
| Length: | 145 mm |
| Height: | 27 mm |

Material characteristics

| | |
|--|--------|
| Industry quality: | no |
| Halogen free: | yes |
| Flammability class according with UL94: | HB |
| Glow-wire flammability according to EN 60695-2-11: | 650 °C |

mechanical properties

| | |
|--------------------|--------------------------------------|
| Type of fastening: | adhesive fixing or nail installation |
| Type of accessory: | Universal front piece |