


## Large conduit box

# P 71 GRO-K

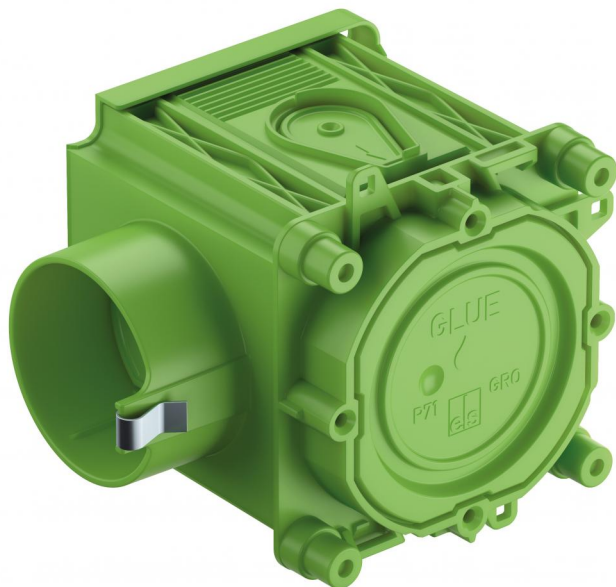

## P 71 GRO-K

### Large conduit box

Productnumber: 98477501

Dimensions: 71 x 71 x 76,5 mm

Large conduit box , especially for horizontal factory finishing, 1-part, diameter 60 mm Ø, 4 screw bosses with a 60 mm screw spacing, combinable, suitable for opposing formwork, combinable with a standard spacing of 71 mm, with protection class IP30, Rated insulation voltage: 400V AC, certified according to VDE (DIN EN 60670-1/-22 (VDE 0606-1/-22)), Halogen free

**with enlarged terminal compartment, , adhesive fixing, conduit adapter and additional conduit adapter with Easy-Cut-Membran, Sealing area M32 - M40**



## Technical Data

### electrical characteristics

|                              |                       |
|------------------------------|-----------------------|
| Rated insulation voltage AC: | 400 V                 |
| Type of protection:          | IP30                  |
| Suitable for:                | Concrete construction |
| Protection type UL:          | not specified         |

### Dimensions

|               |         |
|---------------|---------|
| Width:        | 71 mm   |
| Length:       | 71 mm   |
| Height:       | 76.5 mm |
| Inner height: | 72.9 mm |

### Material characteristics

|                   |    |
|-------------------|----|
| Industry quality: | no |
|-------------------|----|

## Material characteristics

|                                                    |        |
|----------------------------------------------------|--------|
| Halogen free:                                      | yes    |
| Flammability class according with UL94:            | HB     |
| Glow-wire flammability according to EN 60695-2-11: | 650 °C |

## mechanical properties

|                    |                 |
|--------------------|-----------------|
| Type of fastening: | adhesive fixing |
|--------------------|-----------------|

## Ambient conditions

|                              |        |
|------------------------------|--------|
| max. relative humidity 40°C: | 50 %   |
| Min. ambient temperature:    | -25 °C |
| Max. ambient temperature:    | 40 °C  |
| 24h ambient temperature:     | 35 °C  |

## Material

|                     |               |
|---------------------|---------------|
| Base unit material: | Plastic       |
| Cover material:     | Polypropylene |

## Certificates

|            |                                           |
|------------|-------------------------------------------|
| Test mark: | VDE (DIN EN 60670-1/-22 (VDE 0606-1/-22)) |
|------------|-------------------------------------------|

## Accessories

[98403201 - RA 32 - Conduit adapter](#)

[98404001 - RA 40 - Conduit adapter](#)