

AC/DC Power Supply**TMPW 10-J Series, 10 Watt**

- Compact chassis mount power module in 2.17" x 1.70" package
- Wide input voltage range 90-305 VAC
- Certified according to EN 60335-1 and IEC/EN/UL 62368-1
- I/O-Isolation 4'000 VAC
- Operating temperature range -40°C to +70°C
- No load input power <0.1W (acc. ErP directive)
- High efficiency up to 86%
- Internal EN 55032 class B filter
- Protection class II prepared
- 3 year product warranty

UL 62368-1 IEC 60335-1
IEC 62368-1

The TMPW 10-J is a 10 Watt AC/DC series with an extended input range of 90-305 VAC and is suitable for industrial and household/building technology applications and comes in a compact encapsulated plastic case. The 305 VAC (277 VAC $\pm 10\%$) threshold is derived from a 480 VAC three-phase supply voltage often used in heavy industrial applications. Through the increased voltage level, the drawn current from the load is effectively reduced, which allows for an overall more compact and lightweight design approach. They offer an I/O-isolation voltage of 4000 VAC, a high temperature range of -40 to +70°C and are prepared for protection class II applications. Additionally, an internal EN 55032 class B filter saves valuable board space for an otherwise often mandatory external filter setup. An energy efficient design (<0.1 Watt standby power consumption) and safety approvals according to IEC/EN/UL 62368-1 and EN 60335-1 make this series suitable for a wide range of industrial and household/building technology applications.

Models

| Order Code | Output Power max. | Output Voltage nom. | Output Current max. | Efficiency typ. |
|----------------------|----------------------|------------------------|------------------------|--------------------|
| TMPW 10-105-J | | 5 VDC | 2'000 mA | 81 % |
| TMPW 10-112-J | | 12 VDC | 833 mA | 85 % |
| TMPW 10-115-J | 10 W | 15 VDC | 667 mA | 86 % |
| TMPW 10-124-J | | 24 VDC | 417 mA | 86 % |

OptionsTMPW-MK1 - Optional DIN-Rail Mounting Kit: www.tracopower.com/products/tmpw-mk1.pdf

Input Specifications

| | | |
|------------------------|-----------------------------|--|
| Input Voltage | - AC Range | Operational Range: 90 - 305 VAC (Full Range) |
| | - DC Range | Rated Range: 100 - 277 VAC (Full Range) |
| | | Operational Range: 100 - 430 VDC |
| | | Certified Range: 100 - 250 VDC |
| | | Polarity: +DC: N / -DC: L |
| | | (The rated range refers to 62368-1. For 60335-1 certification the rated input voltage is 100 - 240 VAC and DC input is not permitted.) |
| Input Frequency | | 47 - 63 Hz (designed to meet: 47 - 440 Hz) |
| Input Current | - Full Load & Vin = 230 VAC | 140 mA max. |
| | - Full Load & Vin = 115 VAC | 230 mA max. |
| Power Consumption | - At no load | 100 mW max. (Ready to meet ErP directive) |
| Input Inrush Current | - At 230 VAC | 60 A max. |
| | - At 115 VAC | 30 A max. |
| Recommended Input Fuse | | 1'600 mA (slow blow) |
| | | (The need of an external fuse has to be assessed in the final application.) |

Output Specifications

| | | |
|--|---|---|
| Voltage Set Accuracy | ±2% max. | |
| Regulation | - Input Variation (Vmin - Vmax) | 0.2% max. |
| | - Load Variation (0 - 100%) | 1% max. (5 & 12 Vout models) 0.5 % max. (other models) |
| Ripple and Noise (20 MHz Bandwidth) | 5 VDC model: | 60 mVp-p max. (w/ 0.1 µF // 47 µF) |
| | 12 VDC model: | 120 mVp-p max. (w/ 0.1 µF // 47 µF) |
| | 15 VDC model: | 150 mVp-p max. (w/ 0.1 µF // 47 µF) |
| | 24 VDC model: | 240 mVp-p max. (w/ 0.1 µF // 47 µF) |
| Capacitive Load | 5 VDC model: | 3'500 µF max. |
| | 12 VDC model: | 700 µF max. |
| | 15 VDC model: | 390 µF max. |
| | 24 VDC model: | 180 µF max. |
| Minimum Load | Not required | |
| Temperature Coefficient | ±0.02 %/K max. | |
| Hold-up Time | - At 230 VAC | 30 ms min. |
| Start-up Time | - At 230 VAC | 60 ms max. |
| | - At 115 VAC | 60 ms max. |
| Short Circuit Protection | Continuous, Automatic recovery | |
| Output Current Limitation | 140 - 235% of Iout max. | |
| Overvoltage Protection | 105 - 145% of Vout nom. (By Zener diode) | |
| Transient Response | - Response Deviation | 2% typ. / 3% max. (50% to 75% Load Step) |
| | - Response Time | 500 µs max. (50% to 75% Load Step) |

Safety Specifications

| | | |
|------------------|-----------------------------|--|
| Safety Standards | - IT / Multimedia Equipment | EN 62368-1 |
| | - Household | IEC 62368-1 |
| | - Power Transformers | UL 62368-1 |
| | - Certification Documents | EN 60335-1 |
| Protection Class | | IEC 60335-1 |
| | | IEC 61558-1 |
| | | IEC 61558-2-16 |
| | | www.tracopower.com/overview/tmpw10-j |
| | | Class I & II (Prepared): Reinforced Insulation |

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

| | |
|-----------------------|--------|
| Pollution Degree | PD 2 |
| Over Voltage Category | OVC II |

EMC Specifications

| | | |
|---------------|---|--|
| EMI Emissions | - Conducted Emissions - Radiated Emissions - Voltage Fluctuations & Flicker | EN 55032 class B (internal filter) EN 55032 class B (internal filter) EN 61000-3-3 |
| EMS Immunity | | EN 55024 (IT Equipment) EN 55035 (Multimedia) |
| | - Electrostatic Discharge | Air: EN 61000-4-2, ± 8 kV, perf. criteria A |
| | - RF Electromagnetic Field | Contact: EN 61000-4-2, ± 4 kV, perf. criteria A |
| | - EFT (Burst) / Surge | EN 61000-4-3, 3 V/m, perf. criteria A |
| | - Conducted RF Disturbances | EN 61000-4-4, ± 1 kV, perf. criteria A |
| | - PF Magnetic Field | L to L: EN 61000-4-5, ± 1 kV, perf. criteria A |
| | - Voltage Dips & Interruptions | EN 61000-4-6, 3 Vrms, perf. criteria A |
| | | Continuous: EN 61000-4-8, 1 A/m, perf. criteria A |
| | | 230 VAC / 50 Hz: EN 61000-4-11 |
| | | 30%, 25 periods, perf. criteria A |
| | | >95%, 250 periods, perf. criteria B |
| | | 115 VAC / 60 Hz: EN 61000-4-11 |
| | | 30%, 25 periods, perf. criteria A |
| | | >95%, 250 periods, perf. criteria B |

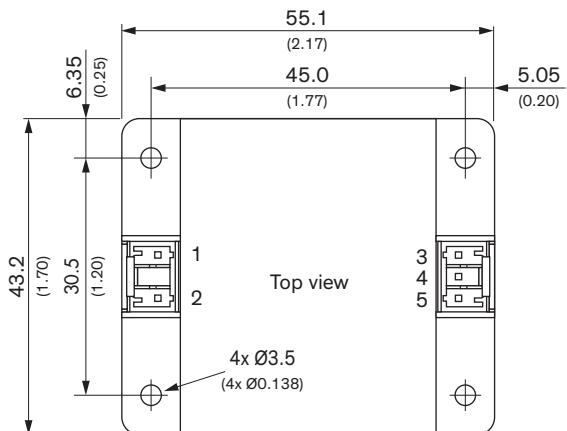
General Specifications

| | |
|---------------------------|---|
| Relative Humidity | 95% max. (non condensing) |
| Temperature Ranges | -40°C to +70°C |
| | -40°C to +85°C |
| Power Derating | 2.5 %/K above 50°C |
| | 2 %/V below 100 VAC |
| Cooling System | Natural convection (20 LFM) |
| Altitude During Operation | 5'000 m max. (acc. IEC 62368-1) 2'000 m max. (acc. IEC 60335-1) |
| Switching Frequency | 35 - 75 kHz (PWM, PFM) |
| Insulation System | Reinforced Insulation |
| Working Voltage (rated) | 254 VAC |
| Isolation Test Voltage | 4'000 VAC |
| Leakage Current | 250 μ A max. |
| Reliability | 450'000 h (MIL-HDBK-217F, ground benign) |
| Environment | IEC 60068-2-6 2 g, 3 axis, 60 min, 10-500 Hz, 10 min/cycle IEC 60068-2-27 |
| | - Mechanical Shock |
| Housing Material | Plastic resin (UL 94 V-0 rated) |
| Potting Material | Silicone (UL 94 V-0 rated) |
| Housing Type | Plastic Case |
| Mounting Type | Chassis Mount |
| Connection Type | Pin Connector |
| Weight | 65 g |
| Environmental Compliance | - REACH Declaration - RoHS Declaration REACH SVHC list compliant REACH Annex XVII compliant www.tracopower.com/info/reach-declaration.pdf www.tracopower.com/info/rohs-declaration.pdf Exemptions: 7c-I (RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (Q5A rule). The SCIP number is provided on request.) |

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Supporting Documents

Overview Link (for additional Documents)

www.tracopower.com/overview/tmpw10-j**Outline Dimensions**

| Pinout | |
|--------|-----------|
| Pin | Single |
| 1 | AC IN (L) |
| 2 | AC IN (N) |
| 3 | -Vout |
| 4 | NC |
| 5 | +Vout |

NC: Not connected

Mating Connector:

JST housing: PSIP-03V-LE-A

JST crimp terminals: SPSI-41T-M1.1

SPSI-001T-M1.1

